

Bright 1080p projection

EH335



Superior 1080p performance



- 1080p projection with 3,600 lumens and 20,000:1 contrast ratio**
- Extensive I/O support with HDMI, VGA-in, composite, audio-in, audio-out, USB power, RS-232C**
- Powerful 10 watt speaker enhances presentations and audio/video with crisp and clear sound**
- Optional HDCast Pro enables wireless mirroring and streaming**
- Minimal maintenance with 15,000 hour lamp life**



1080P

Full 3D



The Optoma EH335 is a bright 3,600 lumens 1080p projector optimized for small-to-medium rooms, such as classrooms, meeting rooms and training labs. Its brightness and 20,000:1 contrast ratio produces incredibly sharp and vivid images, even with moderate room light. Support for sRGB and REC.709 color profiles ensures accurate color reproduction whether the source is PC, Mac or video devices.

A 1.1x zoom delivers robust installation options while wall color adjustment optimizes brightness for projection onto varying color surfaces with the Optoma EH335. The powerful internal speaker, driven by 10 watts of power, can fill a room with loud and crisp audio to further enhance media and presentations.

Robust input options on the Optoma EH335 include HDMI, VGA and composite for connectivity to a wide range of devices. A 15,000-hour lamp life enables many years of use with minimal maintenance.

CONNECTIVITY (May require optional accessories)



Computers



Smart Phones



Tablets



3D Blu-ray/DVD Players



Camcorders



Apple TV®



Chromecast™

Bright 1080p projection - EH335

OPTICAL/TECHNICAL SPECIFICATIONS


Display Technology	Single 0.48" DMD S410, DC3 chip, DLP® Technology by Texas Instruments
Color Wheel	RYGCWB
Native Resolution	1080p (1920x1080)
Maximum Resolution	WUXGA (1920x1200)
Brightness	3600 ANSI lumens
Contrast Ratio	20,000:1
Displayable Colors	1.07 Billion
Lamp Life and Type*	15,000/12,000/10,000/4000 (Extreme Dimming/Dynamic/ECO/Bright) - 240W
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	± 40° vertical
Keystone Distortion	±1% max
Uniformity	70%
Offset	116%±5%
Aspect Ratio	16:9 (native), 4:3, 16:10 and LBX compatible
Throw Ratio	1.47 - 1.62
Projection Distance	3.2' - 35.29" (no zoom)
Image Size	28" - 301"
Projection Lens	F=2.41 ~2.53, f=21.85 ~ 24mm manual
Optical Zoom	1.1x
Digital Zoom	0.8 - 2.0
Audio	10W
Noise Level	27dB (typical), 29dB (max)
Remote Control	Full size remote
Operating Temperature	41–104°F (5–40°C), 85% max humidity
Power Supply	AC input 100 - 240V, 50 - 60 Hz, auto-switching
Power Consumption	300W typical (Bright mode), 330W max (Bright mode), 210W typical (Eco+ mode), 230W max (Eco+ mode)
High Altitude	Operating temp @ sea level up to 10000 feet = 23F (max); must manually switch to high altitude mode @ 5000 feet & above (using OSD)

COMPATIBILITY SPECIFICATIONS


Computer Compatibility	FHD, HD, WXGA, UXGA, SXGA, XGA, SVGA, VGA, Mac
Video Input Compatibility	PAL (B, D, G, H, I, M, N, 576i/p), NTSC (M, 4.43/3.58 MHz, 480i/p), SECAM (B, D, G, K, K1, L) HD (1080i, 720p)
3D Compatibility†	Side-by-side: 1080i50 / 60, 720p50 / 60 Frame-pack: WUXGA24, 720p50 / 60 Over-under: WUXGA24, 720p50 / 60
Vertical Scan Rate	15 - 91kHz
Horizontal Scan Rate	25 - 85Hz (120Hz for 3D)
User Controls	Complete on-screen menu adjustment in 26 languages
I/O Connection Ports	2x HDMI, VGA-in, composite, audio-in, audio-out, USB power, RS-232C, RJ45
Loop Through (Audio)	Yes

PHYSICAL SPECIFICATIONS

Security	Security bar, Kensington lock, password protection
Weight	6.46 lbs.
Dimensions (W x H x D)	12.44" x 4.25" x 9.6"

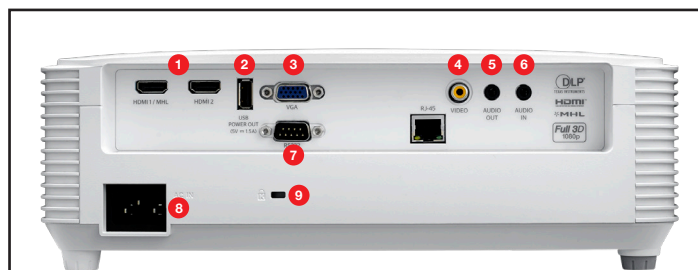

- 1. HDMI 1 & 2
- 2. USB Power Out
- 3. VGA
- 4. Video
- 5. Audio-Out
- 6. Audio-In
- 7. RS-232C
- 8. AC Power
- 9. Kensington™ Lock

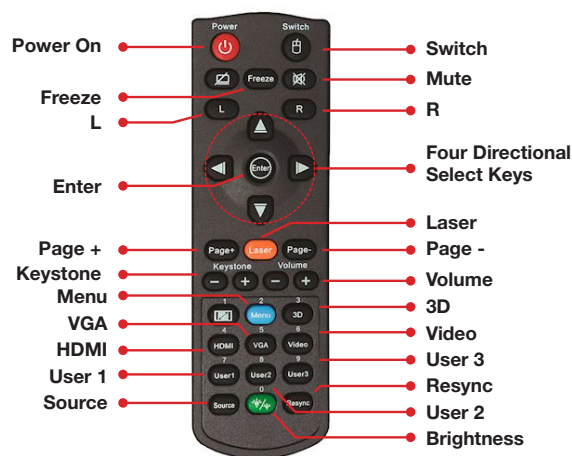

Warranty

1-Year parts and labor limited warranty on the projector, 90 days lamp warranty

What's in the Box

EH335 projector, AC power cord, remote control, batteries for remote, quick start card

Accessories

Lamp (replacement): BL-FP240G
Remote (replacement): BR5053C
Ceiling mount: BM-5001U
Wireless Mirroring: HDCast Pro-Black

UPC 796435 44 167 8

Optoma.com



*Light source life is dependent upon many factors, including brightness mode, display mode, usage, environmental conditions and more. Light source brightness can decrease over time.

†3D content can be viewed with DLP Link active shutter 3D glasses when projector is used with a compatible 3D player. Please visit Optoma.com for more information.

Copyright © 2020 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time. 12092020