

# MULTIMEDIA PROJECTOR EH505



## BRILLIANT PRESENTATIONS WITH MAXIMUM INSTALLATION FLEXIBILITY



**Bright crystal clear images for large venue applications**



**Unsurpassed color accuracy for the most impactful presentations**



**Vertical and horizontal lens shift for ease of installation**



**Optional lenses for maximum installation flexibility**



The Optoma EH505 was designed to deliver extraordinary performance and superior reliability to satisfy your large venue projector install needs. Its powerful 5000 lumens bright output combined with a remarkable 2,000:1 contrast ratio deliver amazingly bright, color-rich presentations with sharp, clear text and graphics. The Optoma EH505 features one the most comprehensive input panels and most advanced feature set its class to ensure the projector will satisfy your current and future needs. HDMI, display port and DVI for digital connectivity, 2 VGA inputs and one VGA out for analog content, vertical and horizontal lens shift, discrete audio inputs, 12 volt trigger for maximum installation convenience. Just a few of the many outstanding features on this remarkable product.

## LENS THROW OPTIONS

	Short Throw	Standard Throw	Long Throw
Optoma Part Number	BX-DL080	BX-DL200	BX-DL300
Throw Ratio (Distance/Width)	0.77:1	1.54–1.93:1	1.93–2.89:1
Projection Distance	1.6'–9.8' (0.5–3m)	4.9'–23.0' (1.5–7m)	6.6'–65.6' (2–20m)
Image Size (Diagonal)	28.0"–171" (0.71–4.34m)	34.2"–200" (0.87–5.08m)	30.6"–457" (0.78–11.6m)
Projection Lens	F=2.5, f=11.5 mm, Manual Focus	F=2.46-2.56, f=22.8-28.5 mm, 1.25x Manual Zoom and Focus	F=2.5-3.1, f=28.5-42.75 mm, 1.5x Manual Zoom and Focus
Weight w/ Projector	19.1 lb (8.6 kg)	18.9 lb (8.6 kg)	18.9 lb (8.6 kg)

## MULTIMEDIA PROJECTOR — EH505

### OPTICAL/TECHNICAL SPECIFICATIONS

<b>Display Technology</b>	Single 0.65" DarkChip3™ DLP® Technology by Texas Instruments™
<b>Native Resolution</b>	WUXGA (1920 x 1200)
<b>Maximum Resolution</b>	WUXGA (1920 x 1200)
<b>Brightness (Typical)</b>	5000 lumens
<b>Contrast Ratio</b>	2,000:1 (full on/full off)
<b>Displayable Colors</b>	1.07 Billion
<b>Lamp Life* and Type</b>	3500/1500 Hours (STD/bright) 370W P-VIP
<b>Projection Method</b>	Front, rear, ceiling mount, table top
<b>Keystone Correction</b>	±15° Vertical
<b>Uniformity</b>	85%
<b>Aspect Ratio</b>	16:10 Native, 4:3 and 16:9 compatible
<b>Lens Shift</b>	Vertical -30% to +50% image height Horizontal ±10% image width
<b>Audio</b>	Two 3-Watt speakers
<b>Noise Level (STD)</b>	37dB
<b>Remote Control</b>	Fully-featured IR remote with the option to hardwire to the projector
<b>Operating Temperature</b>	41–113°F (5–45°C), 85% max humidity, adjustable fan speed for high altitude application
<b>Power Supply</b>	AC Input 100–240V, 50–60Hz, auto-switching
<b>Power Consumption</b>	480W max (bright), 330W (STD), <0.5 Watt (standby)

### COMPATIBILITY SPECIFICATIONS


<b>Computer Compatibility</b>	WUXGA, UXGA, SXGA+, WXGA, SXGA, XGA, SVGA, VGA resized, VESA, PC and Macintosh compatible
<b>Video Compatibility</b>	NTSC, PAL, SECAM, SDTV (480i/576i), EDTV (480p/576p, HDTV (720p, 1080i/p)
<b>3D Compatibility<sup>†</sup></b>	Supports all HDMI 1.4a mandatory 3D format, side-by-side format and top and bottom format. 3D glasses are needed and sold separately.
<b>Vertical Scan Rate</b>	24–85kHz, 120Hz, 144Hz
<b>Horizontal Scan Rate</b>	15–91kHz
<b>User Controls</b>	Complete on-screen menu adjustments in 26 languages
<b>I/O Connection Ports</b>	Display port, HDMI, DVI-D w/ HDCP, two VGA-in, VGA-out, S-video, composite video, component video, five BNC (RGBHV/YPbPr), two stereo mini jack audio-in, two RCA stereo audio-in, audio-out, 3D VESA port, wired remote, USB-A charging port, RS-232C, RJ45, and 12V trigger
<b>Monitor Loop Through</b>	<i>Monitor:</i> D-Sub 15 pin VGA output (functional in both normal and standby modes) <i>Audio:</i> VAO audio out, HDMI VAO audio out supported (VAO in normal mode, fixed in Standby)

### PHYSICAL SPECIFICATIONS

<b>Security</b>	Kensington® lock port, security bar and keypad lock
<b>Weight</b>	18.6 lb (8.4 kg) w/o lens
<b>Dimensions (W x D x H)</b>	16.9" x 7.1" x 13.4" (430 x 181 x 340 mm)

\*Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

<sup>†</sup>3D content can be viewed with either RF or DLP Link active shutter glasses when projector is used with a compatible 3D player. RF 3D glasses require the use of an RF 3D emitter and a projector with a 3D VESA Sync port. Please visit [www.OptomaUSA.com](http://www.OptomaUSA.com) for more information.

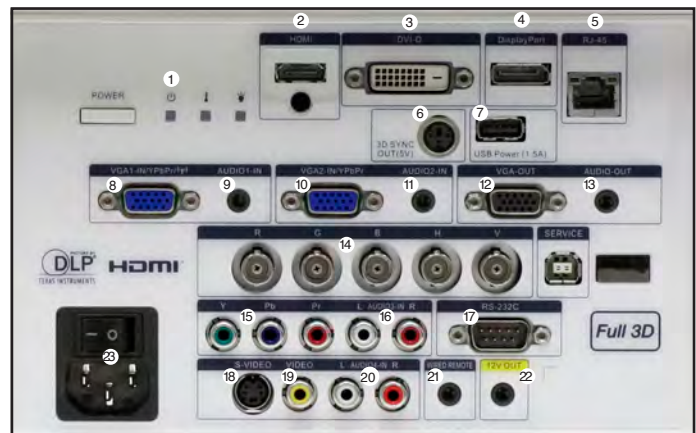

- |                        |                       |                     |
|------------------------|-----------------------|---------------------|
| 1. Power LED Indicator | 9. Audio-In (VGA-1)   | 17. RS-232C         |
| 2. HDMI                | 10. VGA 2-In          | 18. S-Video         |
| 3. DVI-D               | 11. Audio-In (VGA-2)  | 19. Composite Video |
| 4. Display Port        | 12. VGA-Out           | 20. RCA Audio-In    |
| 5. RJ45                | 13. Audio-Out         | 21. Wired Remote    |
| 6. 3D SYNC Out (5V)    | 14. BNC (RGBHV/YPbPr) | 22. 12V Trigger     |
| 7. USB Charging Port   | 15. Component         | 23. Power           |
| 8. VGA-In              | 16. RCA Audio-In      |                     |



#### Warranty

3-Year Optoma Express Service, 1-Year on Lamp

#### In the Box

AC power cord, VGA to VGA cable, remote control, batteries for remote, CD-ROM user's manual, quick start card and warranty card, lens is not included

#### Optional Accessories

Three optional lenses, wireless dongle, ceiling mount, HDMI cable, Optoma screens, RF 3D glasses, RF 3D emitter, DLP® Link™ 3D glasses

#### Accessory Part Numbers

Lamp: BL-FP370A	Mount: BM-5001U
Remote: BR-7003N	Wireless VGA Dongle: BI-EXTBG03
RF 3D glasses: BG-ZF2100GLS	RF 3D emitter: BG-BC100B
DLP® Link™ 3D glasses: BG-ZD301	

UPC 796435 41 831 1

[www.OptomaUSA.com](http://www.OptomaUSA.com)

**Optoma**  
Projector Expert

Copyright © 2013 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time. The Optoma Express Program is only valid in the U.S.