WPS PRO ROBUST SCREEN SHARING AND COLLABORATION



POWERFUL WIRELESS PRESENTATIONS





4-way split-screen allows 4 participants to share content simultaneously



Supports up to a maximum of 64 concurrent users for ultimate collaboration



Complete moderator control via the extensive web management interface



Screen Mirror with Windows PCs and Mac computers enables sharing of the presenter's desktop across screens



Share content using Windows PCs, Mac



Webslides feature enables remote viewing of the presentation session

The WPS Pro is a fullly-equipped presentation solution with a robust library of features that enables up to 64 participants to share content via 4-way split screen in a corporate or educational environment. WPS Pro connects to any HDMI or VGA-enabled Optoma Projector to deliver big, beautiful, and crisp presentations while the Conference Control function allows the moderator complete control of the presentation session.

Users can share PowerPoint Presentations, Word Documents, Excel Spreadsheets, videos and images directly from a SmartPhone or Tablet via the MirrorOp Presenter App for iOS and Android. WPS IPRO2 software enables Windows and Mac users to Mirror the Desktop to share any application including the web browser with session attendees.

In addition to sharing content, the moderator or any of the 4-way split screen participants can utilize the Annotations feature of the MirrorOp Presenter iOS and Android App. The Annotations feature allows the presenter and any of the 4-way split-screen participants to collaborate in real-time during the presentation session with the ability to write and draw using various colors and shapes.



TECHNOLOGY/FEATURES

CONNECTIVITY (May require optional accessories)



Computers














ROBUST SCREEN SHARING AND COLLABORATION - WPS PRO

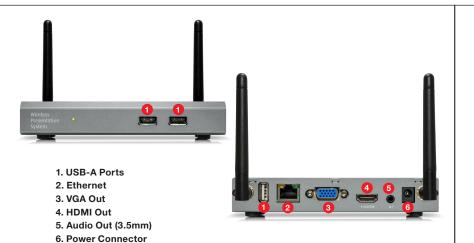



OPTICAL/TECHNICAL SPECIFICATIONS

OPTICAL/TECHNIC	CAL SPECIFICATIONS
Display Output	HDMI and VGA
Native Resolution	1920x1080 FullHD 1080p
Maximum Resolution	1920x1080 FullHD 1080p
Maximum Graphics Resolution	UXGA (1600x1200)
Wi-Fi (Client and Server)	802.11 b/g/n 2.4GHZ with Dual External Antenna, WEP/WPA/WPA2 Key Encryption, Gate Keeper Function, AP Client
Allow Internet Access	Yes, via RJ-45 or Wi-Fi (must connect to an EXISTING network)
DHCP Server and Static IP	Supports DHCP Server and the ability to setup WPS PRO as a Static Network Device
RJ-45	10/100M - Direct connection to LAN or WAN for participant connectivity and internet access through existing network
Concurrent Users	Maximum of 64 concurrent users for conference session
4-way split-screen/ Collaboration	4 participants can project/share content simultaneously
Moderator Function	Moderator Web Interface allows the Moderator complete control over the presentation session; Moderator can manage each participant independently which includes the ability to kick any participant; assign Moderator control to any of the 64 participants; Full control of 4-way split screen function
Remote Presentation Viewing	Webslides allows participants to remotely view PowerPoint Presentations, Word Docs, Excel Spreadsheets, and other static content such as images (videos are not supported)
Advanced Screen Capture	Full Resolution screen capture
Windows and Mac Application	Participants can download Windows and Mac WPS IPRO2 software directly from WPS PRO Web Interface
iOS and Android Apps	Mirror Op Presenter, Mirror Op Receiver, MirrorOP Sender for Samsung Galaxy
USB Plug and Show (Presentation/Media Player)	Share and view PowerPoint Presentations, Word Docs, Excel Spreadsheets, and other media content directly off a USB Drive
Webslides	Remote viewing of the presentation session; supports passcode protection
Audio Out	3.5mm analog audio output
Administrative Control Panel for Advanced Management	Configure DHCP or Static IPs, Webslides, Wi-Fi settings (includes SSID), FW Upgrade, System Reboot
Password and Passcode Management	User adjustable password for Admin and Moderator features; User adjustable passcode for Conference Session and Webslides Session
Customize Standby Screen	Change Standby Image to any image file: JPG format and the maximum file size is 5MB. Recommended image resolution is 1920X1080
USB Token Key	Allows attendees to immediately connect to a conference session without the need to download or install software or app
SNMP Manager	Manage WPS PRO devices across the corporate network through enhanced SNMP V2 protocol

PHYSICAL SPECIFICATIONS

Security	Kensington® lock, security bar and keypad lock
Weight	0.60lbs.
Dimensions (W x H x D)	5.87" x 1.00" x 2.40"

COMPATIBILITY SPECIFICATIONS

Display Compatibility	Any Optoma Projector with HDMI or VGA; any HDMI or VGA enabled display (projector, monitor, or HDTV)
HDTV Video Compatibility	NTSC, PAL, HDTV (720p, 1080i, and 1080p)
Graphics Compatibility	SVGA (800x600), XGA (1024x768), WXGA (1280x800 and 1280x768), WXGA+ (1440x900), UXGA (1600x1200)
3D Compatibility†	Supports all HDMI 1.4a mandatory 3D format, side-by-side format and top and bottom format. 3D glasses are needed and sold separately.
User Controls	Mouse and Keyboard via USB
I/O Connection Ports	1xHDMI, 1xVGA, 1xAudio-Out, 3xUSB

Warranty		
3 Year Warranty		
What's in the Box (Standard Accessories)		
WPS PRO, USB Token Key, Power Adapter, Mounting Hardware, 2 Wi-Fi Antenna		
Optional Accessories		
Wireless HDMI		
Accessory Part Numbers		
Wireless HDMI system: WHD200		
UPC 796435 09 113 2		

5V/2.6A

Power Source