

HD-SDI/SD-SDI Board for DLP™ Projector

ET-MD77SD3

This board is designed for use with the DLP™ projectors. It enables the input of a HD digital serial component signal (SMPTE292M-compliant). Remote control of the projector is also possible from an external computer connected via LAN.

NOTE: Please use the module only on the specified Panasonic DLP™ projector.

Specifications


Power supply:	Provided from the DLP™ projector
Power consumption:	Projector power consumption increases approximately 10 W
Terminals: Serial input:	BNC x 1 4:2:2 digital serial component signal: SMPTE 259M compliant, 480i, 576i HD digital serial component signal: SMPTE 292M compliant, 720/60p, 720/50p, 1035/60i, 1080/60i, 1080/50i, 1080/25p, 1080/24p, 1080/24sF, 1080/30p
Serial output:	BNC x 1, active through
LAN:	RJ-45 x 1, 10Base-T/100Base-TX for network connection
Dimensions (W x H x D):	204 x 32 x 214 mm (8-1/32" x 1-1/4" x 8-7/16")
Weight:	290 g (10.2 lbs.)
Operating temperature:	0°C – 40°C
Operating humidity:	10% – 80% (no condensation)

NOTE: Use connection cables of 5CFB or higher (ex. 5CFB, 7CFB, 5CFTX, etc.). 720/50p signals can be input only when this unit is used with the PT-DW10000, PT-D10000, PT-DW7000 or PT-D7700.

Weights and dimensions shown are approximate. Specifications subject to change without notice. DLP and DLP logo are trademarks of Texas Instruments.

Dimensions

unit: mm

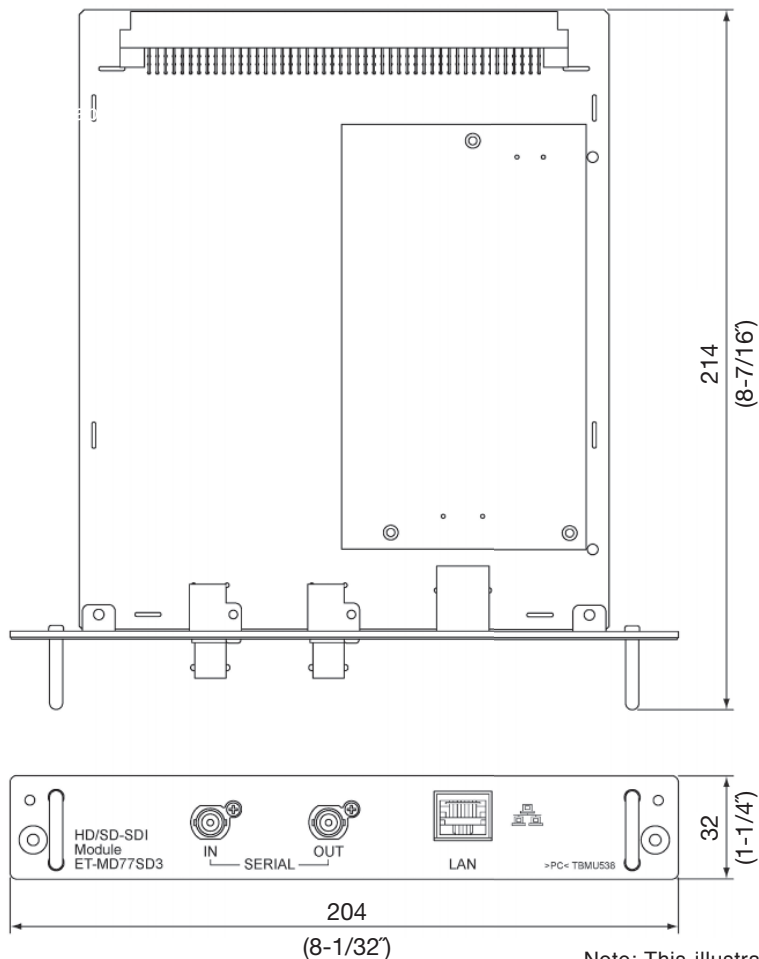

Note: This illustration is not drawn to scale.