


## Data Projector VPL-EX255

### Key Features


- 3,300 lumens
- Native XGA (1,024x768) resolution
- High contrast ratio
- Bright Era™ Panel
- Flexible 1.6x manual zoom standard lens
- Long-lasting lamp
- Recommended lamp replacement time 10000h (low mode)
- Synchronized lamp and filter maintenance cycle
- Energy efficient design
  - Auto power saving mode
  - Blank with lamp dimming
  - 4 lamp mode (High, Std, Low, Auto\*)
  - \*Auto lamp control by picture brightness
  - ECO MODE key
- Convenient terminals including HDMI, RS-232C and RJ-45
- 16W Speaker
- USB display
- USB media viewer
- PC Wireless capability (option)
- Tablet Device & Smart Phone connection (wireless)

### Dimensions (Front)


Unit: mm (inches)

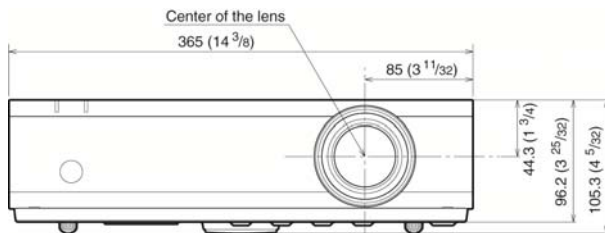

### Dimensions (Bottom)

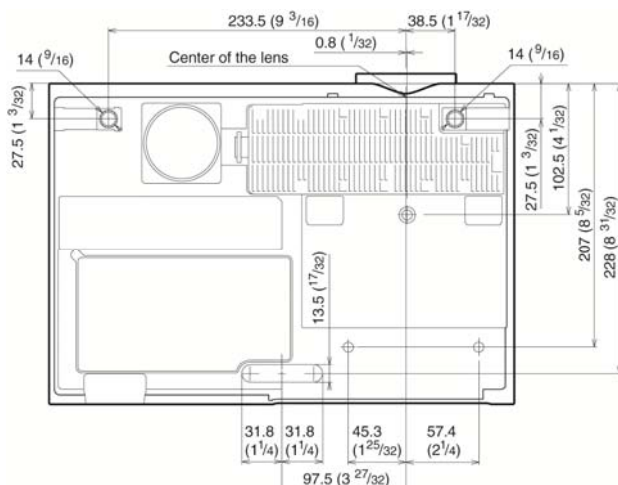

### Connector Panels

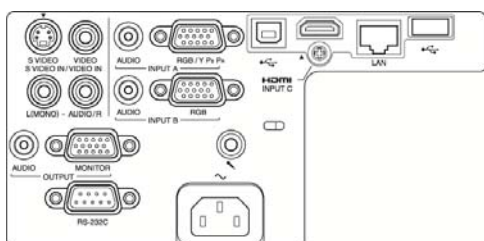

Optical		
Light Output / Color Light Output		3300 lumens (Lamp mode: High) 2200 lumens (Lamp mode: Standard) 1700 lumens (Lamp mode: Low)
LCD Panels		0.63"x3 BrightEra LCD Panel
Panel Display Resolution		XGA (1024x768 dots)
Contrast Ratio		3,300:1 (Full white/full black)* <sup>1</sup>
Light Source		Ultra high-pressure mercury lamp 210 W type
Recommended Lamp Replacement Time* <sup>2</sup>		3000H (Lamp mode: High) 5000H (Lamp mode: Standard) 10000H (Lamp mode: Low)
Filter Cleaning Cycle* <sup>2</sup>		Max. 7000H
Projection Lens	Zoom / Focus	Approx. 1.6x Manual Zoom / Manual Focus
	Throw Ratio	1.40:1 to 2.27:1
Screen Size		30" to 300"
Interface		
Computer and Video Input/Output	INPUT A	Mini D-sub 15-pin (RGB/Y Pb Pr) Audio: Stereo mini jack
	INPUT B	Mini D-sub 15-pin (RGB) Audio: Stereo mini jack
	INPUT C	HDMI (Digital RGB/Y Pb Pr, Digital Audio) (HDCP support)
	VIDEO IN	Pin Jack Audio : Pin jack (x2) (shared with S VIDEO IN)
	S VIDEO IN	Mini DIN 4-pin Audio : Pin jack (x2) (shared with VIDEO IN)
	Monitor OUT	Mini D-sub 15-pin (from INPUT A and INPUT B)
	Audio OUT	Stereo mini jack (variable out)* <sup>3</sup>
Other Signal Input/Output	RS-232C	D-sub 9-pin (male)
	LAN	RJ-45, 10BASE-T/100BASE-TX
	USB	Type-A, Type-B
	Microphone input	Mini jack
General		
Speaker		16W (mono)
Scanning Frequency		H: 14 to 93 kHz, V: 47to 93 Hz
Display Resolution	Computer Signal Input	Maximum display resolution : UXGA 1600x1200 dots
	Video Signal Input	Video (Composite), 15k (480/60i, 576/50i), DTV (480/60p, 576/50p, 720/60p, 720/50p, 1080/60i, 1080/50i, 1080/60p, 1080/50p)
Color System		NTSC3.58, PAL, SECAM, NTSC4.43, PAL-M, PAL-N
UPC Code		0 27242 88178 5
EAN / JAN Code		49 05524 98338 8
Power Requirements		AC 100 V to 240 V, 3.2 A to 1.4 A, 50 Hz/60 Hz
Power Consumption		314 W (AC 100 V-120 V) 301 W (AC 220 V-240 V)
Standby Mode Power Consumption		4.9 W (Std) / 0.5 W (Low) (AC 100V-120 V) 5.1 W (Std) / 0.5 W (Low) (AC 220V-240 V)
Dimensions (WxHxD) (without protrusion)		365 x 96.2 x 252 mm 14 3/8 x3 25/32 x9 29/32 "
Mass		4 kg /8 lb
Optional Accessories		
Replacement Lamp		LMP-E212
USB wireless LAN module		IFU-WLM3
Service Parts		
Replacement Filter		4-426-702-01 (FILTER ) (Filters are cleanable)
Replacement Remote		1-490-463-11 (RM-PJ8)

\*<sup>1</sup> The value is average.

\*<sup>2</sup> The figures are expected maintenance time and not guaranteed.  
They will depend on the environment or how the projector is used.

\*<sup>3</sup> Works as an audio switcher function. Output from a selected channel, not available in standby.