

G100



Installation manual

Barco NV
Beneluxpark 21, 8500 Kortrijk, Belgium
www.barco.com

Manufacturer: Barco NV
President Kennedypark 35, 8500 Kortrijk, Belgium

Copyright ©

All rights reserved. No part of this document may be copied, reproduced or translated. It shall not otherwise be recorded, transmitted or stored in a retrieval system without the prior written consent of Barco.

Changes

Barco provides this manual 'as is' without warranty of any kind, either expressed or implied, including but not limited to the implied warranties or merchantability and fitness for a particular purpose. Barco may make improvements and/or changes to the product(s) and/or the program(s) described in this publication at any time without notice.

This publication could contain technical inaccuracies or typographical errors. Changes are periodically made to the information in this publication; these changes are incorporated in new editions of this publication.

The latest edition of Barco manuals can be downloaded from the Barco website <https://www.barco.com>.

Trademarks

Brand and product names mentioned in this manual may be trademarks, registered trademarks or copyrights of their respective holders. All brand and product names mentioned in this manual serve as comments or examples and are not to be understood as advertising for the products or their manufacturers.

Guarantee and Compensation

Barco provides a guarantee relating to perfect manufacturing as part of the legally stipulated terms of guarantee. On receipt, the purchaser must immediately inspect all delivered goods for damage incurred during transport, as well as for material and manufacturing faults. Barco must be informed immediately in writing of any complaints.

The period of guarantee begins on the date of transfer of risks, in the case of special systems and software on the date of commissioning, at latest 30 days after the transfer of risks. In the event of justified notice of complaint, Barco can repair the fault or provide a replacement at its own discretion within an appropriate period. If this measure proves to be impossible or unsuccessful, the purchaser can demand a reduction in the purchase price or cancellation of the contract. All other claims, in particular those relating to compensation for direct or indirect damage, and also damage attributed to the operation of software as well as to other services provided by Barco, being a component of the system or independent service, will be deemed invalid provided the damage is not proven to be attributed to the absence of properties guaranteed in writing or due to the intent or gross negligence or part of Barco.

If the purchaser or a third party carries out modifications or repairs on goods delivered by Barco, or if the goods are handled incorrectly, in particular if the systems are operated incorrectly or if, after the transfer of risks, the goods are subject to influences not agreed upon in the contract, all guarantee claims of the purchaser will be rendered invalid. Not included in the guarantee coverage are system failures which are attributed to programs or special electronic circuitry provided by the purchaser, e.g. interfaces. Normal wear as well as normal maintenance are not subject to the guarantee provided by Barco either.

The environmental conditions as well as the servicing and maintenance regulations specified in this manual must be complied with by the customer.

Table of contents

1	Safety	7
1.1	General considerations	8
1.2	Important safety instructions	10
1.3	Product safety labels	14
1.4	High Brightness precautions: Hazard Distance	16
1.5	HD for fully enclosed projection systems	18
1.6	HD in function of modifying optics	19
1.7	HD calculation of multi-projector stacks	20
1.8	Compliance	21
1.9	Download Product Manual	22
2	Prepare to install	23
2.1	Installation requirements	24
2.2	Initial inspection	26
2.3	Getting to know the projector	27
2.4	Input/Output (I/O) Panel	30
2.5	Control panel	31
2.6	Overview of the RCU	32
2.7	Adjusting the projector's position	33
2.8	Lens selection	34
2.9	Lenses	35
2.10	Adjusting the image position on the screen	39
2.11	Download Projector Toolset	41
3	Installation procedures	43
3.1	RCU battery installation	44
3.2	Connecting the projector with the power net	45
3.3	Installing the lens	46
3.4	Lens safety cable installation	47
3.5	Boresight (Scheimpflug) adjustment	48
3.6	Projector Address (ID)	51
3.7	Using the RCU	52
3.8	Software update	53
3.9	Creating a backup	55
3.10	Restoring a backup	57

4	Powering on/off the projector	59
4.1	Powering on the projector	60
4.2	Powering off the projector	62
5	FLDX lens (0.38 : 1) UST 90°	63
5.1	About the UST lens	64
5.2	Parts indication	66
5.3	Adapting the lens for the projecting position	67
5.4	Mounting the lens adapter	69
5.5	When mounting the lens without the support	71
5.6	Mounting the UST lens	72
5.7	Lens adjustment	76
A	Dimensional drawings	79
A.1	Dimensions of the projector	80
A.2	Ceiling mount information	81
	Index	83

Safety

1

1.1	General considerations	8
1.2	Important safety instructions	10
1.3	Product safety labels.....	14
1.4	High Brightness precautions: Hazard Distance.....	16
1.5	HD for fully enclosed projection systems.....	18
1.6	HD in function of modifying optics	19
1.7	HD calculation of multi-projector stacks	20
1.8	Compliance.....	21
1.9	Download Product Manual	22

About this document

Read this document attentively. It contains important information to prevent personal injury while installing and using the G100 product. Furthermore, it includes several cautions to prevent damage to the unit. Ensure that all safety guidelines, safety instructions and warnings mentioned in this chapter are understood and followed before installing the G100 product.

Clarification of the term “G100” used in this document

When referring in this document to the term “G100” means that the content is applicable for following Barco products:

- G100-W16, G100-W19, G100-W22, G100-W25

Model certification name

- G100-W16, G100-W19, G100-W22, G100-W25



Barco provides a guarantee relating to perfect manufacturing as part of the legally stipulated terms of guarantee. Observing the specification mentioned in this chapter is critical for optimal performance. Neglecting this can result in loss of warranty.

1.1 General considerations



WARNING: Be aware of suspended loads.



WARNING: When suspending loads, wear a hard hat to reduce the risk of personal injury.



WARNING: Be careful while working with heavy loads.



WARNING: Mind your fingers while working with heavy loads.



WARNING: In case of emergency, disconnect the device from the mains power supply. In case the power input at the projector side is not accessible, a readily accessible general disconnect device shall be incorporated.

General safety instructions

- Before operating this equipment please read this manual thoroughly and retain it for future reference.
- All warnings on the unit and in its documentation manuals must be adhered to.
- Installation and preliminary adjustments must be performed by qualified Barco personnel or by authorized Barco service dealers.
- This product contains no user serviceable parts. Attempts to modify/replace mechanics or electronics inside the housing or compartments will violate any warranties and may be hazardous.
- All instructions for operating and use of this equipment must be followed precisely.
- All local installation codes must be adhered to.

Notice on safety

This equipment is built in accordance with the requirements of the applicable international safety standards. These safety standards impose important requirements on the use of safety critical components, materials and insulation, in order to protect the user or operator against risk of electric shock and energy hazard and having access to live parts. Safety standards also impose limits to the internal and external temperature rises, radiation levels, mechanical stability and strength, enclosure construction and protection against the risk of fire. Simulated single fault condition testing ensures the safety of the equipment to the user even when the equipment's normal operation fails.

Notice on optical radiation

This projector embeds a light source incorporating high brightness lasers. The laser light is processed through the projector's optical path. Native laser light is not accessible by the end user in any use case. The light exiting the projection lens has been diffused within the optical path, representing a larger source and lower brightness than native laser light. Nevertheless the projected light can represent a significant risk for the human eye and skin when exposed directly within the beam. This risk is not specifically related to the characteristics of laser light but solely to the high thermal induced energy of the light source, which is equivalent with lamp based systems. Thermal eye injury is possible when exposed within the Hazard Distance (HD). The HD is defined from the projection lens surface towards the position of the projected beam where the intensity equals the applicable exposure limit as described in the chapter "Hazard Distance".

This projector is classified as a laser product under IEC 60825-1: 2014, EN 60825-1:2014+A11:2021. The projector, in particular the projection beam, is classified as a Risk Group (RG) under IEC EN 62471-5:2015.



WARNING: This projector has a built-in Class 4 laser module. Never attempt to disassemble or modify the laser module. Service only allowed by qualified service personnel.



WARNING: No direct exposure to the projection beam within the hazard distance shall be permitted for RG3 (Risk Group 3) IEC EN 62471-5:2015. Do not stare into the beam for RG2 (Risk Group 2) IEC EN 62471-5:2015.



CAUTION: Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Optical radiation safety precautions

This product is classified as CLASS 1 LASER PRODUCT - RISK GROUP 2 of IEC 60825-1 : 2014 and also complies with 21 CFR 1040.10 and 1040.11 except for conformance as a Risk Group 2 LIP as defined in IEC 62471-5:Ed. 1.0. For more information, see Laser Notice No. 57, dated May 8, 2019.

When installed with G LENS (2.0 - 4.0 : 1), G LENS (4.0-7.2 : 1) and G LENS (7.0 - 10.8 : 1) lens (throw ratio greater than 2.0), this projector may become Class 1 Laser Product-Risk Group 3 (RG3) according to IEC 60825-1:2014, IEC 62471-5: 2015, and also make a variance approvals under 21 CFR 1010.4 for RG3 LIP according to Classification and Requirements for Laser Illuminated Projectors (LIPs) (Laser Notice No. 57).

To ensure safety operation, read all laser safety precautions before installing and operating the projector.

- This projector uses extremely high brightness laser. Do not stare into the direct light beam, as the extremely high brightness may cause permanent eye damage. (Risk Group 2 of IEC 62471-5:2015).
- No direct exposure to the beam shall be permitted. (Risk Group 3 of IEC 62471-5:2015).
- This product is not for household use.
- Possibly hazardous optical radiation emitted from this product.
- This projector has a built-in Class 4 laser module. Never attempt to disassemble or modify the laser module.
- Any operation or adjustment not specifically instructed in the User manual creates the risk of hazardous laser radiation exposure.
- Do not stare into beam when the projector is on. When turning on the projector, make sure no one within projection range is looking into the lens.
- Follow the control, adjustment, or operation procedures to avoid damage or injury from exposure of laser radiation.
- The instructions for the assembly, operation, and maintenance include clear warnings concerning precautions to avoid possible exposure to hazardous laser radiation.
- Additional RG2 warning against eye exposure for close exposures less than 1m. WARNING: MOUNT ABOVE THE HEADS OF CHILDREN.

Users definition

These projectors are intended "FOR PROFESSIONAL USE ONLY", this means installation can only be carried out by trained and authorized persons.

Throughout this manual, the terms SERVICE PERSONNEL, INSTALLER refers to persons having appropriate technical training and experience necessary to be knowledgeable of potential hazards to which they are exposed (including, but not limited to HIGH VOLTAGE ELECTRIC and ELECTRONIC CIRCUITRY, HIGH TEMPERATURES and HIGH BRIGHTNESS SOURCES) in performing a task, and of measures to minimize the potential risks to themselves or other persons.

The term USER or OPERATOR of RG2 projectors refers to any other person than SERVICE PERSONNEL or INSTALLER. The term USER or OPERATOR of RG3 projectors refers to any person trained and authorized to operate professional RG3 projectors. The USER or OPERATOR may only perform the maintenance tasks set forth in the user manual or the maintenance tasks for which they are trained and authorized. All other maintenance tasks and service tasks must be performed by qualified SERVICE PERSONNEL.

1.2 Important safety instructions

To prevent the risk of electrical shock

- This product should be operated from a mono phase AC power source.
- This apparatus must be grounded (earthed) via the supplied 3 conductor AC power cable. If none of the supplied power cables are the correct one, consult your dealer. If you are unable to insert the plug into the outlet, contact your electrician to replace your obsolete outlet. Do not defeat the purpose of the grounding-type plug.
- Do not allow anything to rest on the power cord. Do not locate this product where persons will walk on the cord. To disconnect the cord, pull it out by the plug. Never pull the cord itself.
- Use only the power cord supplied with your device. While appearing to be similar, other power cords have not been safety tested at the factory and may not be used to power the device. For a replacement power cord, contact your dealer.
- Do not operate the projector with a damaged cord. Replace the cord.
- Do not operate the projector if the projector has been dropped or damaged until it has been examined and approved for operation by a qualified service technician. Position the cord so that it will not be tripped over, pulled, or contact hot surfaces.
- If an extension cord is necessary, a cord with a current rating at least equal to that of the projector should be used. A cord rated for less amperage than the projector may overheat.
- Never push objects of any kind into this product through cabinet slots as they may touch dangerous voltage points or short out parts that could result in a risk of fire or electrical shock.
- Do not expose this projector to rain or moisture.
- Do not immerse or expose this projector in water or other liquids.
- Do not spill liquid of any kind on this projector.
- Should any liquid or solid object fall into the cabinet, unplug the set and have it checked by qualified service personnel before resuming operations.
- Do not disassemble this projector, always take it to an authorized trained service person when service or repair work is required.
- Do not use an accessory attachment which is not recommended by the manufacturer.
- Lightning - For added protection for this video product during a lightning storm, or when it is left unattended and unused for long periods of time, unplug it from the wall outlet. This will prevent damage to the device due to lightning and AC power-line surges.

To prevent personal injury

- To prevent injury and physical damage, always read this manual and all labels on the system before connecting to the wall outlet or adjusting the projector.
- To prevent injury, take note of the weight of the projector.
- To prevent injury, ensure that the lens and all covers are correctly installed. See installation procedures.
- Warning: high intensity light beam. NEVER look into the lens! High luminance could result in damage to the eye.
- Warning: extremely high brightness laser: This projector uses extremely high brightness laser. Never attempt to look directly into the lens or at the laser.
- The power input at the projector side is considered as the disconnect device. When required to switch off the projector, to access parts inside, always disconnect the power cord at the projector side. In case the power input at the projector side is not accessible (e.g. ceiling mount), the socket outlet supplying the projector shall be installed nearby the projector and be easily accessible, or a readily accessible general disconnect device shall be incorporated in the fixed wiring.
- Do not place this equipment on an unstable cart, stand, or table. The product may fall, causing serious damage to it and possible injury to the user.
- High brightness warning: The projector light source must be switched off when no projection lens is installed. It is hazardous to operate without lens or shield. Always switch the output light off when replacing a lens. Lenses or shields shall be changed if they have become visibly damaged to such extent that their effectiveness is impaired. For example by cracks or deep scratches.
- When installing an interchangeable lens with a throw ratio that makes the projector become an RG3 unit, (See chapter "Available lenses" in the installation manual), refer to chapter ["HD in function of modifying optics"](#), page 19, for information regarding precautions.
- FOR PROFESSIONAL USE ONLY means installation can only be carried out by Barco AUTHORIZED PERSONNEL familiar with potential hazards associated with high intensity light beams.

- **Warning: High brightness projector:** This projector embeds high brightness (radiance) lasers; this laser light is processed through the projectors optical path. Native laser light is not accessible by the end user in any use case. The light exiting the projection lens has been diffused within the optical path, representing a larger source and lower radiance value than native laser light. Nevertheless, when RG3, the projected light represents a significant risk for the human eye when exposed directly within the beam. This risk is not specific related to the characteristics of laser light but solely to the high thermal induced energy of the light source; which is comparable with lamp based systems. When RG3, thermal retinal eye injury is possible when exposed within the Hazard Distance. The Hazard Distance (HD) is defined from the projection lens surface towards the position of the projected beam where the irradiance equals the maximum permissible exposure as described in the chapter [“High Brightness precautions: Hazard Distance”, page 16](#).
- Always switch off the projector and disconnect from the mains power supply before attempting to remove any of the projector covers or access parts inside the projector.
- This product contains no user serviceable parts. Attempts to modify/replace mechanics or electronics inside the housing or compartments will violate any warranties and may be hazardous.
- For correct physical installation, refer to the Installation manual.
- Only place the projector on a stable surface or mount it securely using an approved ceiling-mount.
- Exposure to UV radiation: Some medications are known to make individuals extra sensitive to UV radiation. The American Conference of Governmental Industrial Hygienists (ACGIH) recommends occupational UV exposure for an 8 hour day to be less than 0,1 micro-watts per square centimeters of effective UV radiation. An evaluation of the workplace is advised to assure employees are not exposed to cumulative radiation levels exceeding these government guidelines. The exposure of this UV radiation is allowed for only 1 hour per day for maintenance and service persons.

To prevent fire hazard

- Do not place flammable or combustible materials near the projector!
- Barco large screen projection products are designed and manufactured to meet the most stringent safety regulations. This projector radiates heat on its external surfaces and from ventilation ducts during normal operation, which is both normal and safe. Exposing flammable or combustible materials into close proximity of this projector could result in the spontaneous ignition of that material, resulting in a fire. For this reason, it is absolutely necessary to leave an “exclusion zone” around all external surfaces of the projector whereby no flammable or combustible materials are present. The exclusion zone on the lens side must be at least 500 cm (197”). The exclusion zone on all other projector sides must be not less than 100 cm (39,4”).
- Do not cover the projector or the lens with any material while the projector is in operation.
- Keep flammable and combustible materials away from the projector at all times.
- Mount the projector in a well-ventilated area away from sources of ignition and out of direct sun light.
- Never expose the projector to rain or moisture. In the event of fire, use sand, CO₂ or dry powder fire extinguishers. Never use water on an electrical fire.
- Always have service performed on this projector by qualified service personnel. Always insist on genuine Barco replacement parts. Never use non- Barco replacement parts as they may degrade the safety of this projector.
- Slots and openings in this equipment are provided for ventilation. To ensure reliable operation of the projector and to protect it from overheating, these openings must not be blocked or covered. The openings should never be blocked by placing the projector too close to walls, or other similar surface. This projector should never be placed near or over a radiator or heat register. This projector should not be placed in a built-in installation or enclosure unless proper ventilation is provided.
- Projection rooms must be well ventilated or cooled in order to avoid build up of heat.
- Let the projector cool down completely before storing. Remove cord from the projector when storing.

To prevent battery explosion

- Danger of explosion if battery is incorrectly installed.
- Replace only with the same or equivalent type recommended by the manufacturer.
- For disposal of used batteries, always consult federal, state, local and provincial hazardous waste disposal rules and regulations to ensure proper disposal.

To prevent projector damage

- Always remove lens cap before switching on the projector. If the lens cap is not removed, it may melt due to the high energy light emitted through the lens. Melting the lens cap may permanently damage the surface of the projection lens.

- Cleaning the booth area would be monthly minimum. Neglecting this could result in disrupting the air flow inside the projector, causing overheating. Overheating may lead to the projector shutting down during operation.
- The projector must always be installed in a manner which ensures free flow of air into its air inlets and unimpeded evacuation of the hot air from its cooling system.
- If more than one projector is installed in a common projection booth, the exhaust air flow requirements are valid for EACH individual projector system. Note that inadequate air extraction or cooling will result in decreased life expectancy of the projector as a whole as well as causing premature failure of the lasers.
- In order to ensure that correct airflow is maintained, and that the projector complies with Electromagnetic Compatibility (EMC) requirements, it should always be operated with all of its covers in place.
- Slots and openings in the cabinet are provided for ventilation. To ensure reliable operation of the product and to protect it from overheating, these openings must not be blocked or covered. The openings should never be blocked by placing the product on a bed, sofa, rug, or other similar surface. This product should never be placed near or over a radiator or heat register. The device should not be placed in a built-in installation or enclosure unless proper ventilation is provided.
- Ensure that nothing can be spilled on, or dropped inside the projector. If this does happen, switch off and unplug the mains supply immediately. Do not operate the projector again until it has been checked by qualified service personnel.
- Do not block the projector cooling fans or free air movement around the projector.
- Do not use this equipment near water.
- Only connect the projector to signal sources and voltages as described in the technical specification. Connecting to unspecified signal sources or voltages may lead to malfunction and permanent damage of the unit.
- Special care for Laser Beams: Special care should be used when DLP projectors are used in the same room as high power laser equipment. Direct or indirect hitting of a laser beam on to the lens can severely damage the Digital Mirror Devices™ in which case there is a loss of warranty.
- Never place the projector in direct sun light. Sun light on the lens can severely damage the Digital Mirror Devices™ in which case there is a loss of warranty.
- Save the original shipping carton and packing material. They will come in handy if you ever have to ship your equipment. For maximum protection, repack your set as it was originally packed at the factory.
- Unplug this product from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning. Never use strong solvents, such as thinner or benzene, or abrasive cleaners, since these will damage the cabinet. Stubborn stains may be removed with a cloth lightly dampened with mild detergent solution.
- To ensure the highest optical performance and resolution, the projection lenses are specially treated with an anti-reflective coating, therefore, avoid touching the lens. To remove dust on the lens, use a soft dry cloth. Do not use a damp cloth, detergent solution, or thinner.
- Rated operating ambient temperature: $t_a = 5\text{ }^{\circ}\text{C}$ (41 $^{\circ}\text{F}$) to 50 $^{\circ}\text{C}$ (122 $^{\circ}\text{F}$).
- Rated operating humidity: 10% RH to 85% RH (non-condensing).
- Do not operate the projector outside its temperature and humidity specifications as this may result in overheating and malfunction.
- Do not operate the projector in environments with excessive dust. The projector must be installed in environments where the dust conditions are as low as expected in a standard office environment. The environment should be clean and free from hostile airborne particles which may have harmful effects on the internal parts of the projector (e.g., airborne contaminants produced by smoke or snow machines, contaminants derived from chemical products such as e.g., disinfectants, conducting types of dust, excessive dust).
- If the specified environmental conditions cannot be guaranteed (e.g., construction works), the projector must be removed, or switched off and fully protected until the requirements are fulfilled.
- Contact Barco in case uncertainty exist on the environmental conditions linked to air contamination prior to install and operate the projector.
- Sufficient free space around the projector is critical for proper air circulation and cooling of the unit. The dimensions shown in [Image 1–1](#) indicate the minimum space required.
- For ceiling mounted installations, make sure to leave a minimum space as shown in [Image 1–1](#) between the ceiling mount and the bottom intake vents of the projector.

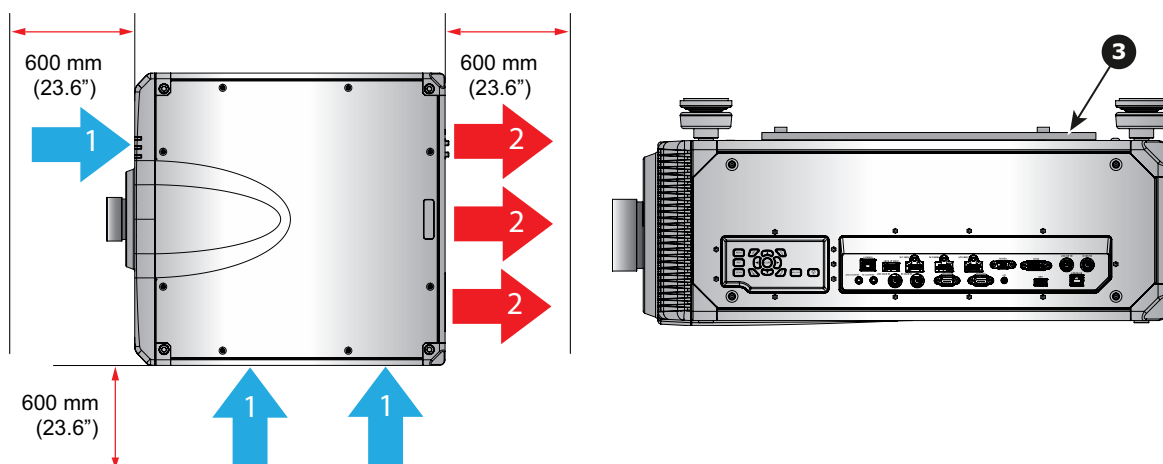


Image 1–1

- 1** Air Inlet.
- 2** Air outlet.
- 3** Ceiling mount plate.

On servicing

- Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous voltage potentials and risk of electric shock.
- Refer all servicing to qualified service personnel.
- Attempts to alter the factory-set internal controls or to change other control settings not specially discussed in this manual can lead to permanent damage to the unit and cancellation of the warranty.
- Replacement parts: When replacement parts are required, be sure the service technician has used original Barco replacement parts or authorized replacement parts which have the same characteristics as the Barco original part. Unauthorized substitutions may result in degraded performance and reliability, fire, electric shock or other hazards. Unauthorized substitutions may void warranty.
- Safety check: Upon completion of any service or repairs to this unit, ask the service technician to perform safety checks to determine that the product is in proper operating condition.

Malfunction unit

Remove all power from the product and refer servicing to qualified service technicians under the following conditions:

- When the power cord or plug is damaged or frayed.
- If liquid has been spilled into the equipment.
- If the product has been exposed to rain or water.
- If the product does not operate normally when the operating instructions are followed. Adjust only those controls that are covered by the operating instructions since improper adjustment of the other controls may result in damage and will often require extensive work by a qualified technician to restore the product to normal operation.
- If the product has been dropped or the cabinet has been damaged.
- If the product exhibits a distinct change in performance, indicating a need for service.


Safety Data Sheets for Hazardous Chemicals

For safe handling information on chemical products, consult the Safety Data Sheet (SDS). SDSs are available upon request via safetydatasheets@barco.com.

1.3 Product safety labels


Light beam related safety labels (G100-W16, G100-W19 and G100-W25)

Safety labels explanation:



“WARNING: MOUNT ABOVE THE HEADS OF CHILDREN.”

Additional warning against eye exposure for close exposures less than 1 m.



FDA Variance Number (USA only).

This product complies with performance standards for laser products under 21 CFR Part 1040 except with respect to those characteristics authorized by Variance Number [see applied label] effective [see applied label]



This product is classified as Class 1 Laser Product-Risk Group 2 of IEC 60825-1:2014 and also complies with 21 CFR 1040.10 and 1040.11 as a Risk Group 2, LIP (Laser Illuminated Projector) as defined in IEC 62471-5:Ed.1.0.

For more information, see Laser Notice No. 57, dated May 8, 2019.



This projector may become Risk Group 3 product when an interchangeable lens with throw ratio greater than 2.0 (G lens - Ultra Long Zoom) is installed.

Refer to the manual for the lens list and hazard distance before operation. Such combinations of projector and lens are intended for professional use only, and are not intended for consumer use.

Not for household use.

No direct exposure to beam shall be permitted, which can cause injury to the retina in the back of the eye.

Light beam related safety labels (G100-W25)

Safety labels explanation:



Do not look into the beam less than 1m. No direct eye exposure to the beam is permitted.

BARCO INC
3059 Premiere Parkway Suite 400, Duluth, GA 30097, USA
This product complies with performance standards for laser products under 21 CFR Part 1040 except with respect to those characteristics authorized by Variance Number XXXX-X-XXXX effective [insert the date of the variance approval]
U.S.A. Only

FDA laser variance (US projectors only)



No direct exposure to the beam shall be permitted, RG3 IEC 62471- 5:2015

This projector has been classified as Class 1 Laser Product-Risk Group 3 according to the IEC 60825-1:2014 and IEC 62471- 5:2015 standard.

Operators shall control access to the beam within the hazard distance or install the product at the height that will prevent exposures of spectators' eyes within the hazard distance

1.4 High Brightness precautions: Hazard Distance



HD

Hazard Distance (HD) is the distance measured from the projection lens at which the intensity or the energy per surface unit becomes lower than the applicable exposure limit on the eye or on the skin. The light beam is considered (to be) unsafe for exposure if the distance from a person to the light source is less than the HD.

Restriction Zone (RZ) based on the HD

The HD depends on the amount of lumens produced by the projector and the type of lens installed. See chapter “HD in function of modifying optics”, page 19.

To protect untrained end users (as venue visitors, spectators) the installation shall comply with the following installation requirements: Operators shall control access to the beam within the hazard distance or install the product at a height that will prevent spectators' eyes from being in the hazard distance. Radiation levels in excess of the limits will not be permitted at any point less than 2.0 meter (SH) above any surface upon which persons other than operators, performers, or employees are permitted to stand or less than 1.0 meter (SW) lateral separation from any place where such persons are permitted to be. In environments where unrestrained behavior is reasonably foreseeable, the minimum separation height should be greater than or equal to 3.0 meter to prevent potential exposure, for example by an individual sitting on another individual's shoulders, within the HD.

These values are minimum values and are based on the guidance provided in IEC 62471-5:2015 section 6.6.3.5.

The installer and user must understand the risk and apply protective measures based upon the hazard distance as indicated on the label and in the user information. Installation method, separation height, barriers, detection system or other applicable control measure shall prevent hazardous eye access to the radiation within the hazard distance.

For example, projectors that have a HD greater than 1 m and emit light into an uncontrolled area where persons may be present should be positioned in accordance with “the fixed projector installation” parameters, resulting in a HD that does not extend into the audience area unless the beam is at least 2.0 meter above the floor level. In environments where unrestrained behavior is reasonably foreseeable, the minimum separation height should be greater than or equal to 3.0 meter to prevent potential exposure, for example by an individual sitting on another individual's shoulders, within the HD. Sufficiently large separation height may be achieved by mounting the image projector on the ceiling or through the use of physical barriers.

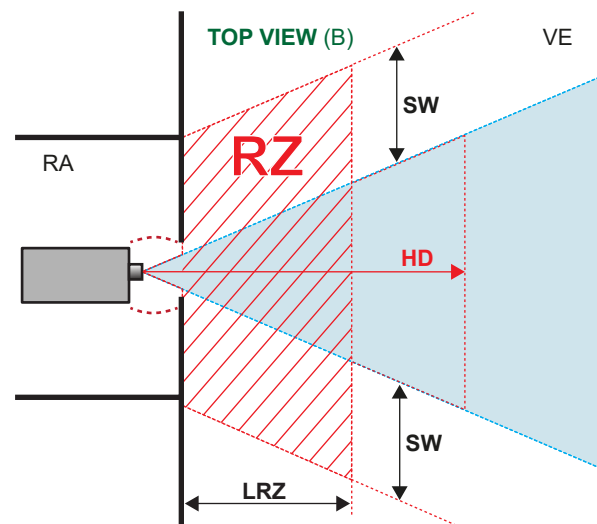
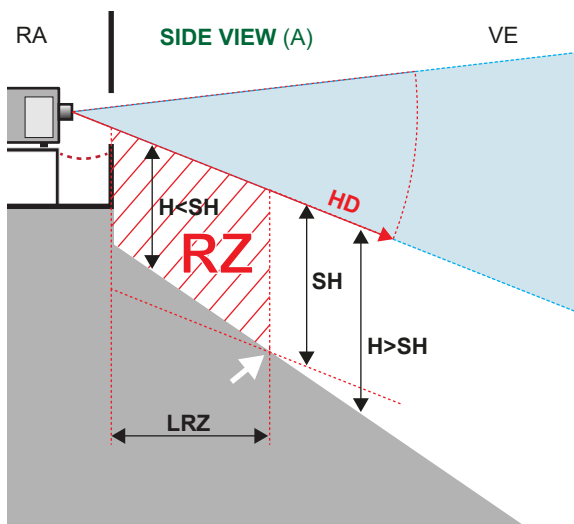


Image 1–2

- A** Side view
- B** Top view
- RA** Restricted Access location (boot area of projector).
- VE** Venue
- RZ** Restriction Zone

- HD** Hazard Distance
- LRZ** Length Restriction Zone
- H** Height between surface floor and the light beam
- SH** Separation Height
- SW** Separation Width

Based on national requirements, no person is allowed to enter the projected beam within the zone between the projection lens and the related hazard distance (HD). This shall be physically impossible by creating sufficient separation height or by placing barriers. The minimum separation height takes into account the surface upon which persons other than operator, performers or employees are permitted to stand.

On [Image 1–3](#) a typical setup is displayed. It must be verified if these minimum requirements are met. If required a restricted zone (RZ) in the venue must be established. This can be done by using physical barrier, like a red rope as illustrated in [Image 1–3](#).

The restricted area sticker can be replaced by a sticker with only the symbol.

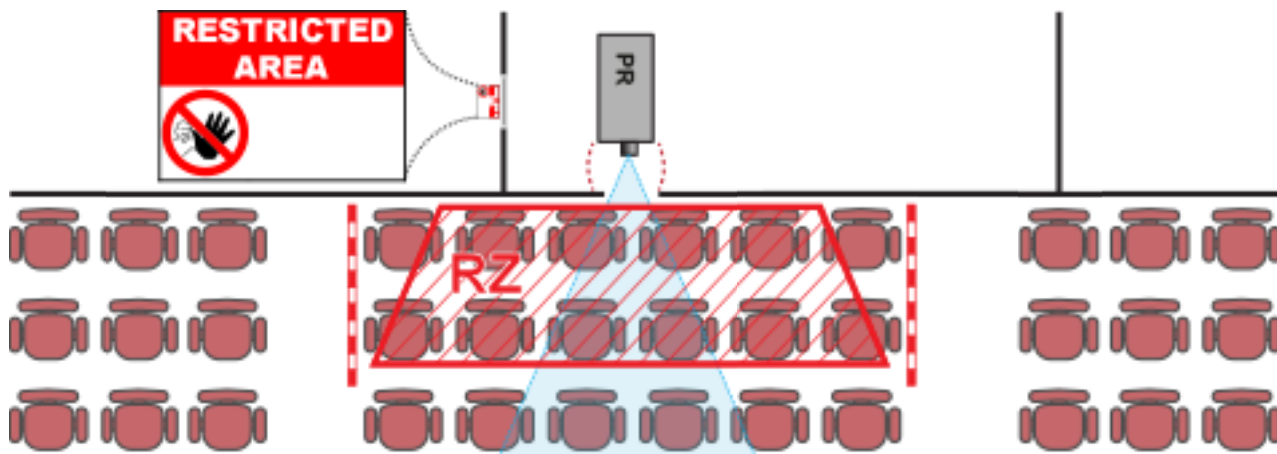


Image 1–3

USA market

For LIPs (Laser Illuminated Projectors) installed in the USA market other restriction zone conditions apply.

LIPs for installation in restrained environment (cinema theaters, business rooms, class rooms, museums ...) shall be installed at height vertically above the floor such that the bottom plane of the hazard distance zone shall be no lower than 2.5 meters above the floor. Horizontal clearance to the hazard distance zone shall be not less than 1 meter. Alternatively, in case the height of the separation barrier for the horizontal clearance is at least 1 meter high then the horizontal clearance (SW) can be reduced to:

- 0 meter if the height of the hazard zone is minimum 2.5 meter.
- 0.1 meter if the height of the hazard zone is minimum 2.4 meter.
- 0.6 meter if the height of the hazard zone is minimum 2.2 meter.

LIPs for installations in unrestrained environment (concerts, ...) shall be installed at a height vertically above the floor such that the bottom plane of the Hazard distance Zone shall be no lower than 3 meters above the floor. Horizontal clearance to the hazard distance zone shall be not less than 2.5 meters. Any human access horizontally to the Hazard Zone, if applicable, shall be restricted by barriers. If human access is possible in an unsupervised environment, the horizontal or vertical clearances shall be increased to prevent exposure to the hazard distance zone.

The LIP shall be installed by Barco or by a trained and Barco-authorized installer or shall only be transferred to laser light show variance holders. This is applicable for dealers and distributors since they may need to install the LIP (demo install) and/or they transfer (sell, rent, lease) the LIP. Dealers and distributors shall preserve sales and installation records for a period of 5 years. Variance holders may currently hold a variance for production of Class IIIB and IV laser light shows and/or for incorporating RG3 LIPs. Laser light show variance for RG3 LIPs can be requested by mailing the application to RadHealthCustomerService@fda.hhs.gov.

The installation checklist for laser illuminated RG3 projectors must be fully completed after the installation. The installation checklist can be downloaded from the Barco website. The installer shall preserve the checklist for a period of 5 years. A copy can remain on-site.

Install one or more readily accessible controls to immediately terminate LIP projection light. The power input at the projector side is considered as a reliable disconnect device. When required to switch off the projector, disconnect the power cord at the projector side. In case the power input at the projector side is not accessible (e.g. truss mount), the socket outlet supplying the projector shall be installed nearby the projector and be easily accessible, or a readily accessible general disconnect device shall be incorporated in the fixed wiring.

1.5 HD for fully enclosed projection systems



HD

Hazard Distance (HD) is the distance measured from the projection lens at which the intensity or the energy per surface unit becomes lower than the applicable exposure limit on the eye or on the skin. The light beam is considered (to be) unsafe for exposure if the distance from a person to the light source is less than the HD.

Restriction Zone (RZ) based on the HD

The projector is also suitable for rear projection applications; projecting a beam onto a diffuse coated projection screen. As displayed in following graphic, two areas should be considered: the restricted enclosed projection area (RA) and the observation area (VE).

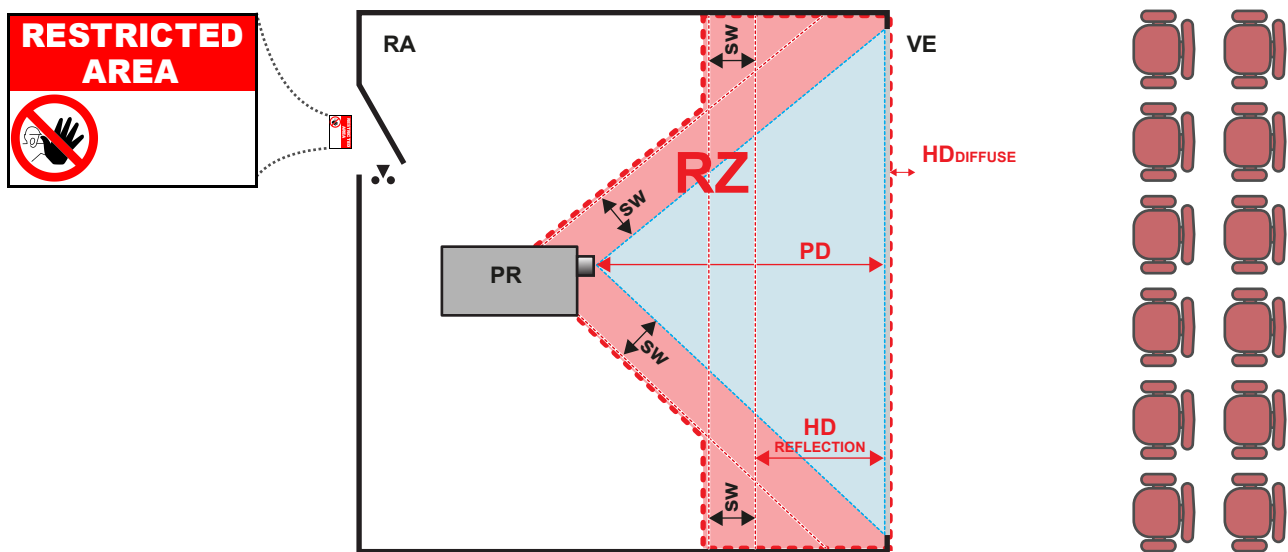


Image 1–4

RA Restricted Access location (enclosed projection area).
PR Projector.
VE Venue (observation area).

RZ Restriction Zone.
PD Projection Distance.
SW Separation Width. Must be minimum 1 meter.

For this type of setup 3 different HD shall be considered:

- HD as discussed in “[High Brightness precautions: Hazard Distance](#)”, page 16, relevant for intrabeam exposure.
- $HD_{\text{reflection}}$: the distance that has to be kept restrictive related to the reflected light from the rear projection screen.
- HD_{diffuse} : the relevant distance to be considered while observing the diffuse surface of the rear projection screen.

As described in “[High Brightness precautions: Hazard Distance](#)”, page 16, it is mandatory to create a restricted zone within the beam areas closer than any HD. In the enclosed projection area the combination of two restricted zones are relevant: The restricted zone of the projected beam toward the screen; taking into account 1 meter Separation Width (SW) from the beam onward. Combined with the restricted zone related to the rear reflection from the screen ($HD_{\text{reflection}}$); also taking into account a 1 meter lateral separation.

The $HD_{\text{reflection}}$ distance equals 25% of the difference between the determined HD distance and the projection distance to the rear projection screen. To determine the HD distance for the used lens and projector model see chapter “[HD in function of modifying optics](#)”, page 19.

$$HD_{\text{reflection}} = 25\% (HD - PD)$$

The light emitted from the screen within the observation shall never exceed the RG2 exposure limit, determined at 10 cm. The HD_{diffuse} can be neglected if the measured light at the screen surface is below 5000 cd/m² or 15000 LUX.

1.6 HD in function of modifying optics

Hazard distance

This projector may become Laser Product-Risk Group 3 (RG3) when installed with lens with throw ratio greater than 2.0. Permanent eye injury is possible when exposed to the high intensity light beam within the hazard distance (HD).

Lens information with resolution WUXGA (0.96''):

Projection Lens Throw ratio	Risk Group	Hazard Distance (HD)	
		G100–W22	G100–W16, G100–W19
0.38 - 2.0	RG2	NA	NA
2.0 - 4.0	RG3	1940 mm	1165 mm
4.0 - 7.2	RG3	4565 mm	4120 mm
7.2 - 10.8	RG3	6400 mm	6400 mm

Projection Lens Throw ratio	Risk Group	Hazard Distance (HD)
		G100–W25
0.38 - 1.5	RG3	1000 mm
1.5 - 2.0	RG3	1300 mm
2.0 - 4.0	RG3	2600 mm
4.0 - 7.2	RG3	5100 mm
7.2 - 10.8	RG3	9200 mm

Follow the precautions to avoid light intensity hazard.

- NEVER look into the lens! High intensity light beam.
- Permanent eye injury is possible when exposed to the high intensity light beam within the hazard distance.
- Operators shall control access to the light beam within the hazard distance or install the product at a height that will prevent eye exposure within the hazard distance.
- Do not place any reflective objects in the light path of the projector.

1.7 HD calculation of multi-projector stacks

Sometimes two or more projectors are stacked (projecting on the same surface). In this case, because of the overlap of the images, possibly a system Hazard Distance needs to be applied instead of a single projector hazard distance.

Only projectors stacked along one axis (horizontal or vertical) should be considered. Physical stacking of projectors in two dimensions (for example 2x2), can be reduced to separate “N”x1 systems.

The information needed is:

- The Hazard Distance (**HD**) of a single projector with the given lens.
- The distance (**h**) between two adjacent projector lens centers in the stack.




For 3 or more projectors, in case the distances between adjacent lenses are not equal, take the shortest distance.

HD calculation:

- For stacking two-projectors:
 - **If the single projector hazard distance $HD \geq 9 \cdot h$** , then the system hazard distance to implement is $1.15 \cdot HD$.
 - **If the single projector hazard distance $HD < 9 \cdot h$** , then keep the original HD and risk zone per projector.
- For stacking “N” projectors along the same axis, “N” being 3 or more:
 - **If the single projector hazard distance $HD \geq 12 \cdot h$** , then the system hazard distance to implement is $(\frac{N}{2} + 0.15) \cdot HD$.
 - **If the single projector hazard distance $9 \cdot h \leq HD < 12 \cdot h$** , then the system hazard distance to implement is $1.15 \cdot HD$.
 - **If the single projector hazard distance $HD < 9 \cdot h$** , then keep the original HD and risk zone per projector.

1.8 Compliance

UK Compliance



This product is fit for use in the UK.

Authorised Representative: Barco UK Ltd

Address: Building 329, Doncastle Road
Bracknell RG12 8PE, Berkshire, United Kingdom

L'information des consommateurs sur la règle de tri



1.9 Download Product Manual

Download product manual

Product manuals and other related documentation are available online at <https://www.barco.com>. Search or browse to the product support page or scan the QR code on the product ID-label or on the box label. To see all service documentation (e. g., spare part list, service manuals, field loadable software ...) you must be registered and logged in.

IMPORTANT! Read Installation instructions before connecting equipment to the mains power supply.

Prepare to install

2

2.1	Installation requirements	24
2.2	Initial inspection	26
2.3	Getting to know the projector	27
2.4	Input/Output (I/O) Panel	30
2.5	Control panel	31
2.6	Overview of the RCU	32
2.7	Adjusting the projector's position	33
2.8	Lens selection	34
2.9	Lenses	35
2.10	Adjusting the image position on the screen	39
2.11	Download Projector Toolset	41

About this chapter

Read this chapter before installing G100 projector. It contains important information concerning installation requirements for the G100 projector, such as minimum and maximum allowed ambient temperature, humidity conditions, required safety area around the installed projector, required power net, etc.

Furthermore, careful consideration of things such as image size, ambient light level, projector placement and type of screen to use are critical to the optimum use of the projection system.



Barco provides a guarantee relating to perfect manufacturing as part of the legally stipulated terms of guarantee. Observing the specification mentioned in this chapter is critical for optimal performance. Neglecting this can result in loss of warranty.

2.1 Installation requirements

Environment conditions

Table below summarizes the physical environment in which the G100 projector may be safely operated or stored.

Environment	Operating	Non-Operating
Ambient Temperature	5°C (41°F) to 50°C (122°F)	-10°C (14°F) to 60°C (140°F)
Humidity	10% to 85% RH Non-Condensed	5% to 90% RH Non-Condensed
Altitude	10000 ft maximum at 0°C to 30°C	
Air cleanliness	Clean office environment	Clean office environment



Let the projector acclimatize after unpacking. Neglecting this may result in a startup failure of the Light Processor.

Cooling requirements

The projector is fan cooled and must be installed with sufficient space around the projector head, minimum 500 cm (197") to ensure sufficient air flow. It should be used in an area where the ambient temperature, as measured at the projector air inlet, does not exceed +50°C (+122°F).

For 360° installations and multi-projector setups, make sure to have at least 500 cm (197") space around the air inlets and outlet of the projector.

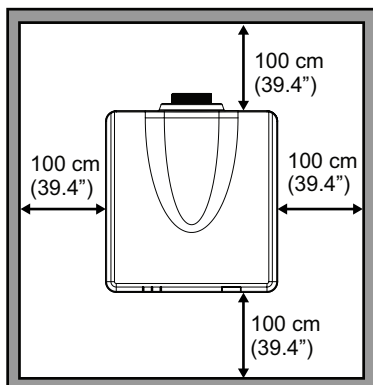


Image 2-1

Clean air environment

The projector must be installed in environments where the dust conditions are as low as expected in a standard office environment. The environment should be clean and free from hostile airborne particles which may have harmful effects on the internal parts of the projector (e.g., airborne contaminants produced by smoke or snow machines, contaminants derived from chemical products such as e.g., disinfectants, conducting types of dust, excessive dust).

The projector must always be mounted in a manner which ensures the free flow of clean air into the projectors ventilation inlets. For installations in environments where the projector is subject to airborne contaminants such as that produced by smoke machines or similar (these deposit a thin layer of greasy residue upon the projectors internal optics and imaging electronic surfaces, degrading performance), then this contamination must be removed prior to it reaching the projectors clean air supply. Devices or structures to extract or shield contaminated air well away from the projector are a prerequisite, if this is not a feasible solution then measures to relocate the projector to a clean air environment should be considered.

Only ever use the manufacturer's recommended cleaning kit which has been specifically designed for cleaning optical parts, never use industrial strength cleaners on the projector's optics as these will degrade optical coatings and damage sensitive optoelectronics components. Failure to take suitable precautions to protect the projector from the effects of persistent and prolonged air contaminants will culminate in extensive

and irreversible ingrained optical damage. At this stage cleaning of the internal optical units will be noneffective and impracticable. Damage of this nature is under no circumstances covered under the manufacturer's warranty and may deem the warranty null and void. In such a case the client shall be held solely responsible for all costs incurred during any repair. It is the clients responsibility to ensure at all times that the projector is protected from the harmful effects of hostile airborne particles in the environment of the projector. The manufacturer reserves the right to refuse repair if a projector has been subject to knowingly neglect, abandon or improper use.



CAUTION: If the specified environmental conditions cannot be guaranteed (e.g., during construction works), the projector must be removed, or switched off and fully protected until the requirements are fulfilled.



Contact Barco in case uncertainty exist on the environmental conditions linked to air contamination prior to install and operate the projector.

Main power requirements

The G100 projector operates from a nominal mono phase power net with a separate earth ground PE.

Power requirements : 120-160 V / 200-240 V (+/-10%), 20 A, 50-60 Hz

The power cord required to connect the projector with the power net is delivered with the projector.

Projector weight

Do not underestimate the weight of the projector. Be sure that the pedestal or ceiling mount on which the projector has to be installed is capable of handling five (5) times the complete load of the system.

Projector	Weight (without lens)
G100-W16, G100-W19	50.0 kg / 110.23 lb
G100-W22	53.5 kg / 117.95 lb

2.2 Initial inspection

General

Before shipment, the projector was inspected and found to be free of mechanical and electrical defects. As soon as the projector is unpacked, inspect for any damage that may have occurred in transit. Save all packing material until the inspection is completed. If damage is found, file claim with carrier immediately. The Barco Sales and Service office should be notified as soon as possible.

Box content

This projector comes with all the items shown below. Check to make sure your package is complete. Contact your dealer immediately if anything is missing.

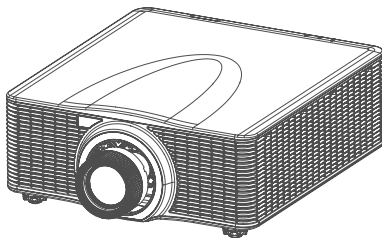


Image 2-2 Projector



Image 2-3 Remote control

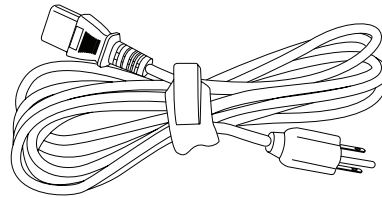


Image 2-4 Power cord

The product Safety Manual and Quick Start Guide are also included. Download the complete and latest updated installation manual and user guide from the Barco website.



The projection lens is an optional item, not a standard accessory in the package.



Due to the difference in applications for each country, some regions may have different accessories.



Batteries are not included. Use 2 AAA type batteries.

Mechanical check

This check should confirm that there are no broken knobs or connectors, that the cabinet and panel surfaces are free of dents and scratches, and that the operating panel is not scratched or cracked. The Barco Sales and Service office should be notified as soon as possible if this is not the case.

2.3 Getting to know the projector

Orientation convention

This manual refers to the left side of the projector as the side at your left hand when standing behind the projector and looking at the projection screen in front of the projector.

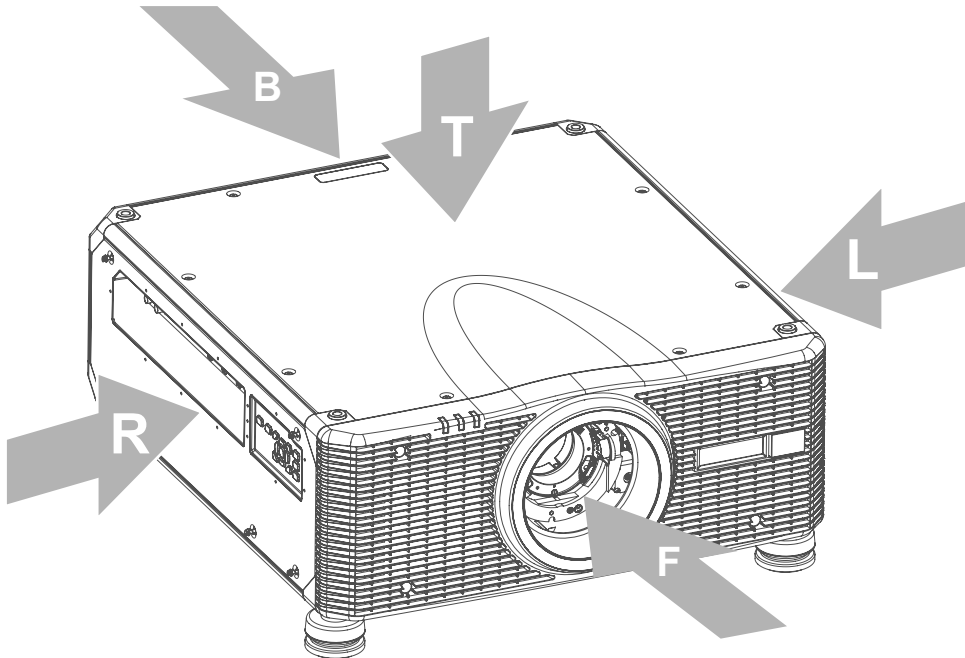


Image 2-5

T Top
L Left
F Front

R Right
B Back

Component location

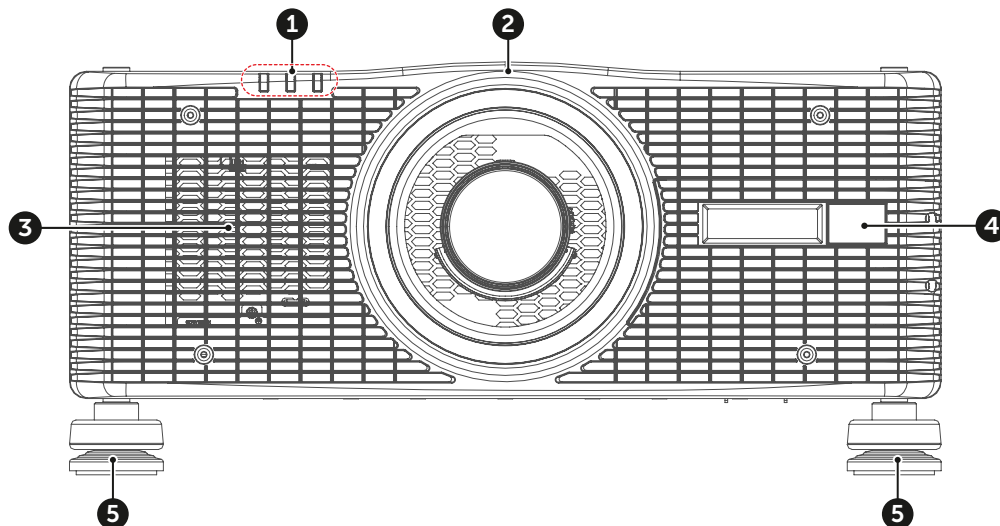


Image 2-6 Front view

1 Status LEDs
2 Projection lens
3 Cooling air vents (intake)

4 Front IR sensor
5 Adjustment feet

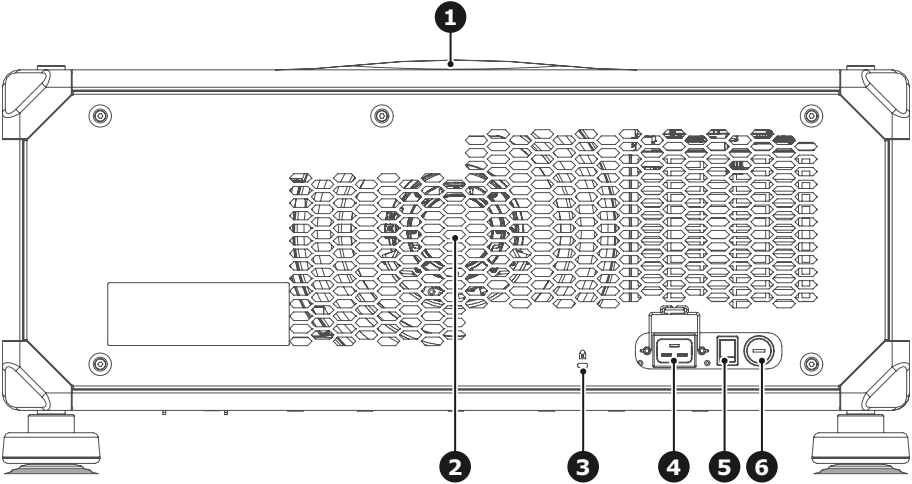


Image 2-7 Rear view

- | | | | |
|---|-----------------------------|---|---------------|
| 1 | Top IR sensor | 4 | AC input |
| 2 | Cooling air vents (exhaust) | 5 | Power switch |
| 3 | Kensington lock | 6 | Fuse location |

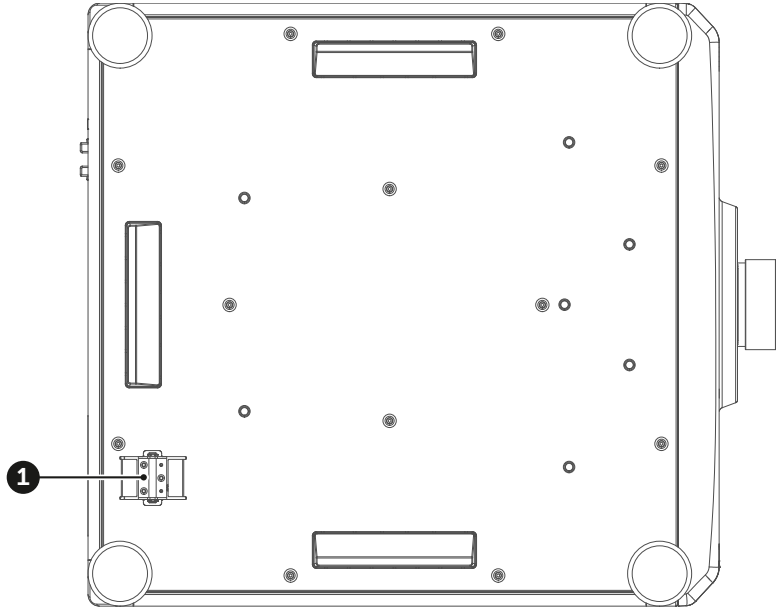


Image 2-8 Bottom view

- 1 Anti-theft bar

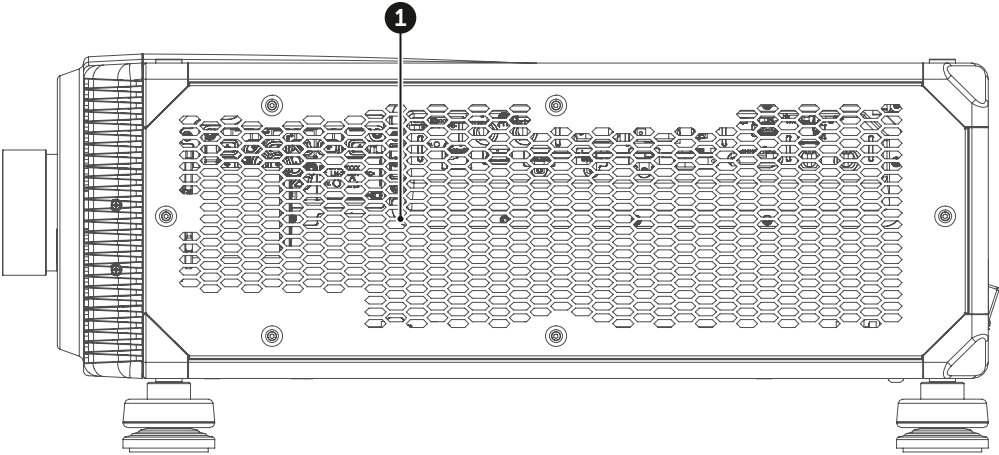


Image 2-9

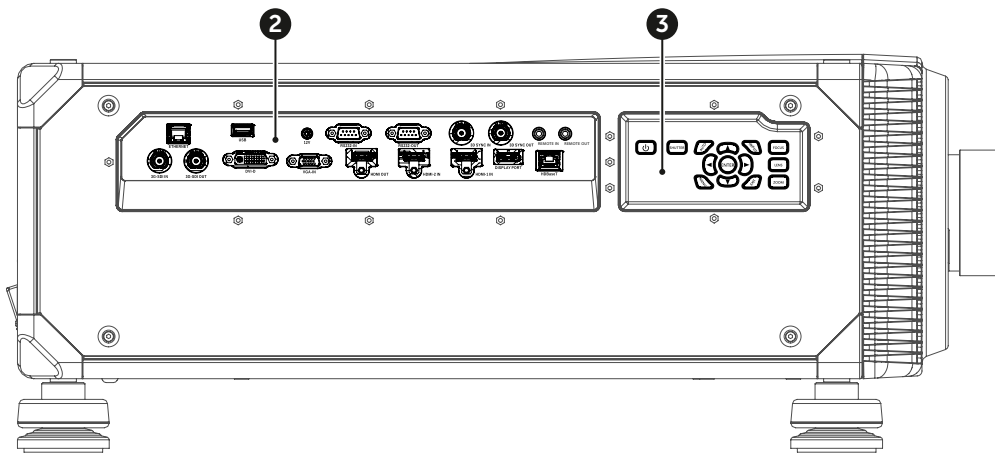


Image 2-10 Side views

- 1 Cooling air vents (intake)
- 2 Input / Output panel
- 3 Built-in keypad

Airflow

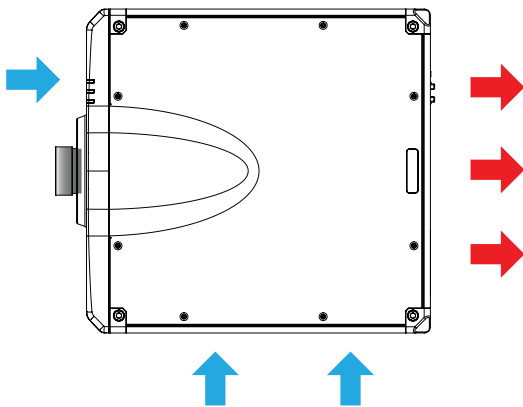


Image 2-11

2.4 Input/Output (I/O) Panel

Input and output ports location

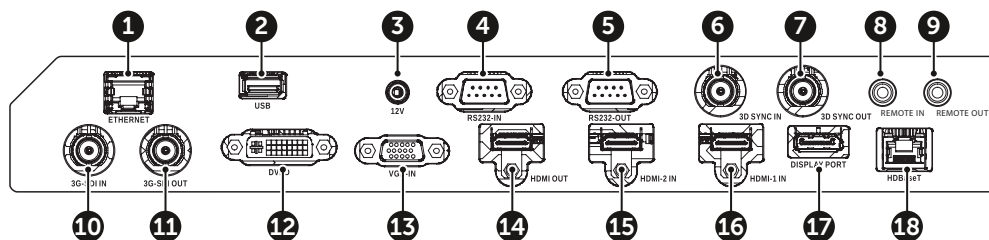


Image 2-12

N-r.	Name	Type	Cable	Example connections ¹
1	Ethernet	Control port	RJ-45 cable	Local or company network
2	USB Type A	Control port	USB power cable	PC, USB flash drive
3	12V	Control port	12V trigger cable	motorized screen, curtain, etc
4	RS-232-IN	Control port	RS-232 cable	PC
5	RS-232-OUT	Control port	RS-232 cable	PC
6	3D Sync IN	Input	3D sync cable	PC
7	3D Sync OUT	Output	3D emitter cable	3D emitter
8	Remote IN	Control port	Wired remote cable	RCU
9	Remote OUT	Control port	Wired remote cable	RCU
10	3G-SDI IN	Input	3G-SDI cable	Camera
11	3G-SDI OUT	Output	3G-SDI cable	Screen, other projectors
12	DVI-D	Input	DVI-D cable	PC
13	VGA-IN	Input	VGA cable	PC
14	HDMI OUT (HDMI 2.0)	Output	HDMI cable	Screen
15	HDMI-2 IN (HDMI 2.0)	Input	HDMI cable	PC, game console, media player
16	HDMI-1 IN (HDMI 2.0)	Input	HDMI cable	PC, game console, media player
17	DisplayPort 1.2a	Input	DisplayPort cable	PC, Mac
18	HDBaseT	Input	RJ-45 cable	Media player

1. These are just a few examples of what you can connect. There may be more options available for each port.

2.5 Control panel

Button location

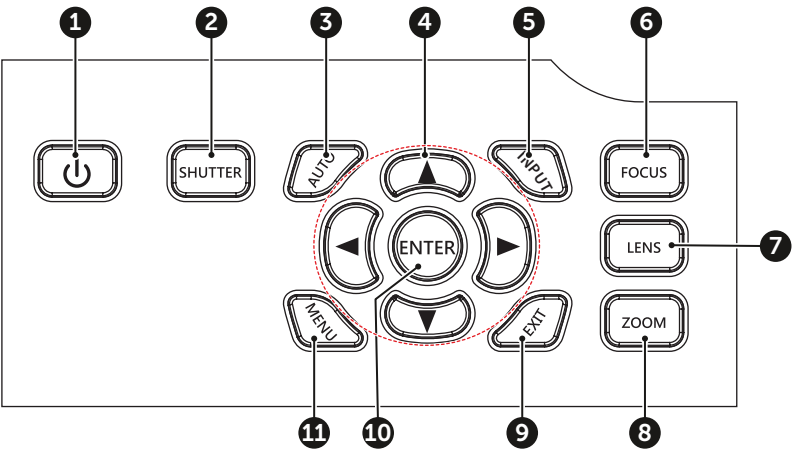


Image 2-13

- | | | | |
|---|------------|----|-------|
| 1 | Power | 7 | Lens |
| 2 | Shutter | 8 | Zoom |
| 3 | Auto | 9 | Exit |
| 4 | Arrow keys | 10 | Enter |
| 5 | Input | 11 | Menu |
| 6 | Focus | | |


Button function

Button	Function
Power	Turns the projector on or off
Shutter	Opens or closes the shutter
Auto	Automatic setup
Arrow keys	Navigation keys
Input	Selects an input source
Focus	Adjusts the image focus
Lens	Adjusts lens position
Zoom	Adjusts the image size
Exit	Returns to previous menu or exit menu if at top level
Enter	Confirms the settings
Menu	Shows the main menu on screen

2.6 Overview of the RCU

Button identification

Button location

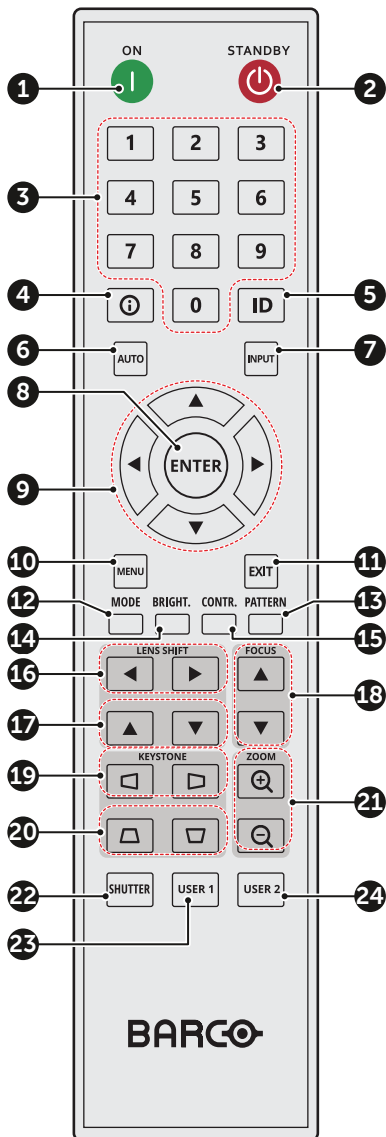

No.	Button	Function
1	ON	Turn the projector on.
2	Standby	Turn the projector off.
3	Number	Input numbers (0-9)
4	Info	Display information on the source image.
5	ID	Set the projector address.
6	Auto	Automatically synchronize the projector to an input source.
7	Input	Select an input source manually.
8	Enter	Confirm an selection.
9	Arrow keys	Use arrow keys to navigate through the menu or select the appropriate settings.
10	Menu	Show the main menu on the screen.
11	Exit	Back to previous menu.
12	Mode	Press to select the preset display mode.
13	Pattern	Displays test patterns
14	Brightness	Set the brightness of the image.
15	Contrast	Set the contrast of the image.
16	Lens shift H	Adjust the image position horizontally.
17	Lens shift V	Adjust the image position vertically.
18	Focus	Adjust the image focus.
19	Keystone H	Adjust a horizontally keystone image.
20	Keystone V	Adjust a vertically keystone image.
21	Zoom	Adjust the image size.
22	Shutter	Momentarily turn off/on the screen (AV Mute).
23	User1	Press to assign custom functions. See user guide for more info.
24	User2	Press to assign custom functions. See user guide for more info.

2.7 Adjusting the projector's position

Positioning the projector

To determine where to position the projector, consider the size and shape of your screen, the location of your power outlets, and the distance between the projector and the rest of your equipment. Here are some general guidelines:

- Position the projector on a flat surface at a right angle to the screen.
- Position the projector to the desired distance from the screen. The distance between the lens and the screen, the zoom settings, and the video format determine the size of the projected image. For projection distances of each lens, see chapter [“Lenses”, page 35](#).
- 360 degree free orientation installation:

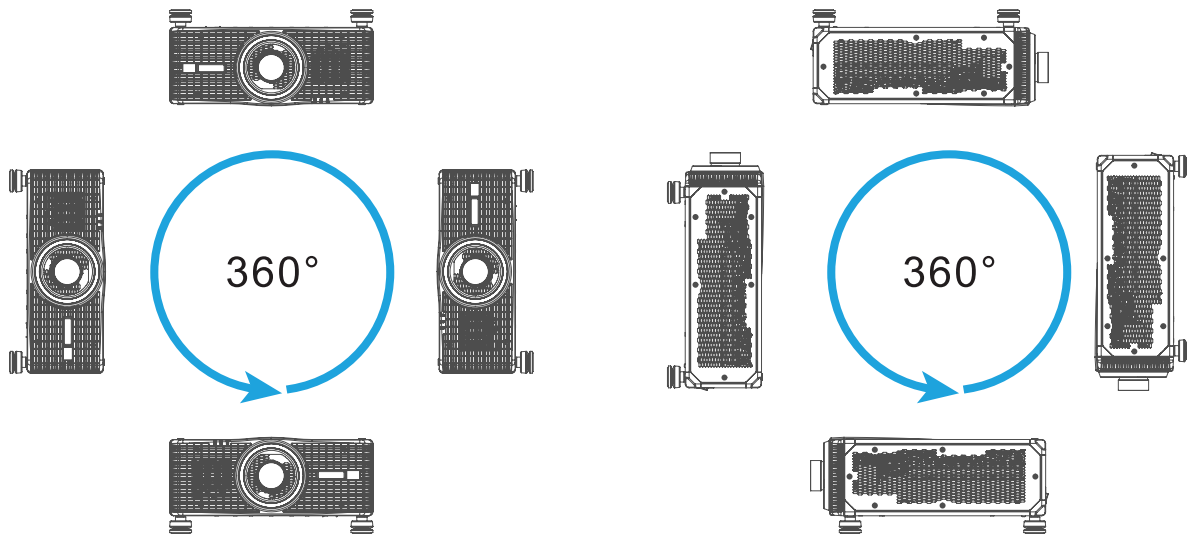


Image 2-14

2.8 Lens selection

How to select the right lens

1. Determine the required screen width (SW).
2. Determine the approximate position of the projector in the room.
3. Start up the *Lens Calculator* on the Barco website: <https://lenscalculator.barco.com/> to determine the possible lenses for your configuration.

The Lens Calculator window opens.

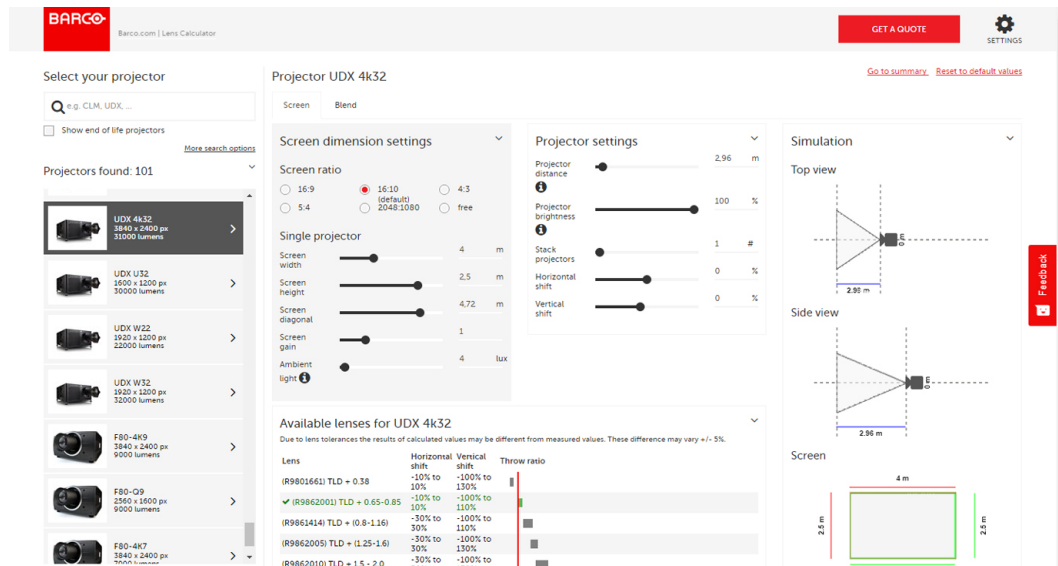


Image 2–15 Lens calculator



The Lens Calculator can also be used to determine the position of the projector when the lens type and screen width is known.














Due to lens tolerances the results of calculated values may be different from measured values. These difference may vary +/- 5%.

2.9 Lenses



The table below is subject to changes and was last updated on 2023-09-11. Consult Barco's web site for the most recent information about available lenses.

Available lenses

Order No	Description	Image
R9802188 ⁴	GC+ lens (0.65 - 0.75 : 1)	
R9802181 ²	GC lens (0.84 - 1.02 : 1)	
R9802182 ^{3,2}	GC lens (1.02 - 1.36 : 1)	
R9802183 ²	GC lens (1.2 - 1.5 : 1)	
R98021831 ⁴	GC+ lens (1.2 - 1.5 : 1)	
R9802184 ²	GC lens (1.5 - 2.0 : 1)	
R98021841 ⁴	GC+ lens (1.5 - 2.0 : 1)	
R9802185 ²	GC lens (2.0 - 4.0 : 1)	
R98021851 ⁴	GC+ lens (2.0 - 4.0 : 1)	
R9802186 ²	GC lens (4.0 - 7.2 : 1)	
R98021861 ⁴	GC+ lens (4.0 - 7.2 : 1)	
R9802187 ⁴	GC+ lens (7.2 - 10.8 : 1)	
R9801832	FLDX lens (0.38 : 1) UST 90° (Requires lens adapter R9802360 and lens support R9802365 . For installation instructions see chapter " FLDX lens (0.38 : 1) UST 90° ", page 63 .)	
R9803362	GC++ lens(1.08-1.5:1)	
R9803365	GC++ lens(0.75-1.08:1)	

2. This lens does not support the lens memory feature.
 3. Not available for the G100-W25
 4. Lens memory for focus, zoom and shift.

Lens specification table

Projection Lens			R9802188 ⁴		R9802181 ²		R9802182 ²		R9802183 ² R98021831 ⁴		R9802184 ² R98021841 ⁴	
			Short Zoom		Wide Zoom		Wide Zoom		Wide Zoom		Standard	
Throw Ratio			0.65 - 0.75		0.84 - 1.02		1.02 - 1.36		1.2 - 1.5		1.5 - 2	
Zoom Ratio			1.15X		1.2X		1.33X		1.25X		1.33X	
Throw Distance			0.70~8.08		0.90~10.98		1.10~14.65		1.34~16.69		1.64~21.75	
Vertical Lens Shift (optical)			+/- 102%		+/- 74%		+/- 82%		+/- 120%		+/- 120%	
Horizontal Lens Shift (optical)			+/- 48%		+/- 26%		+/- 30%		+/- 50%		+/- 50%	
Screen size			Projection distance (m)									
Diagonal (inch)	Height (m)	Width (m)	Wide (m)	Tele (m)	Wide (m)	Tele (m)	Wide (m)	Tele (m)	Wide (m)	Tele (m)	Wide (m)	Tele (m)
50	0.67	1.08	0.70	0.81	0.90	1.10	1.10	1.46	1.34	1.67	1.64	2.18
60	0.81	1.29	0.84	0.97	1.09	1.32	1.32	1.76	1.60	2.00	1.96	2.61
70	0.94	1.51	0.98	1.13	1.27	1.54	1.54	2.05	1.87	2.34	2.29	3.05
80	1.08	1.72	1.12	1.29	1.45	1.76	1.76	2.34	2.14	2.67	2.62	3.48
90	1.21	1.94	1.26	1.45	1.63	1.98	1.98	2.64	2.40	3.00	2.95	3.92
100	1.35	2.15	1.40	1.62	1.81	2.20	2.20	2.93	2.67	3.34	3.27	4.35
110	1.48	2.37	1.54	1.78	1.99	2.42	2.42	3.22	2.94	3.67	3.60	4.79
120	1.62	2.58	1.68	1.94	2.17	2.64	2.64	3.52	3.21	4.01	3.93	5.22
130	1.75	2.80	1.82	2.10	2.35	2.86	2.86	3.81	3.47	4.34	4.26	5.66
140	1.88	3.02	1.96	2.26	2.53	3.08	3.08	4.10	3.74	4.67	4.58	6.09
150	2.02	3.23	2.10	2.42	2.71	3.30	3.30	4.39	4.01	5.01	4.91	6.53
160	2.15	3.45	2.24	2.58	2.89	3.52	3.52	4.69	4.27	5.34	5.24	6.96
170	2.29	3.66	2.38	2.75	3.08	3.73	3.73	4.98	4.54	5.68	5.57	7.40
180	2.42	3.88	2.52	2.91	3.26	3.95	3.95	5.27	4.81	6.01	5.89	7.83
190	2.56	4.09	2.66	3.07	3.44	4.17	4.17	5.57	5.07	6.34	6.22	8.27
200	2.69	4.31	2.80	3.23	3.62	4.39	4.39	5.86	5.34	6.68	6.55	8.70
250	3.37	5.38	3.50	4.04	4.52	5.49	5.49	7.32	6.68	8.35	8.18	10.88
300	4.04	6.46	4.20	4.85	5.43	6.59	6.59	8.79	8.01	10.02	9.82	13.05
350	4.71	7.54	4.90	5.65	6.33	7.69	7.69	10.25	9.35	11.68	11.46	15.23
400	5.38	8.62	5.60	6.46	7.24	8.79	8.79	11.72	10.68	13.35	13.10	17.40
450	6.06	9.69	6.30	7.27	8.14	9.89	9.89	13.18	12.02	15.02	14.73	19.58
500	6.73	10.77	7.00	8.08	9.05	10.98	10.98	14.65	13.35	16.69	16.37	21.75
550	7.40	11.85	-	-	-	-	-	-	-	-	-	-
600	8.08	12.92	-	-	-	-	-	-	-	-	-	-

Projection Lens		R9802185 ² R98021851 ⁴	R9802186 ² R98021861 ⁴	R9802187 ⁴	R9801832
		Long Zoom	Ultra Long Zoom	Ultra Long Zoom	Ultra Short Throw
Throw Ratio		2 - 4	4 - 7.2	7.2 - 10.8	0.38
Zoom Ratio		2X	1.8X	1.5X	-
Throw Distance		2.10~42.43	4.25~76.89	7.75~116.31	0.54~5.03

Projection Lens			R9802185 ² R98021851 ⁴		R9802186 ² R98021861 ⁴		R9802187 ⁴		R9801832	
			Long Zoom		Ultra Long Zoom		Ultra Long Zoom		Ultra Short Throw	
Vertical Lens Shift (optical)			+/- 120%		+/- 120%		+/- 120%		-	
Horizontal Lens Shift (optical)			+/- 50%		+/- 50%		+/- 50%		-	
Screen size			Projection distance (m)							
Diagonal (inch)	Height (m)	Width (m)	Wide (m)	Tele (m)	Wide (m)	Tele (m)	Wide (m)	Tele (m)	-	
50	0.67	1.08	2.10	4.24	4.25	7.69	7.75	11.63	-	
60	0.81	1.29	2.52	5.09	5.10	9.23	9.30	13.96	-	
70	0.94	1.51	2.94	5.94	5.96	10.77	10.86	16.28	0.54	
80	1.08	1.72	3.36	6.79	6.81	12.30	12.41	18.61	0.62	
90	1.21	1.94	3.78	7.64	7.66	13.84	13.96	20.94	0.71	
100	1.35	2.15	4.20	8.49	8.51	15.38	15.51	23.26	0.79	
110	1.48	2.37	4.62	9.34	9.36	16.92	17.06	25.59	0.87	
120	1.62	2.58	5.04	10.18	10.21	18.45	18.61	27.91	0.96	
130	1.75	2.80	5.46	11.03	11.06	19.99	20.16	30.24	1.04	
140	1.88	3.02	5.88	11.88	11.91	21.53	21.71	32.57	1.13	
150	2.02	3.23	6.30	12.73	12.76	23.07	23.26	34.89	1.21	
160	2.15	3.45	6.72	13.58	13.61	24.61	24.81	37.22	1.30	
170	2.29	3.66	7.14	14.43	14.46	26.14	26.36	39.55	1.38	
180	2.42	3.88	7.56	15.28	15.31	27.68	27.91	41.87	1.47	
190	2.56	4.09	7.98	16.12	16.17	29.22	29.47	44.20	1.55	
200	2.69	4.31	8.40	16.97	17.02	30.76	31.02	46.52	1.64	
250	3.37	5.38	10.50	21.22	21.27	38.45	38.77	58.16	2.06	
300	4.04	6.46	12.60	25.46	25.52	46.14	46.52	69.79	2.49	
350	4.71	7.54	14.70	29.70	29.78	53.83	54.28	81.42	2.91	
400	5.38	8.62	16.80	33.95	34.03	61.52	62.03	93.05	3.33	
450	6.06	9.69	18.90	38.19	38.29	69.21	69.79	104.68	3.76	
500	6.73	10.77	21.00	42.43	42.54	76.89	77.54	116.31	4.18	
550	7.40	11.85	-	-	-	-	-	-	-	
600	8.08	12.92	-	-	-	-	-	-	-	

Projection Lens			R9803365		R9803362	
			Short Zoom		Long Zoom	
Throw Ratio			0.75 - 1.08		1.08 - 1.50	
Zoom Ratio			1.44X		1.39X	
Throw Distance			0.65~9.98		0.94~13.79	
Vertical Lens Shift (optical)			+/- 120%		+/- 120%	
Horizontal Lens Shift (optical)			+/- 50%		+/- 50%	
Screen size			Projection distance (m)			
Diagonal (inch)	Height (m)	Width (m)	Wide (m)	Tele (m)	Wide (m)	Tele (m)
50	0.67	1.08	0.65	0.96	0.94	1.33

Projection Lens			R9803365		R9803362	
			Short Zoom		Long Zoom	
60	0.81	1.29	0.79	1.16	1.15	1.61
70	0.94	1.51	0.93	1.36	1.35	1.88
80	1.08	1.72	1.07	1.56	1.55	2.16
90	1.21	1.94	1.21	1.76	1.75	2.44
100	1.35	2.15	1.35	1.96	1.95	2.72
110	1.48	2.37	1.49	2.16	2.15	2.99
120	1.62	2.58	1.63	2.36	2.35	3.27
130	1.75	2.80	1.77	2.56	2.55	3.55
140	1.88	3.02	1.91	2.76	2.75	3.82
150	2.02	3.23	2.05	2.96	2.96	4.10
160	2.15	3.45	2.18	3.16	3.16	4.38
170	2.29	3.66	2.32	3.36	3.36	4.65
180	2.42	3.88	2.46	3.57	3.56	4.93
190	2.56	4.09	2.60	3.77	3.76	5.21
200	2.69	4.31	2.74	3.97	3.96	5.49
250	3.37	5.38	3.44	4.97	4.97	6.87
300	4.04	6.46	4.14	5.97	5.97	8.25
350	4.71	7.54	4.84	6.98	6.98	9.64
400	5.38	8.62	5.53	7.98	7.98	11.02
450	6.06	9.69	6.23	8.98	8.99	12.41
500	6.73	10.77	6.93	9.98	9.99	13.79
550	7.40	11.85	-	-	-	-
600	8.08	12.92	-	-	-	-

2.10 Adjusting the image position on the screen

On axis / off axis projection

The position of the projector with reference to the screen may also be different depending on the installation. Basically the projector can be positioned in On-Axis or Off-Axis configuration. On-Axis configuration means that the projector is positioned so as to have the centre of the lens coinciding with the centre of the screen. Off-Axis projection is obtained by shifting the lens up, down, left or right.

Shift range

The lens can be shifted with respect to the DMD (P) which result in a shifted image on the screen (Off-Axis). A 100% shift means that the centre point of the projected image is shifted by half the screen size. In other words, the centre point of the projected image falls together with the outline of the image in an On-Axis projection. Due to mechanical and optical limitations it's recommended to keep the shift values within the field of view (F) as illustrated below. Within these shift ranges the projector and lens perform excellently. Configuring the projector outside these shift ranges will result in a slight decline of image quality.

G100 Vertical Shift range: 120%

G100 Horizontal Shift range: 50%

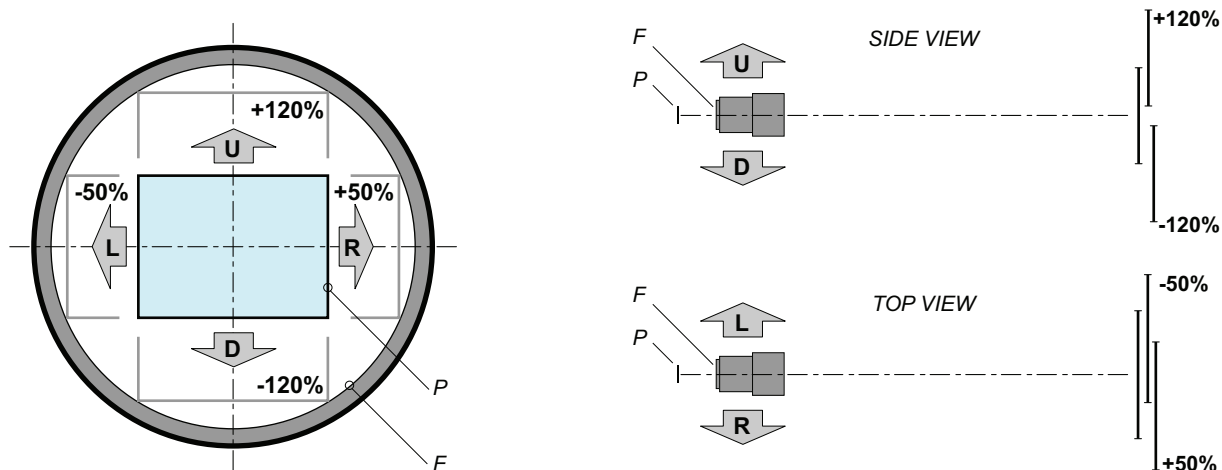


Image 2-16

D DMD
F Field of view



It is mechanically possible to shift outside the recommended field of view, but it will result in a decline of image quality depending on the used lens and the zoom position of the used lens. Furthermore, shifting too much in both directions will result in a blurred image corner.

See user guide for instructions on how to shift the lens holder (*Installation* menu > *Lens Shift*).

Recommendations concerning image reflections in dark images

Image artefacts are reflections of the off-state light on the first lens element back to the chip. In order to avoid these type of image artefacts becoming visible in dark images, it is advised to shift the lens until the reflections are outside of the visual area.

- For lens **R9802181**, you do not have image artefacts when you shift up over +56% vertically.
- For lens **R9802182**, you do not have image artefacts when you shift up over + 64% vertically, or if you shift down below -22% vertically.

R9802181

Vertical offset > 56%





Image 2-17

R9802182

Vertical offset > 64%



Vertical offset < -22%

Image 2-18

2.11 Download Projector Toolset

About Projector Toolset

Projector Toolset is a software tool to set up, configure, manage and control Barco projectors. It is a standalone application that runs on a Java Virtual Machine and that does not require extra services to run.



Projector Toolset is only available in a download version, no CD can be ordered.

Where to find the download file(s)

1. Go to the product support page of the Projector Toolset on the Barco website or use following URL: <https://www.barco.com/support?pn=R9850559>
2. Activate the “Driver & Software” tab page and download the software package for your applicable operating system.
3. Activate the “Documentation” tab page and download the Projector Toolset manual for the G100 (Pulse) projector.

Installation

Follow the installation instructions as written in the Projector Toolset manual.

Installation procedures

3

3.1	RCU battery installation	44
3.2	Connecting the projector with the power net.....	45
3.3	Installing the lens.....	46
3.4	Lens safety cable installation	47
3.5	Boresight (Scheimpflug) adjustment.....	48
3.6	Projector Address (ID).....	51
3.7	Using the RCU	52
3.8	Software update	53
3.9	Creating a backup	55
3.10	Restoring a backup.....	57




To install the UST lens see chapter “FLDX lens (0.38 : 1) UST 90°”, page 63.

3.1 RCU battery installation

How to install the batteries of the Remote Control Unit

1. Remove the cover by sliding it in the direction indicated by the arrow
2. Insert two new AAA (alkaline) batteries (observe the polarity).

 **Note:** Batteries are not delivered with the RCU!

3. Replace the cover.

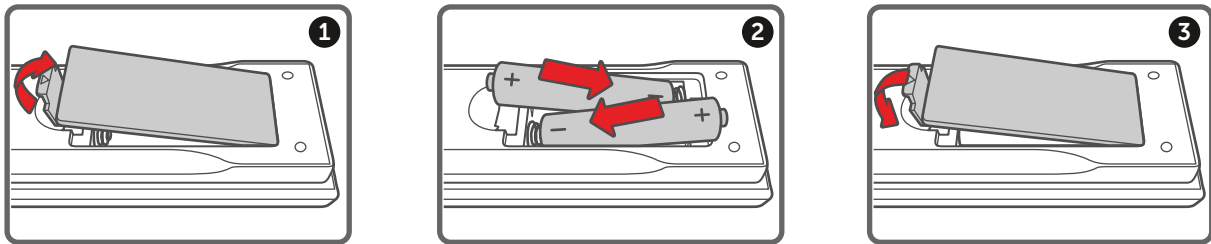


Image 3-1

Notes for the Remote Control Unit

- Be sure to insert the batteries in the corresponding orientations to match the polarities.
- Do not mix new batteries with used batteries as it would shorten the life of new batteries or cause leakage.
- Only used AAA batteries as instructed; do not attempt to insert different types of batteries into the remote control.
- If the remote is going to be unused for long periods of time, be sure to remove the batteries to prevent leakage, which could damage the remote control.
- The liquid contents in the batteries is harmful to the skin; do not touch the leakage with your bare hands directly. When installing fresh batteries, be sure to clean up the leakage thoroughly.
- Under most circumstances, you only need to point the remote control towards the screen and the IR signal would be reflected off the screen and picked up by the IR sensor on the projector. But under specific circumstances, the projector may fail to receive signals from the remote control due to environmental factors. When this happens, orient the remote control at the projector and try again.
- If the range of effective remote control signal reception decreases or if the remote control stops working, replace the batteries.
- If the infrared receiver is exposed to fluorescent lamp or strong sunlight, the remote control may not operate normally.
- Refer to the regulations enforced by your local government on the disposal of used batteries; improper disposal could damage the environment.

3.2 Connecting the projector with the power net



CAUTION: Use only the power cord supplied with your device. When no power cord for your region/country is provided, contact your dealer. The power cord must be suited for the electrical ratings indicated on the product ID label. Only power cords according to the local electrical code regulations can be used.

How to connect with local power net

1. Ensure that the power switch stands in the '0' (OFF) position (reference 1)
2. Connect the female side of the power cord with the power input socket of the projector (reference 2).

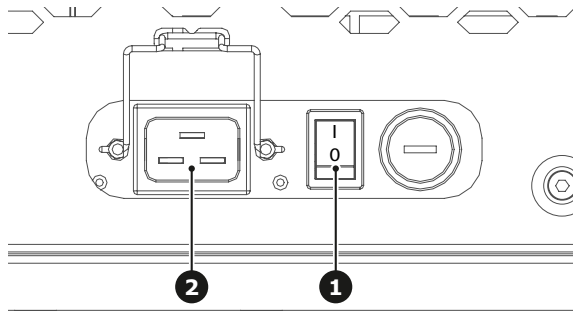


Image 3-2

3. Connect the male side of the power cord to the local power net.



Caution: Ensure that the power net meets the power requirements of the projector.



Warning: Do not attempt operation if the AC supply and cord are not within the specified voltage and power range.

3.3 Installing the lens



This procedure is not applicable for the 90° UST lens. For installation instructions of the 90° UST lens see chapter “[FLDX lens \(0.38 : 1\) UST 90°](#)”, page 63.

How to install the lens

1. Remove the lens cap. Rotate the cap counterclockwise to help remove it.



Caution: Lens cap should be removed before installing the lens. If not it will damage the projector.

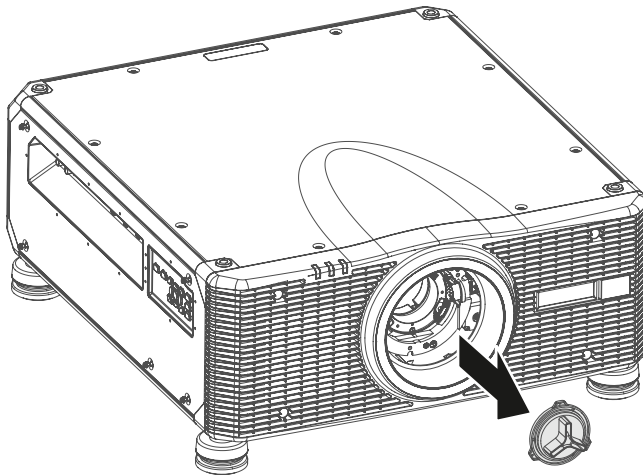


Image 3–3

2. Gently insert the lens in the lens holder.
3. Rotate the lens clockwise to lock the lens.

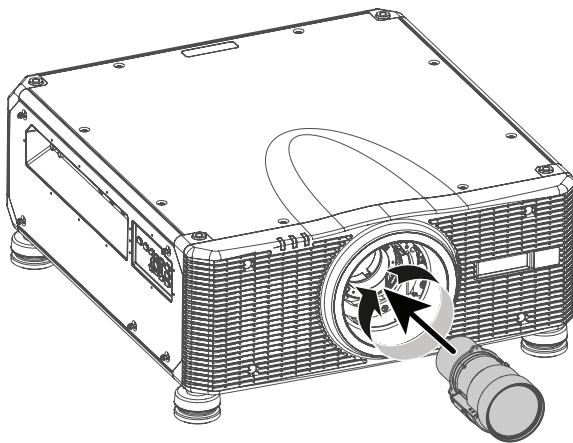


Image 3–4

4. Is the projector installed above the head of people?
► If yes, install the lens safety cable. See chapter “[Lens safety cable installation](#)”, page 47.



CAUTION: Do not transport the projector with any lens installed.

3.4 Lens safety cable installation

When to use the lens safety cable

The projection lens must be secured with a safety cable in any circumstance where the projector is mounted above people.



For ordering information see Barco website: <https://www.barco.com>

How to install

1. Check if the safety cable and its accessories are in good condition (not damaged).
2. Put the safety cable around the lens body and guide one cable end through the loop (reference 1, [Image 3–5](#)) of the other end to create a lasso.
3. Apply some cable clips (reference 2 [Image 3–5](#)) on the lens body to keep the safety cable in position.
4. Pull the lasso tight around the lens body and fixate this position with the cable clamp (reference 3).



Warning: Ensure that the loop cable and the cable going through the loop are clamped together.

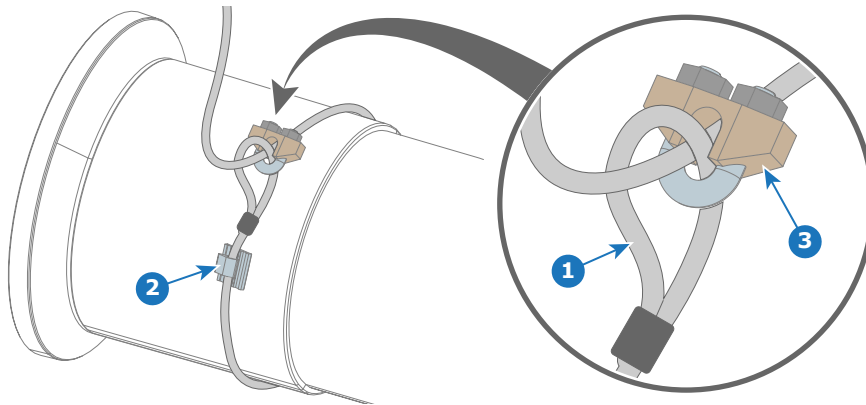


Image 3–5

5. Attach the other end of the safety cable with the projector body, rigging frame, truss installation, or ceiling.



Note: The safety cable is mounted as backup so that the drop distance is as small as possible. Keep the possible drop distance of the lens as short as possible!

3.5 Boresight (Scheimpflug) adjustment

What is Boresight (Scheimpflug)

The lens holder has to be adjusted so that the “sharp focus plane” of the projected image falls together with the plane of the screen (Fp1→Fp2). This is achieved by changing the distance between the DMD plane and the lens plane (Lp1→Lp2). The closer the lens plane comes to the DMD plane the further the sharp focus plane will be. It can occur that you won't be able to get a complete focused image on the screen due to a tilt (or swing) of the lens plane with respect to the DMD plane. This is also known as Scheimpflug's law. To solve this the lens plane must be placed parallel with the DMD plane. This can be achieved by turning the lens holder to remove the tilt (or swing) between lens plane and DMD plane (Lp3→Lp4).

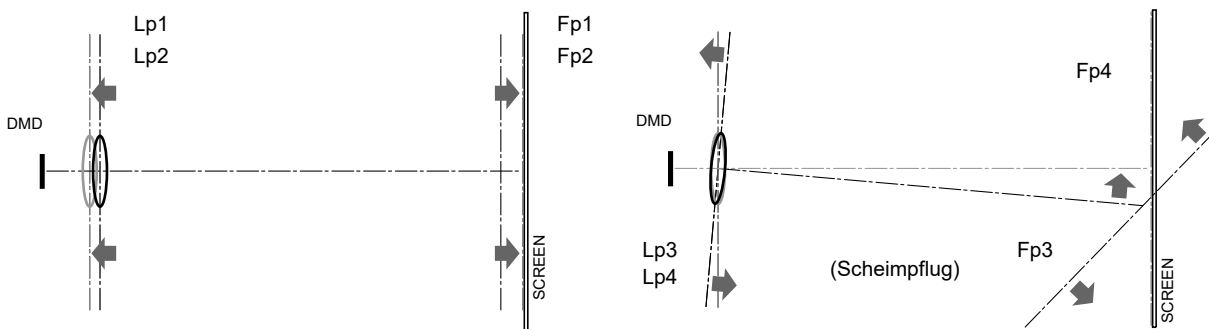


Image 3-6 Boresight (Scheimpflug) principle

Required tools

- Allen wrench 4 mm
- Boresight extenders
- Boresight L shape socket tool

Preparations

1. Choose the test pattern of the OSD. Switch to full screen mode.
2. Prepare the test area. Verify that the throw ratio of the installed lens matches the requirements of the installation area (projection distance and screen size).
3. Check that the lens is correctly installed.
4. Zoom the lens to its widest opening (maximum image size on the screen).
5. Adjust the focus control to search for the best sharpness of the projected image
6. Is this a lens with an floating ring? E.g., G lens (0.65 - 0.75 : 1)⁵.
 - ▶ If yes, adjust the floating ring of the lens (see next chapter).

Adjust floating ring G lens (0.65 - 0.75 : 1)⁵

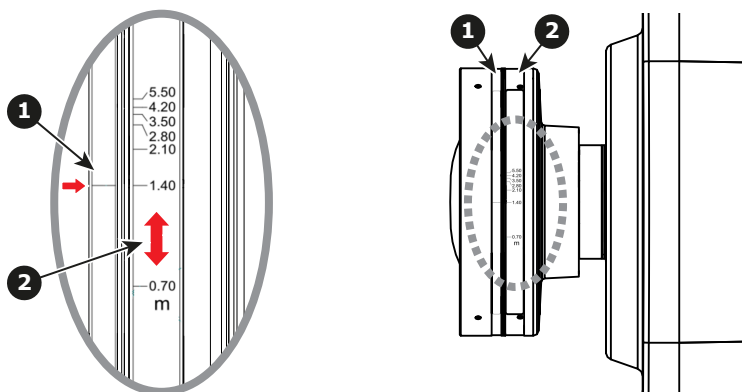


Image 3-7

5. Also applicable for the GC lens and GC+ lens in case these lenses are supported on this projector model.

- 1 Fixed ring
- 2 Floating ring

- Manual adjust the floating ring before adjust Zoom & Focus for better optical performance.
- Scale on floating ring shows the projection distance.
- The projection distance is from projector lens to screen.

Example:

When the distance between screen and projector lens is 1.4 meter, adjust floating ring scale to “1.40” to have better performance.



Special Boresight tools required for G lens (0.65 - 0.75 : 1)⁵. Tools are included in the box of the lens.

Boresight extenders (with red rubber ring), 3 pieces.



Boresight L shape socket tool.



Adjust Boresight

1. Is this a lens with an floating ring? E.g., G lens (0.65 - 0.75 : 1)⁵.
 - If yes, install the 3 Boresight extenders on the screws ① , ② and ③.
2. If zone C is in focus on the screen, please check the focal plane of zone A.
 - If clear position is just on the screen→ No need to adjust.
 - If clear position is out of the screen(close to projector), rotate screw ① CCW and then screw ②&③ CW for half amount that① rotated. → repeat until both A and C are clear. (e.g. turning ① CCW in a circle, then turn ②&③ CW in half circle).
 - If clear position is in the screen(far from projector), rotate screw ① CW and then screw ②&③ CCW for half amount that① rotated. → repeat until both A and C are clear.


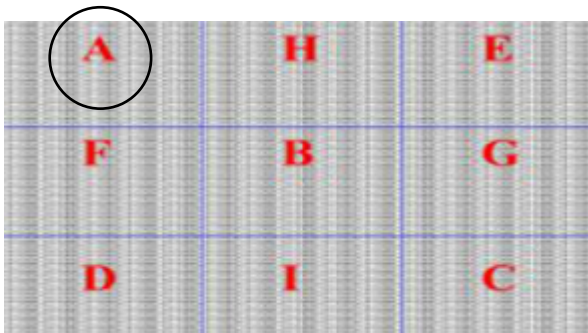


Image 3-8

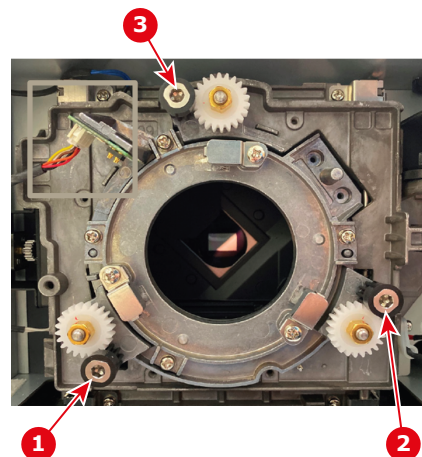

Note: This process may cause the other areas of the image to slide out of focus. This is totally normal.

3. If zone D is in focus on the screen, please check the focal plane of zone E.
 - If clear position is just on the screen→ No need to adjust.
 - If clear position is out of the screen(cloe to projector), rotate screw ② CCW and then screw ① &③ CW for half amount that ② rotated. → repeat until both D and E are clear. (e.g. turning ② CCW in a circle, then turn ① &③ CW in half circle)
 - If clear position is in the screen(far from projector), rotate screw ② CW and then screw ① &③ CCW for half amount that ② rotated. → repeat until both D and E are clear.


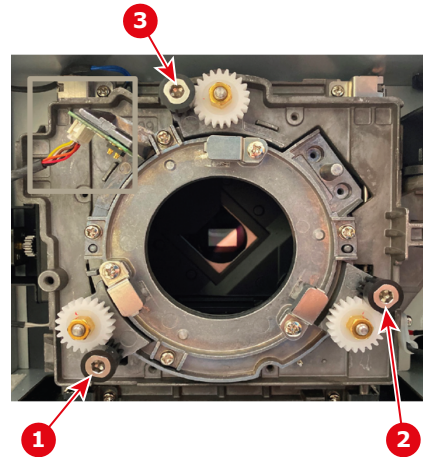


Image 3-9

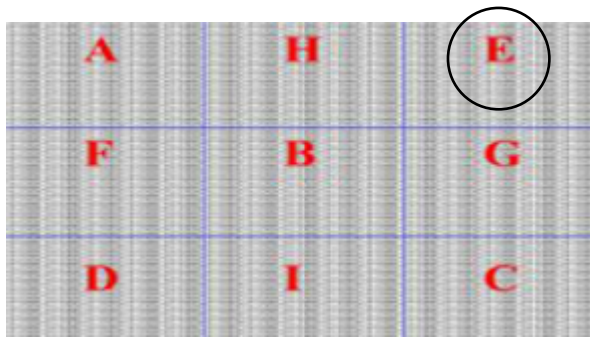

Note: This process may cause the other areas of the image to slide out of focus. This is totally normal.

4. If zone H is in focus on the screen, please check the focal plane of zone I.
 - If clear position is just on the screen → No need to adjust.
 - If clear position is out of the screen (close to projector), rotate screw ③ CCW and then screw ① & ② CW for half amount that ③ rotated. → repeat until both H and I are clear. (e.g. turning ③ CCW in a circle, then turn ① & ② CW in half circle).
 - If clear position is in the screen (far from projector), rotate screw ③ CW and then screw ① & ② CCW for half amount that ③ rotated. → repeat until both H and I are clear.


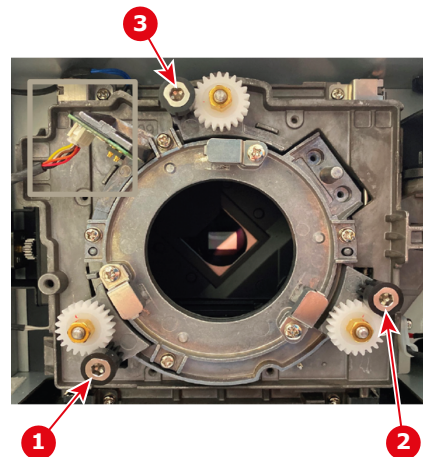


Image 3-10

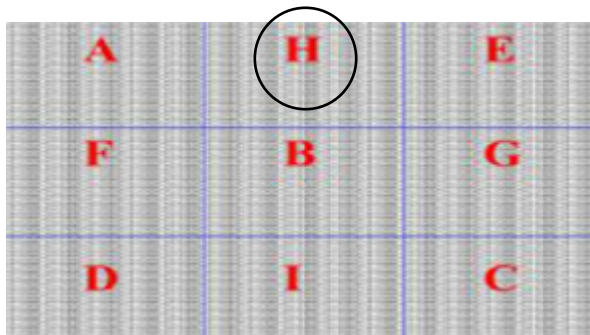

Note: This process may cause the other areas of the image to slide out of focus. This is totally normal.

5. After the above adjustment of the viewing axis, the projected image from zone A to zone I still cannot achieve a clear focus on the screen. Please turn the boresight screws ① to ③ counterclockwise to the end (STOP), and then turn clockwise 2 circles to the design value position. To improve the focus, go to step 2 and repeat the complete procedure.

3.6 Projector Address (ID)

About the projector address

The Remote Control supports individual addressing of multiple projectors. The remote receiver on the projector can be set with a specific number from 00 to 99, and the projector only responds to the IR remote set to the same number. The default ID code of the RCU (also known as the broadcast address) is 00. This specific address allows the RCU to control all projectors within its effective range.

How to set the projector address on the RCU

1. Keep **ID Key** pressed in.
2. After few seconds, enter the address with the numeric keys while keeping the **ID Key** pressed in.



Tip: Always enter two digits. E.g. for address 2, enter 02.

3. Release the **ID Key**.



The projector address can be set in: *Communication > Remote setup > Remote code*.

3.7 Using the RCU

Effective range

The Infrared (IR) remote control sensors are located on the front and top sides of the projector. To have the remote control functions correctly, make sure of the following:

- The maximum range between the remote control and the sensor is 30 m (98.4 ft).
- Ensure to hold the remote at the following angles towards one of the IR remote control sensors:
 - horizontally: $\pm 30^\circ$
 - vertically: $\pm 20^\circ$
- Make sure there are no obstacles between the remote control and the IR sensors on the projector.
- Make sure the IR transmitter of the remote control is not directly being shined by sunlight or fluorescent lamps.
- Keep a minimum distance of 2 m between the remote control and nearby fluorescent lamps. If not, the RCU might malfunction.
- If the projector and remote are within very short distance, the RCU may become ineffective.
- When you aim at the screen, the effective distance is less than 5 m from the remote control to the screen and reflecting the IR beams back to the projector. However, the effective range might change depending on type of screen used.

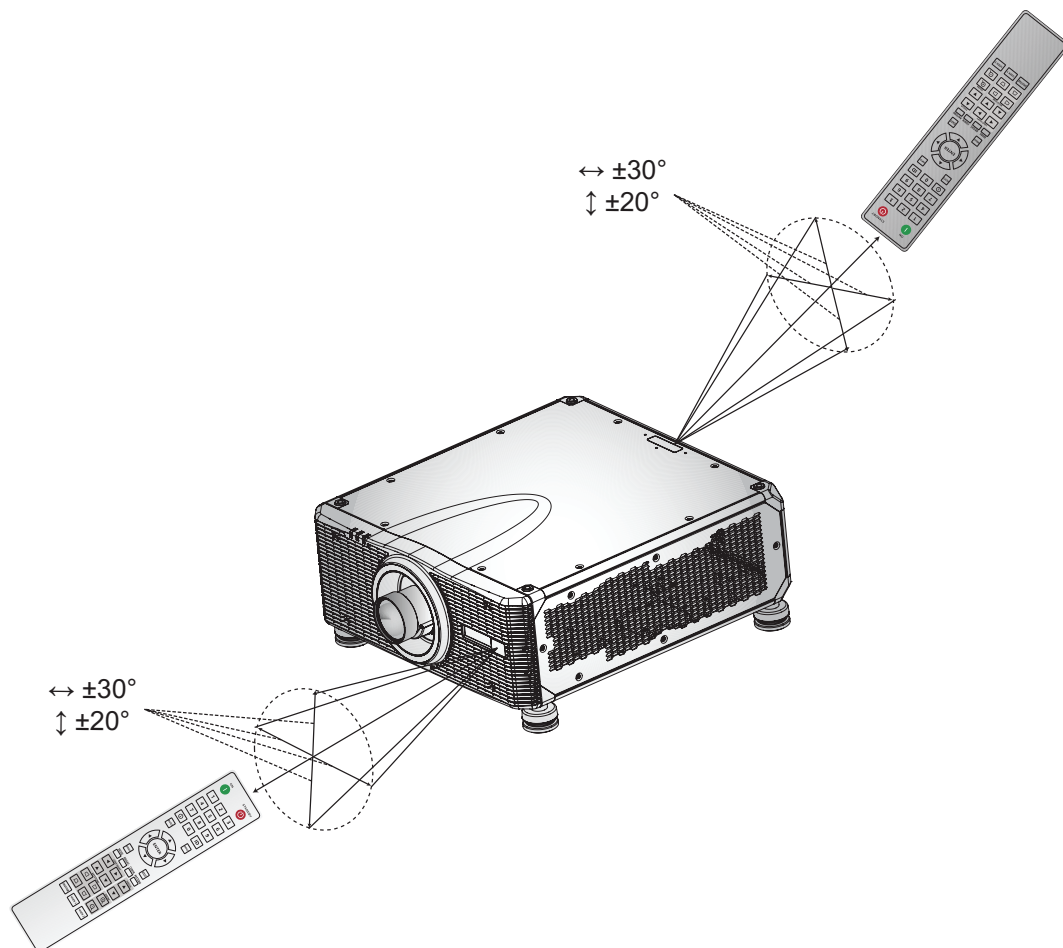


Image 3-11

3.8 Software update



CAUTION: Do not power off or unplug the projector while the software update is ongoing. Similarly, do not remove the USB flash drive while the software update is ongoing.

How to update the software using the web interface.

1. Power on the projector.
2. Download the latest firmware file (format .iso) from Barco's website. The firmware can be downloaded for free from Barco's website, (URL: <http://www.barco.com>). Click on *myBarco* and log in to get access to secured information. Registration is necessary.

If you are not yet registered, click on *New to myBarco* and follow the instructions. With the created login and password, it is possible to log in where you can download the software.

3. Connect your computer to the projector, using a LAN cable.
4. Browse to the IP address of the projector (e.g. the default 192.168.1.100).

The login screen will be displayed.

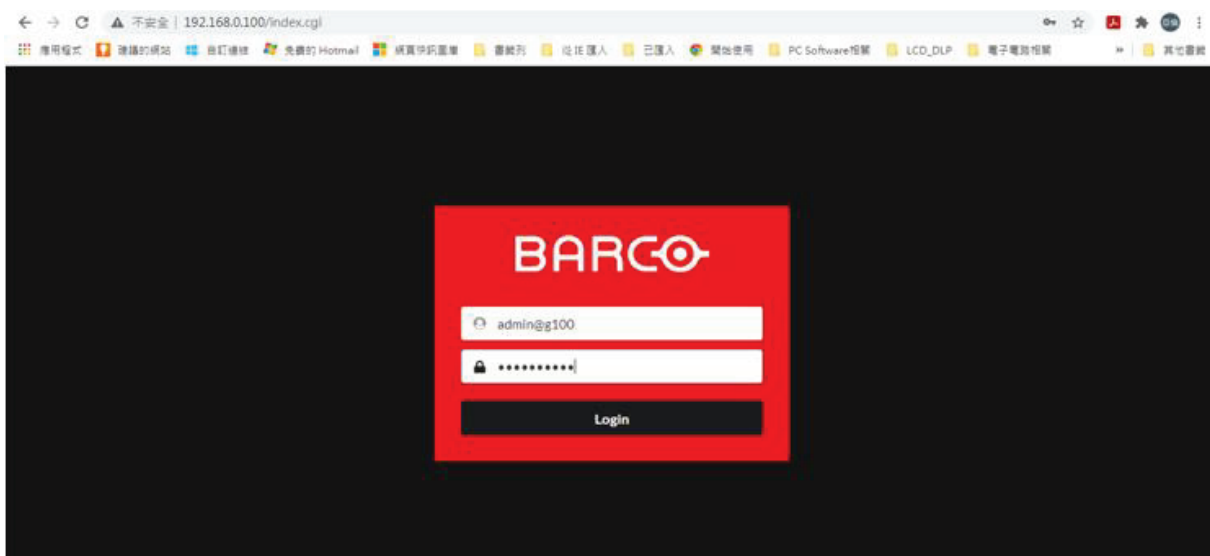


Image 3–12 Example of the login page

5. Log in, using the following (default) settings:
 - Username: admin@g100
 - password: admin@g100



Tip: It is advised to change the username and password once you have logged in. It is also advised to use a strong password.

6. Navigate to System Settings > Upgrade (reference 1).

The upgrade page will be displayed.

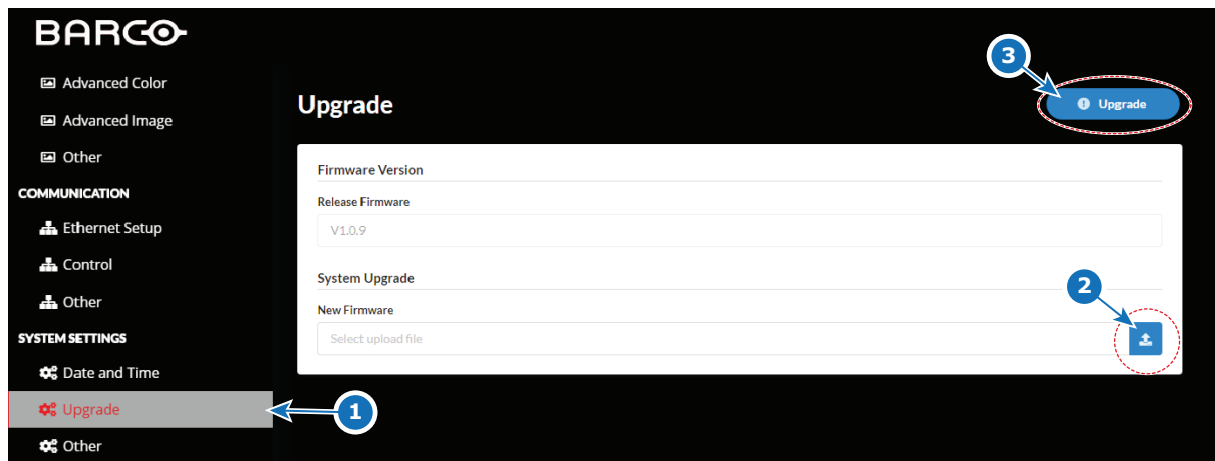


Image 3–13 Example of the upgrade page

7. Browse to the desired update package (format .iso) and confirm (reference 2). Click **Upgrade** (reference 3) to start the upgrade process.

The update file will be transferred to the projector and installed. The projector will reboot when completed.




Once initiated, the update procedure can take up to 20 minutes to complete. During this process the projector will reboot at least once.
The LCD display will show the current status of the update during the update process.

3.9 Creating a backup

How to create a backup.

1. Power on the projector.
2. Connect your computer to the projector, using a LAN cable.
3. Browse to the IP address of the projector via a browser of choice.

 **Tip:** Default IP address is 192.168.1.100

The login screen will be displayed.

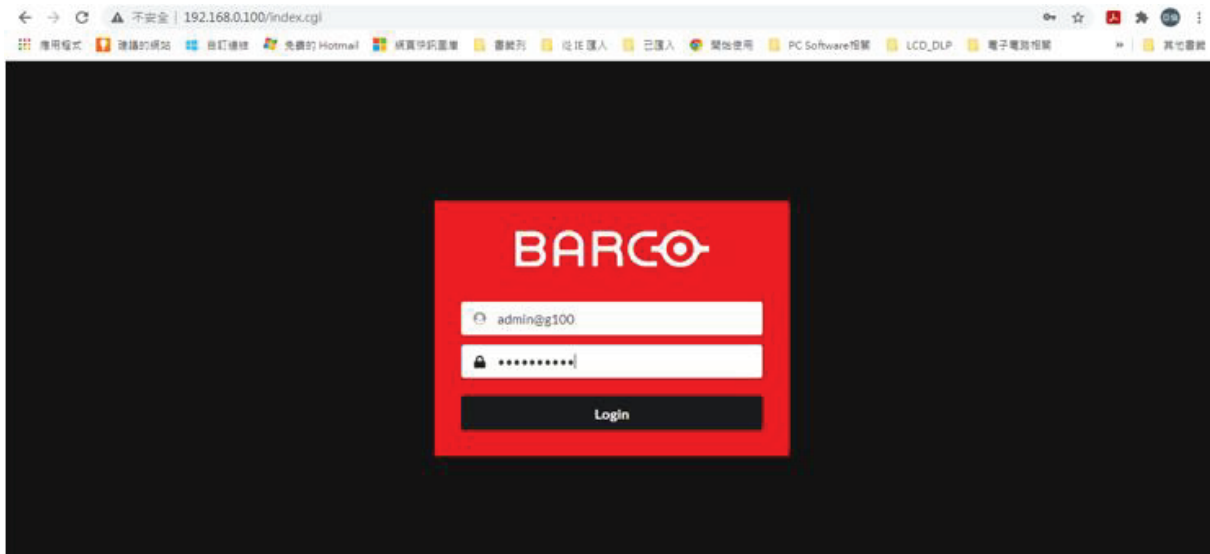



Image 3–14 Example of the login page

4. Log in as Admin.

 **Tip:** Default username and password is admin@g100

5. Navigate to the “Service” tab under “SYSTEM”. (reference 1)

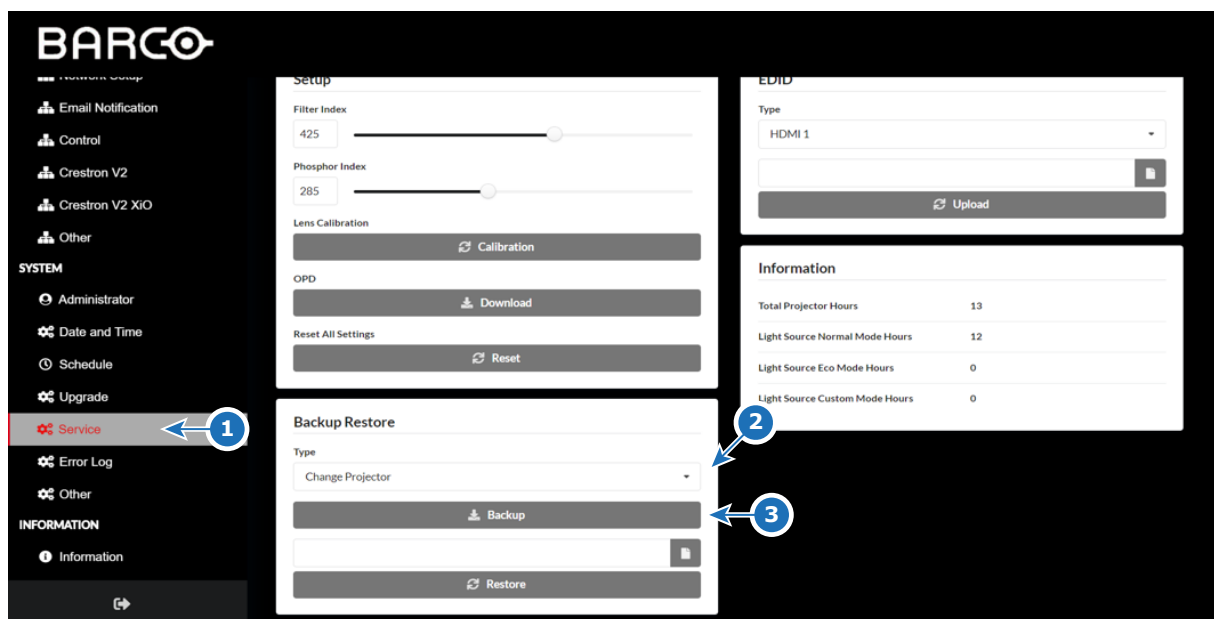


Image 3–15 Example of the Backup Restore page

6. Select the desired backup type from the drop-down menu “Type” in the “Backup Restore” category (reference 2).



Note: Extra info about the types of backups:


Type	Setting	Included
Normal	Geometry Correction current settings	NO
	Adjustments related to Grid Points	NO
	Geometry Correction Memory	NO
	Lens Memory	NO
	Serial Number	NO
Change Projector	Geometry Correction current settings	YES
	Adjustments related to Grid Points	NO
	Geometry Correction Memory	NO
	Lens Memory	NO
	Serial Number	NO
Change Main Board	(NOT SUPPORTED)	

7. Click the “Backup” button (reference 3) to generate the backup file.

3.10 Restoring a backup

How to restore a backup.

1. Power on the projector.
2. Connect your computer to the projector, using a LAN cable.
3. Browse to the IP address of the projector via a browser of choice.

 **Tip:** Default IP address is 192.168.1.100

The login screen will be displayed.

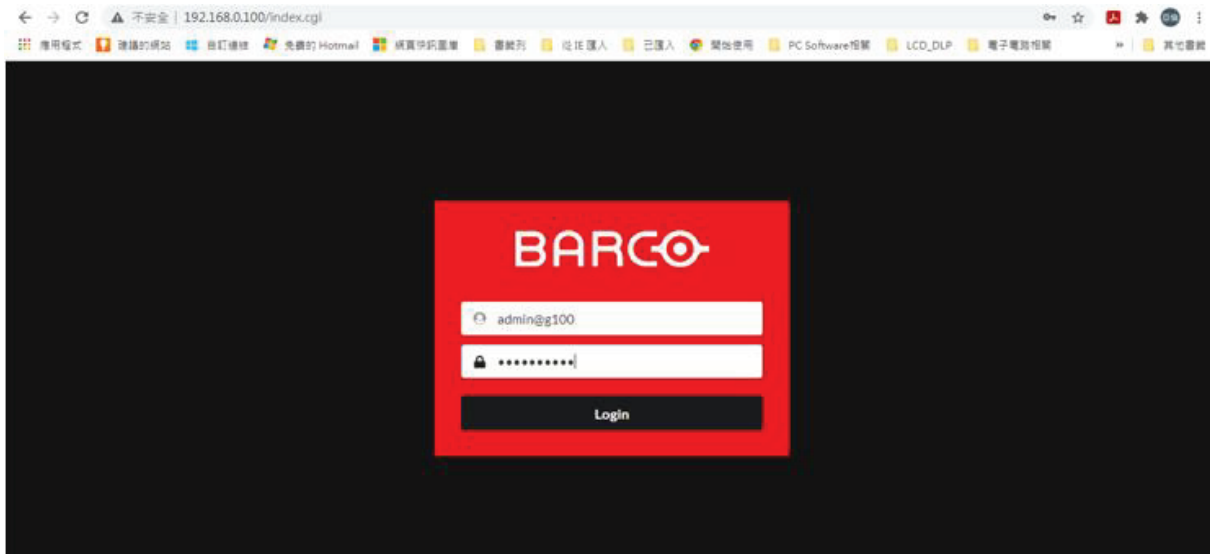



Image 3–16 Example of the login page

4. Log in as Admin.

 **Tip:** Default username and password is admin@g100

5. Navigate to the “Service” tab under “SYSTEM”. (reference 1)

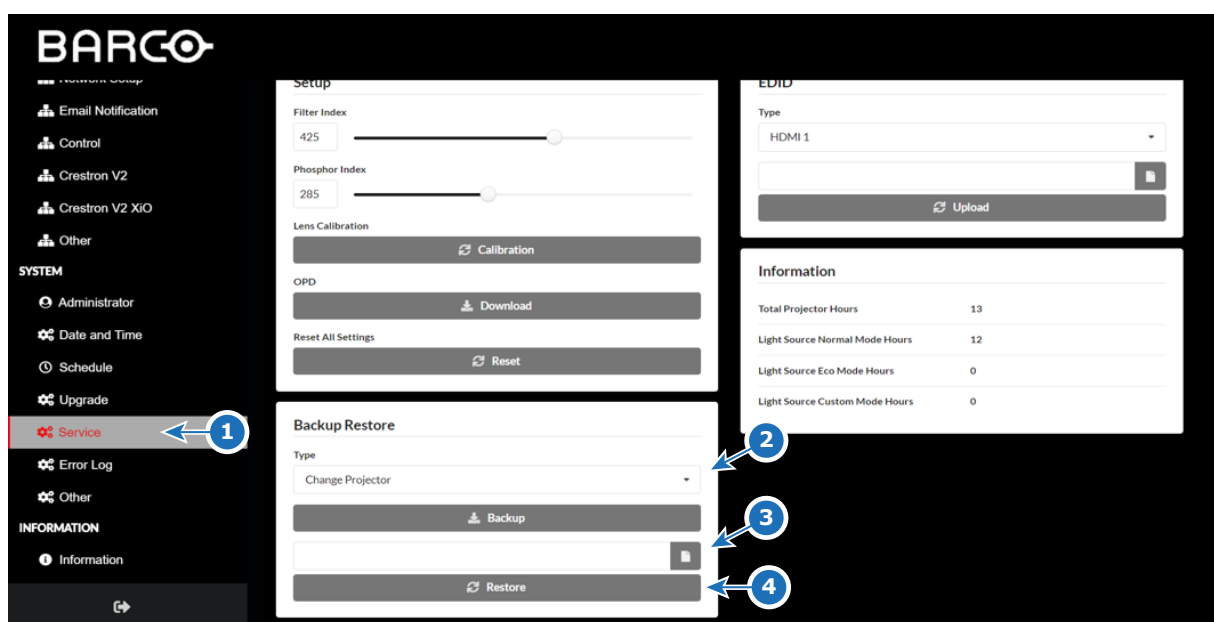


Image 3–17 Example of the Backup Restore page

6. Select the type, that was used to create the backup, in the “Type” drop-down menu of the “Backup Restore” category (reference 2).



Note: No settings will be restored from the backup if the selected “Type” is incorrect.

7. Click on the upload file icon (reference 3) and navigate to the desired backup file via the pop-up.
8. Click on the “Restore” button (reference 4) to import the backup.



Note: For the backup type “Change Projector” a **reboot** will be required to apply the imported “Geometry Correction” settings.

Powering on/off the projector

4

4.1	Powering on the projector.....	60
4.2	Powering off the projector.....	62

4.1 Powering on the projector

How to power on the projector

1. Power on the AC switch (1) and wait until the power button on the control panel is solid orange.

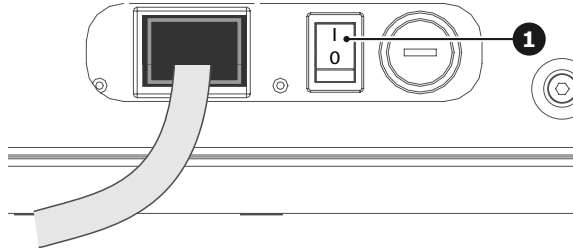


Image 4-1

2. Turn on the projector by pressing the POWER button (2) on the control panel or the ON key (3) on the remote control.

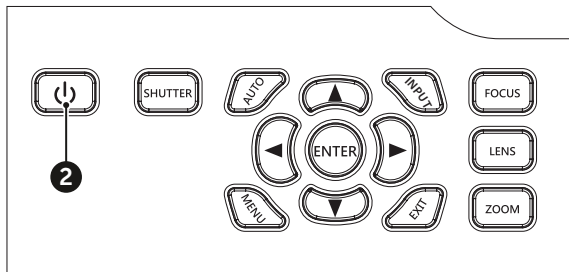


Image 4-2

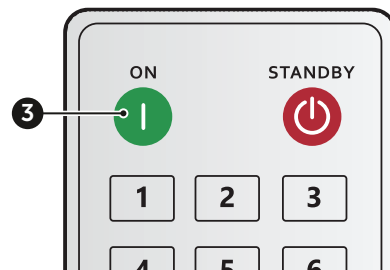


Image 4-3

The status LED (4) will flash orange. The startup screen will display and the status LED will turn to solid green.

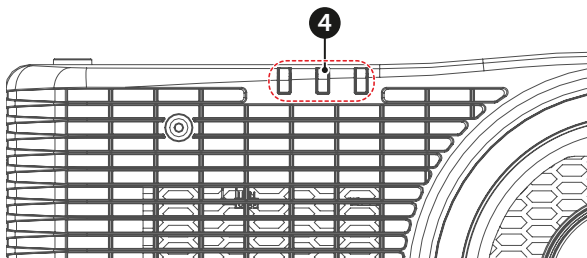


Image 4-4


3. Is this the first time that the projector starts up? (First installation or after a factory reset)
▶ If yes, a popup window appears with the request to accept Barco's End User License Agreement (EULA). Select CONTINUE to accept the EULA terms and to proceed using the projector. If you do not accept the EULA terms (CANCEL), the projector will be switched off.




Note: Use the remote control or control panel to select your choice.



Image 4-5

 *Note:* The [EULA](#) can be downloaded from the Barco website.

4. Turn on your source. The projector detects the source you selected and displays the image.

 *Note:* If you connect multiple input sources at the same time, press the **Input** key on the control panel or on the remote control to switch inputs.



If this is the first time you powered up the projector, you will be prompted to select the projector language, projector orientation and other basic settings.



WARNING: Do not look directly into the lens when the projector is on. The strong light may cause permanent eye damage.

4.2 Powering off the projector

How to power the projector off

1. Press the POWER button (2) on the control panel or the OFF key (5) on the remote control.
A message will be prompted on screen to confirm if you want to turn off the projector.
2. Press the POWER button or OFF key again to confirm. If not, the message will disappear after 10 seconds and the projector will remain on.
The projector will go to standby mode.
3. Once the projector has entered standby mode and you want to turn the projector off completely, power off the AC switch.



Tip: If you still plan to use the projector in the foreseeable future, it is recommended to keep the projector in standby mode. Only turn off the projector completely if you want to physically move the projector, or if you do not plan on using the projector for the foreseeable future.



CAUTION: It is not recommended to turn the projector on immediately after powering off the projector.

FLDX lens (0.38 : 1) UST 90°

5

5.1	About the UST lens.....	64
5.2	Parts indication.....	66
5.3	Adapting the lens for the projecting position	67
5.4	Mounting the lens adapter	69
5.5	When mounting the lens without the support.....	71
5.6	Mounting the UST lens.....	72
5.7	Lens adjustment.....	76



CAUTION: When mounting the lens without the support, **always** use a safety cable as shown in the image.

5.1 About the UST lens

Possible mounting positions

This lens can be mounted on the G100 series of projectors and can be mounted in two positions: facing upwards and to the left. The motor housing must be turned to the correct position before the lens is mounted in the projector.

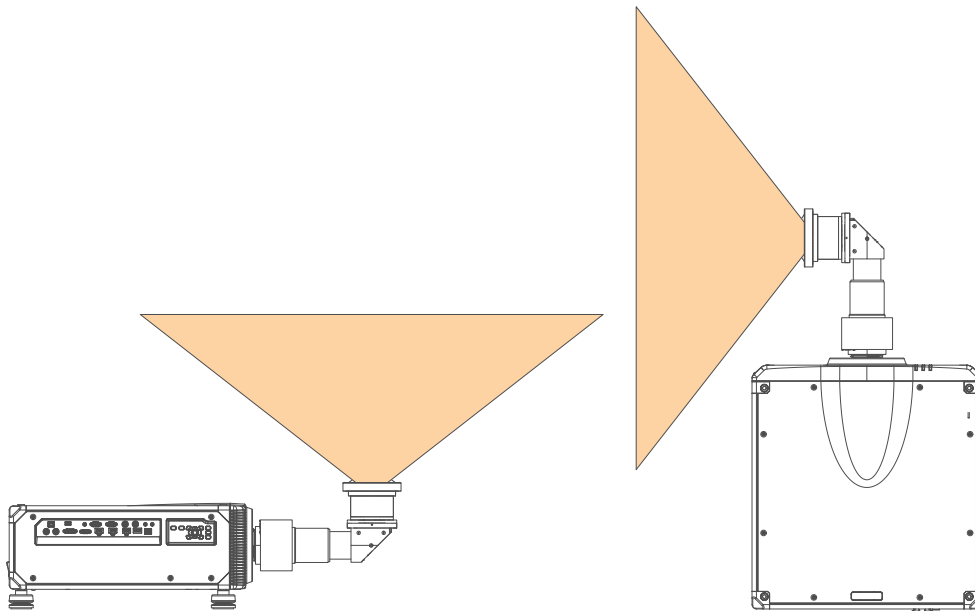


Image 5-1

How your image is displayed

Projection to the side for any projector:


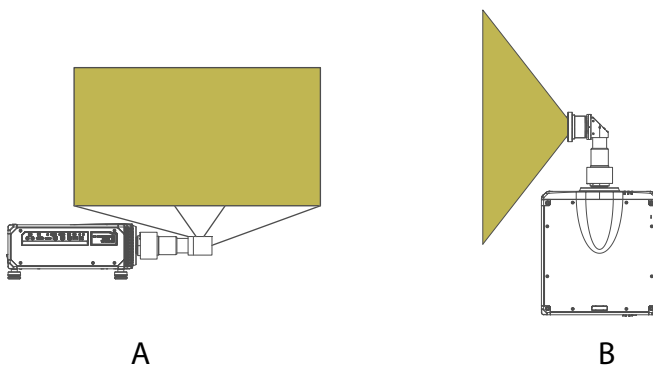


Image 5-2

- A** Side view
- B** Top view


Up projection for any projector:

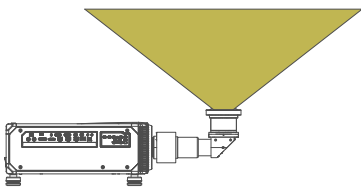

C

Image 5-3

C Side view

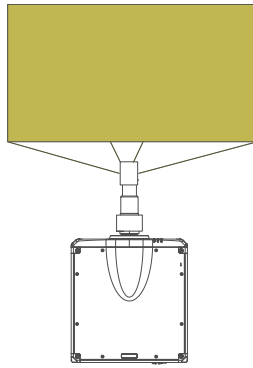

D

D Bottom view

5.2 Parts indication

UST Lens adapter kit

The UST lens adapter kit for the G100 includes an adapter cover, hook and 7 hex screws. The cover and hook slide into each other as depicted in the following illustration.

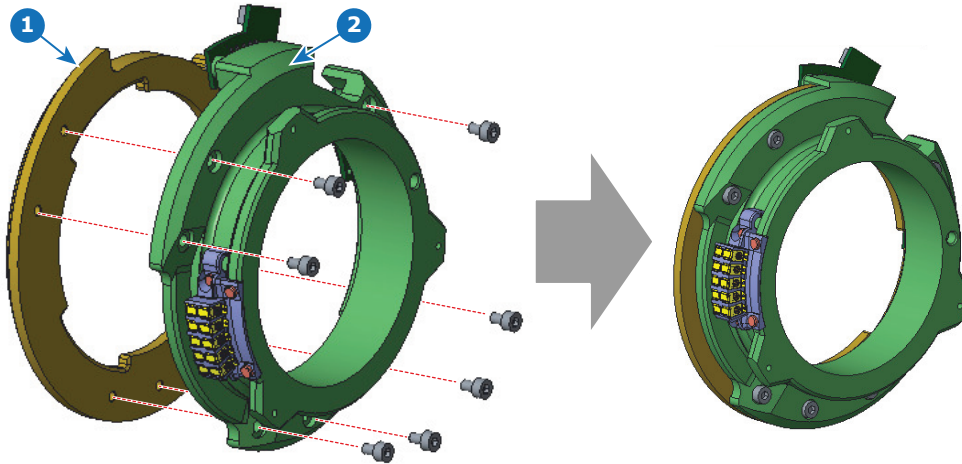


Image 5-4

- 1 UST-adapter cover
- 2 UST-adapter hook

Lens support frame kit

The UST lens support kit for the G100 includes 3 mechanical parts and some screws. These parts are the following:

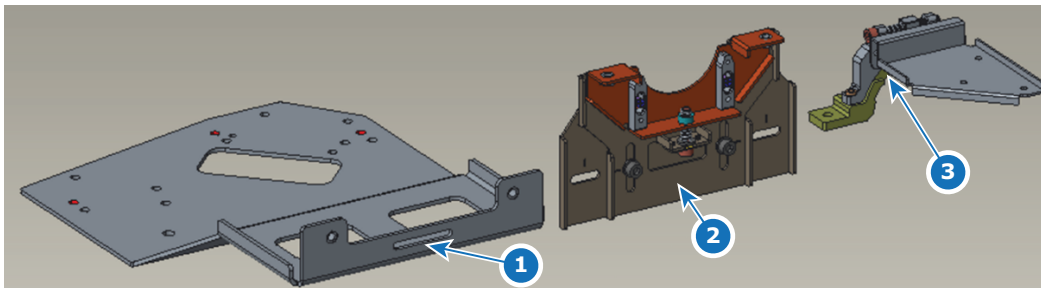


Image 5-5

- 1 Base plate
- 2 Lens holder module
- 3 Lens clamp module

5.3 Adapting the lens for the projecting position

Required tools

Allen wrench with long shaft 2 mm

How to adapt

1. Place the lens on a table. Turn out the 6 screws (1). Use an Allen key with a long shaft so that you do not damage the screw head. These screws will not be reused.


 **Note:** Always use the correct tool (delivered with the kit) to avoid damage to the screw heads !



Image 5-6

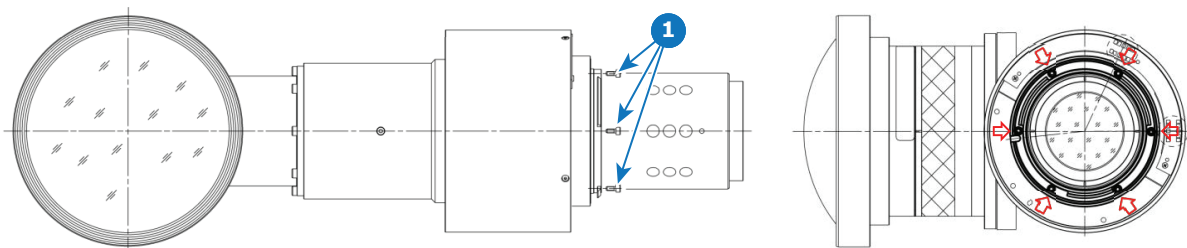


Image 5-7

2. Slide the motor housing a few mm to the backside of the lens (2) to disengage focusing gear and motor gear.

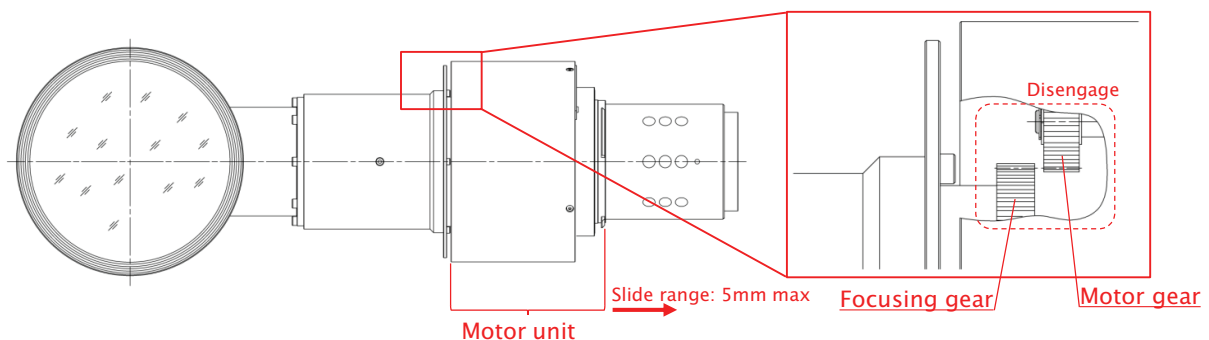


Image 5-8

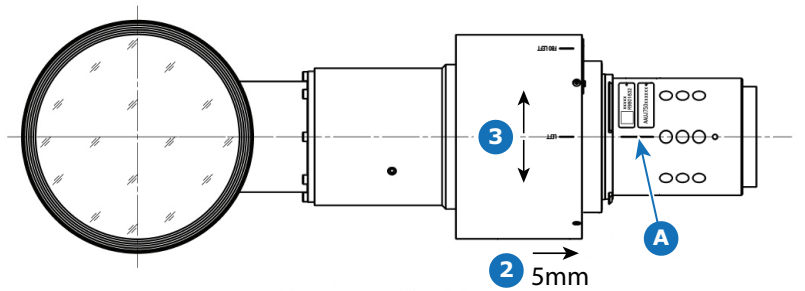


Image 5–9

A reference marking

3. Rotate the motor housing until the chosen marker on the housing corresponds with the reference marking on the lens body (steps of 30°). See if the mounting holes matches the holes in the lens body.

E.g. if you want to project to the left, then turn the motor housing until the left marking on the motor housing corresponds with the reference marking on the lens housing.



A



B



C

Image 5–10

- A** Project LEFT
- B** Project RIGHT (not used on G100)
- C** Project UP

4. Slide the motor housing back to the front of the lens to re-engage focusing gear and motor gear.
5. Drive in 6 **new** Allen screws with glue (screws are delivered with the kit). These screws can be multiple times reused. The turned out old screws can be thrown away.

Use again a tool with a long shaft (Allen wrench 2 mm, delivered with the kit).

The lens is ready to be mounted on the projector.

5.4 Mounting the lens adapter

How to mount

1. Slide the UST-adapter-hook onto the lens input side until it matches the bayonet flang.
2. Secure the adapter hook by turning it clockwise (bayonet fitting).

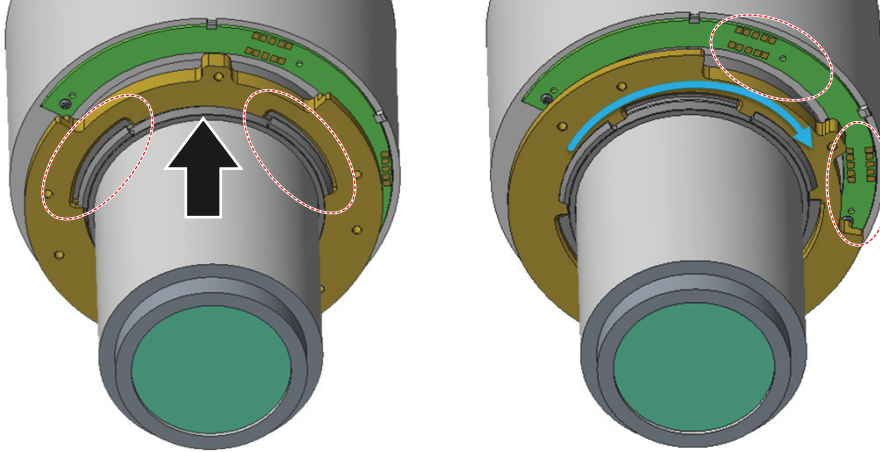


Image 5–11



Tip: Make sure that the contact points (C) of the lens are not covered by the adapter hook.



Image 5–12

C Contact points

3. Slide the UST-adapter cover onto the lens input and over the adapter hook as illustrated. Make sure the contact points of the cover touch the contact points of the lens.
4. Fasten the adapter cover and hook, using the 7 hex screws provided in the kit.

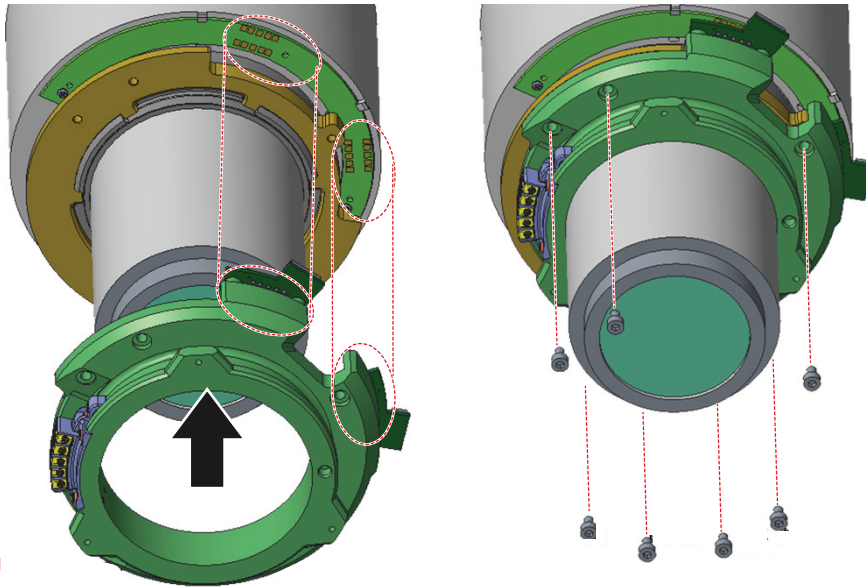


Image 5–13

5.5 When mounting the lens without the support

When to use the safety cable

While it is strongly recommended to use the specifically designed mounting support for this lens in combination with this lens, it is not mandatory.

When mounting the UST lens in a projector without using the mounting support (not recommended), the safety cable set provided by Barco must be installed. Failing to use either the correct type of safety cable or the mounting support may damage the lens and/or projector.

How to prepare the lens with the safety cable

1. Stick 3 to 4 clips on the surface of the lens body (1).
2. Snap the first loop end of the safety cable into one of the clips.

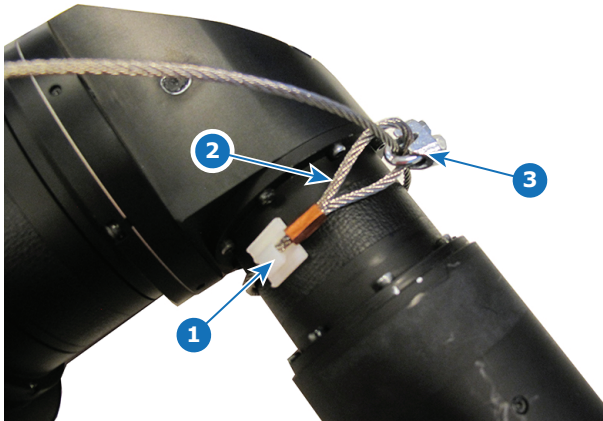


Image 5-14

3. Slide the rest of the cable around the lens. Click the cable into every clip it passes in the loop.
4. Slide the cable through the loop end at the beginning of the cable (2).
5. Install an U-bolt on the lens holder with the open ends oriented outwards (3). Make sure that both a part of the loop end and the outgoing part of the safety cable are placed in the enclosure.
6. Close the U-bolt and tighten it.



Note: Make sure the safety cable is tightened around the lens before tightening the U-bolt nuts.

7. Place the shackle through the free loop end of the safety cable.
8. Mount the lens in the projector.
9. Secure the safety cable around the truss and secure the shackle by turning the safety ring of the shackle over the open end.

5.6 Mounting the UST lens



It is not recommended to use the UST lens in a dual setup when the projectors are mounted in their rigging frame.

Required tools

- Allen wrench 5 mm
- Allen wrench 3 mm

Required parts

- Base plate
- Lens holder module
- Lens clamp module
- Hex screws M6 (x3)

How to mount?

1. Turn the projector on its top cover.
2. Place the bottom support plate on the bottom plate of the projector as illustrated. Make sure that the fixation holes match the holes in the bottom plate.

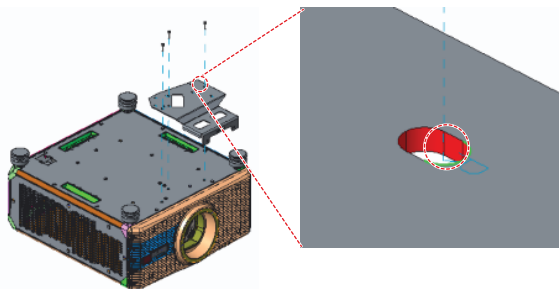


Image 5–15 Mount bottom plate on the front side of the projector



Tip: The blue circle is the ideal screw location

3. Drive in the three M6 screws. Use a 5 mm Allen wrench.
4. Turn the projector back on its feet.



Note: If the projector is to be mounted in the rigging frame, do this first. For more information, see the installation manual of the G100.

5. Carefully insert the lens into the lens holder.

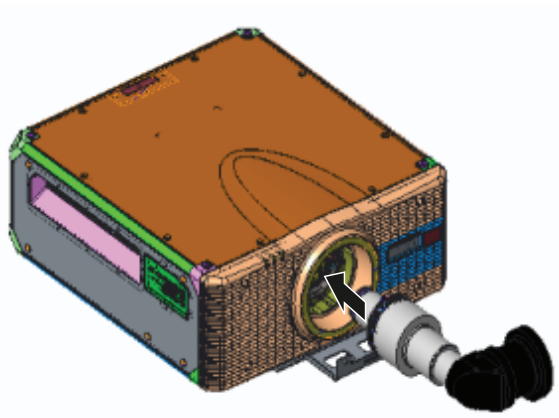


Image 5–16

6. Slide the lens holder module onto the base plate.
7. Drive in the screws partially, but do not fasten yet! It must be possible to move the plate a little bit while mounting the other plates.

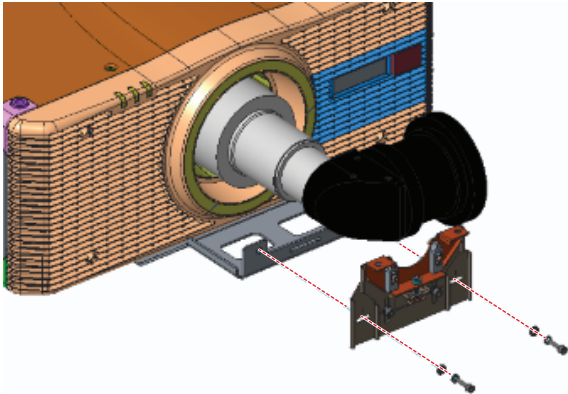


Image 5-17

8. Mount the lens clamp module onto the lens holder module, using screws and washers..

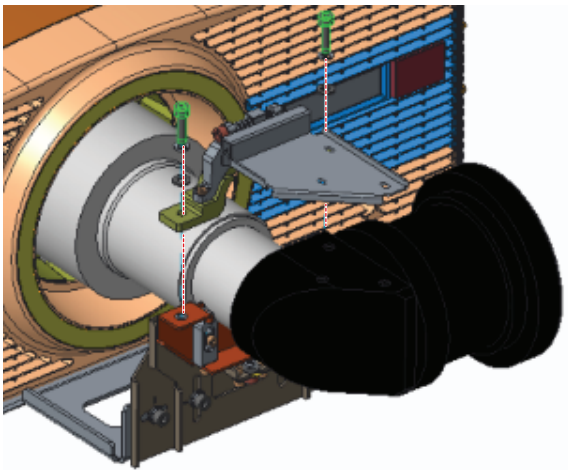


Image 5-18



Tip: Adapt the lens clamp module, depending on how the lens has been mounted. If the lens points to the left, use the full lens clamp. If the lens points upward, only use the bottom part.

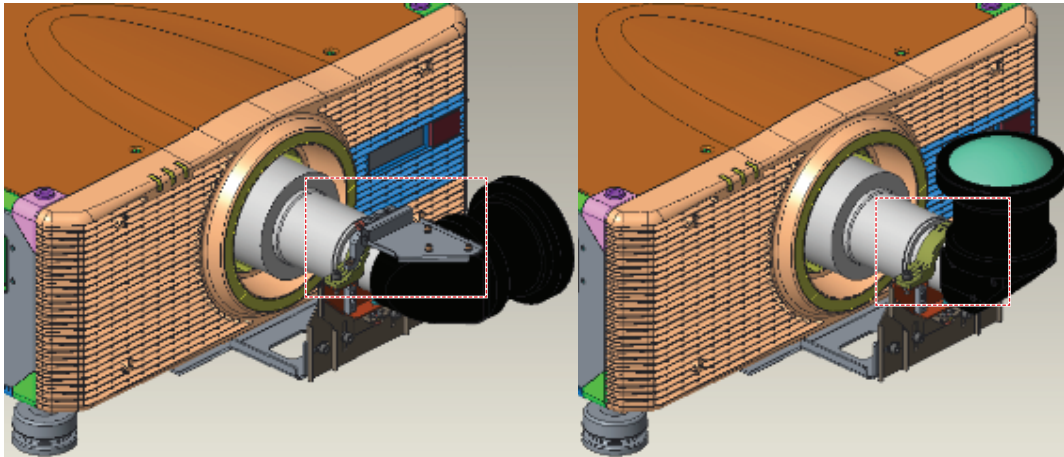


Image 5-19

Use a 3 mm Allen wrench to release the 3 screws holding the parts together

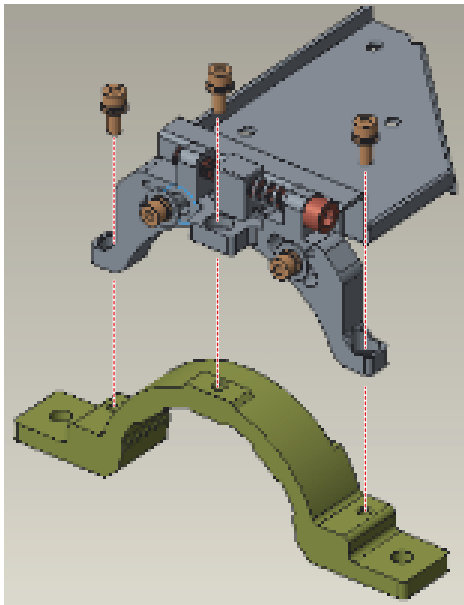


Image 5-20

- 9.** In the case the lens points to the left side of the projector, you can also secure the lens and adapter plate with 3 hex screws.

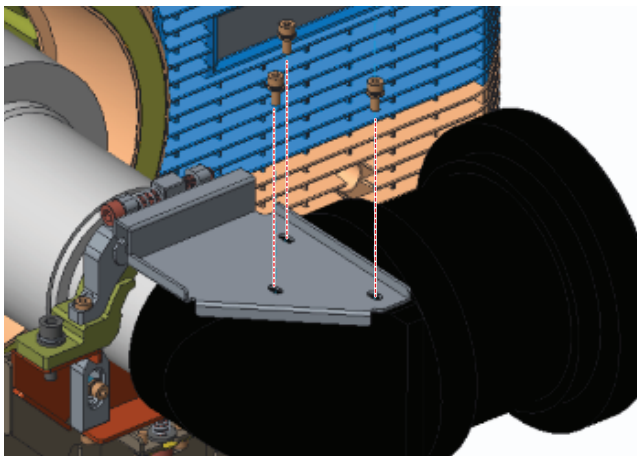


Image 5-21

10. Is the projector installed above the head of people?

- ▶ If yes, install the lens safety cable. See chapter [“Lens safety cable installation”](#), page 47.

5.7 Lens adjustment

Read this first when using the UST lens with the G100 rigging frame (R9802681)



It is not recommended to use the UST lens in a dual setup when the projectors are mounted in their rigging frame.

- When the UST lens is combined with the G100 rigging frame (R9802681), a minimum lens shift is required to avoid shadows.
- Relative to the center position the lens needs to be shifted upwards by a minimum of 10%, and to the right by a minimum of 25%. (100% = half the image height/width)
- The removable front bar of the frame should also be removed. For how to remove this bar, see documentation which is included in the packing of rigging frame.

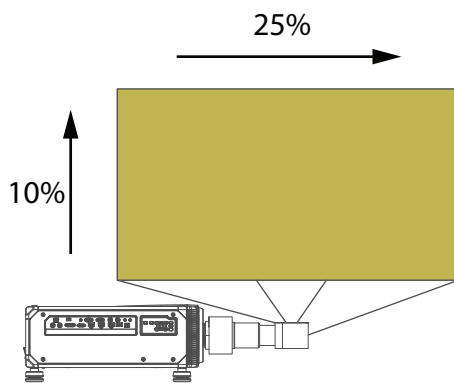


Image 5–22



CAUTION: When lens shift has to be used, loosen screws 1, 2, 3 and 4 ([Image 5–23](#)) before starting with this lens shift and that to avoid damage to the shift motors and lens holder.

Location of the adjustment screws

Before adjusting the lens, make sure that screws 1–4 on the adapter are not tightened, and that screws 5 and 6 are in mid position.


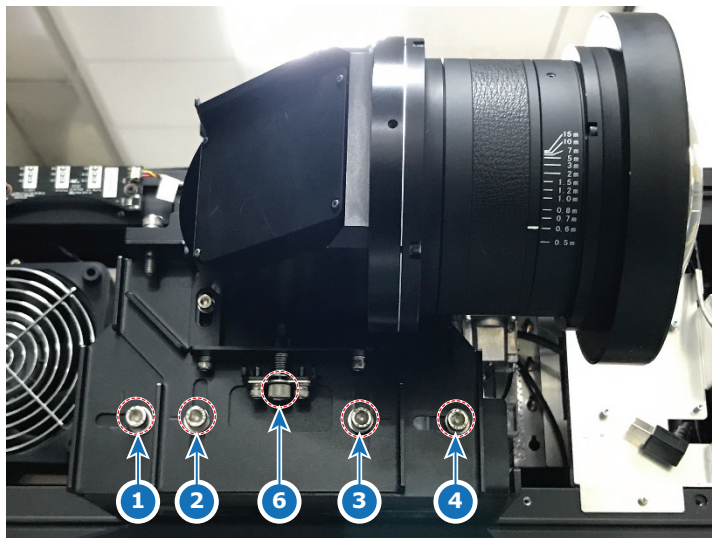


Image 5–23

- 1 Screw for horizontal shifting
- 2 Screw for vertical shifting
- 3 Screw for vertical shifting

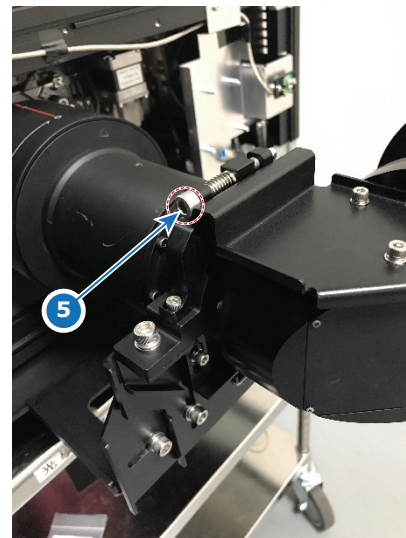

- 4 Screw for horizontal shifting
- 5 Tilt adjustment screw
- 6 Focus adjustment screw

How to adjust the lens

1. Shift the lens to the desired position as much as possible using the lens holder and software. Adjust with hand if necessary.

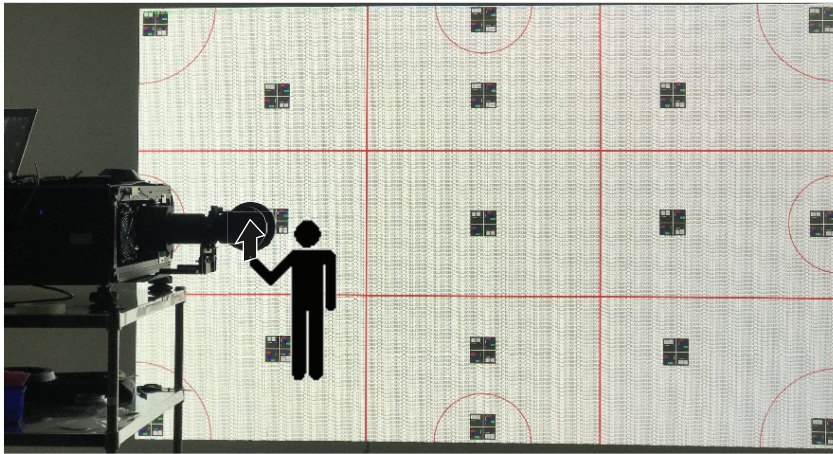


Image 5-24

2. Once the desired position has been reached, tighten the vertical shifting screws (2 and 3).
3. Fine-tune the tilt of the projected image, using screw 5. Using this method, you can adjust $\pm 7.5^\circ$.

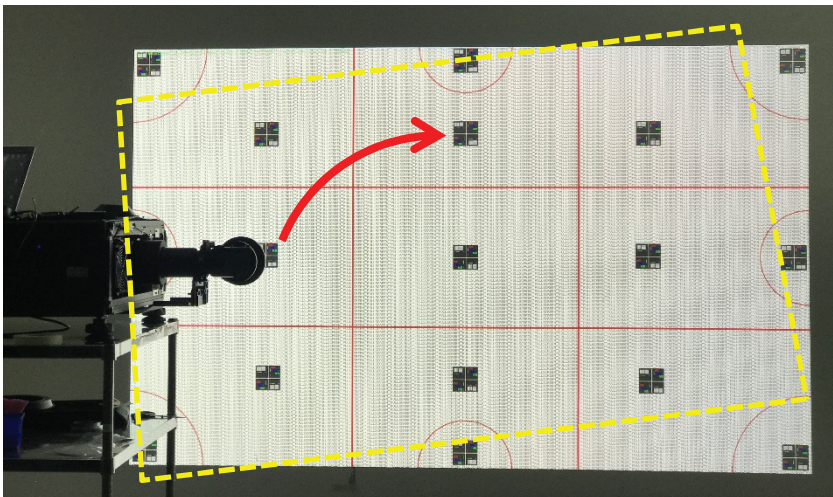


Image 5-25



Tip: Turning screw 5 clockwise will tilt the image counterclockwise. Turning the screws counterclockwise will tilt the image clockwise.

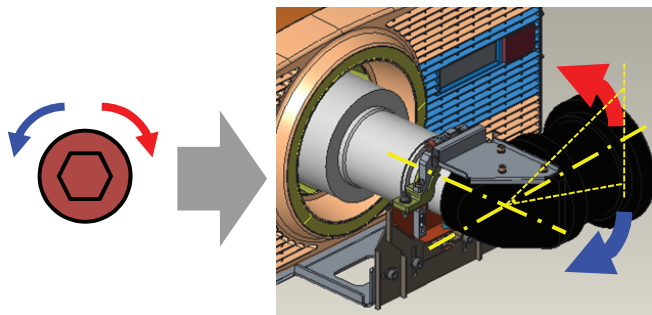


Image 5-26

4. Fine-tune the focus of the projected image vertically, using points A and B on the following image as reference points. The resolution/balance between both points should be the same.
 - Use the focus software feature to help focus the image.
 - Use adjustment screw 6 to help focus the image.

- Use the focus ring at the end of the lens to help focus the image.
- If necessary, loosen screws 2 and 3 a bit to push the lens a bit upward or downward to spot any variation in image quality.

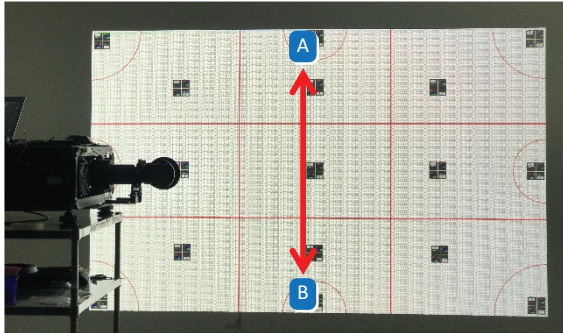


Image 5-27

5. Fine-tune the focus of the projected image horizontally, using points C and D on the following image as reference points. The resolution / balance between both points should be the same.
- If the balance is a bit off, gently move the lens horizontally to see if this makes any difference.
 - Use the focus ring at the end of the lens to help focus the image.

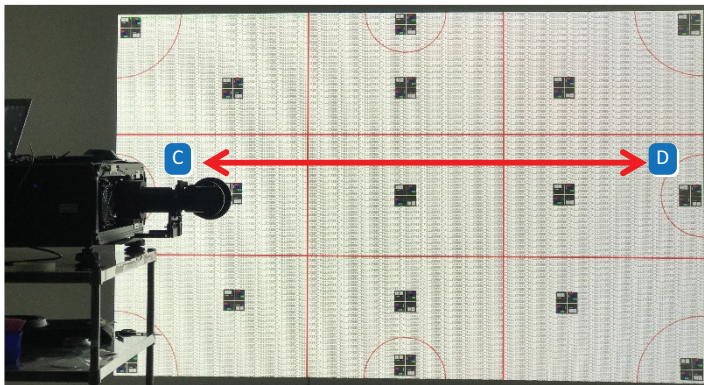


Image 5-28

6. Once shift, tilt and focus is all as desired, tighten adjustment screws 1 – 4.
7. Have a final check, using the focus feature and the focus ring of the lens. Repeat all previous steps if the end result is not as desired.

Dimensional drawings

A

A.1	Dimensions of the projector	80
A.2	Ceiling mount information.....	81

A.1 Dimensions of the projector

Overview

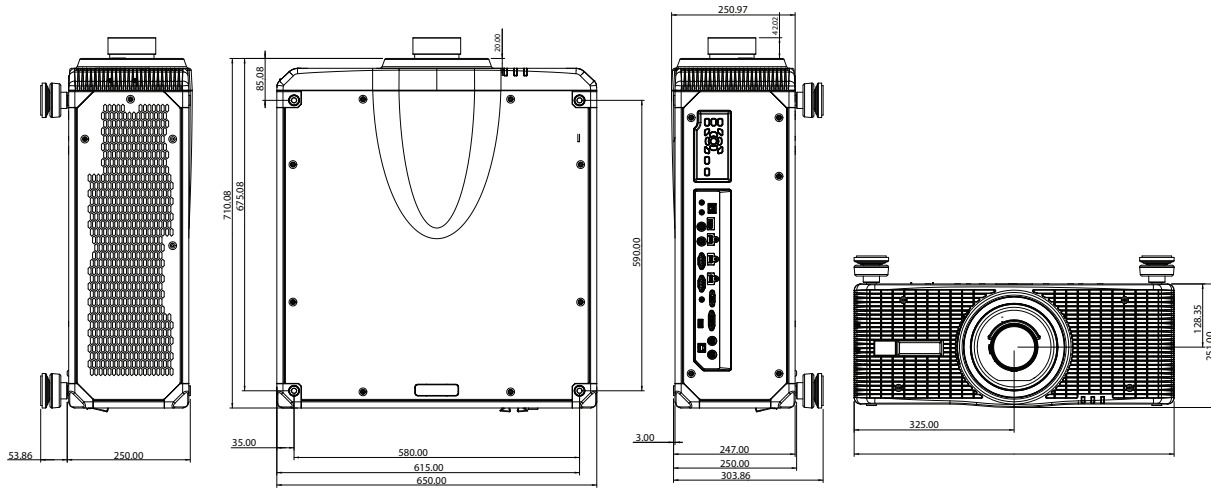


Image A-1

A.2 Ceiling mount information

Projector dimensions

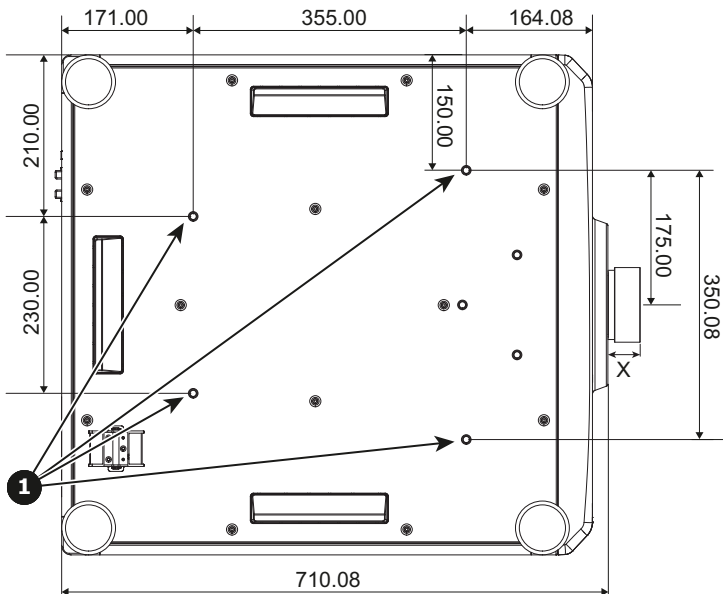


Image A-2 All dimensions given in mm

- 1** Mounting holes for ceiling mount
X Distance between projector and end of lens

Lens type	Distance X (in mm)
R9802181	53.12
R9802182	56.42
R9802183	56.79
R9802184	42.02
R9802185	76.23
R9802186	106.9
R9802187	143.32
R9802188	82.94
R9801832	257.14
R9803362	55.57
R9803365	70.97

Rigging frame

For installation instructions, refer to the dedicated installation manual of the used rigging frame.

Index

B

Backup 55
Boresight
 Adjustment 48
Box content 26

C

Ceiling mount 81
Compliance 21
Control panel 31
Cooling requirements 24

D

Dimensions 81
 Projector 80
Download
 Product manual 22
 Projector Toolset 41

E

Electrical shock 10
Enclosed projection 18

F

Fire hazard 11

G

General considerations 8

H

Hazard Distance 16, 18
 Modifying optics 19

Multi-projector 20
Projector stacks 20
Hazardous Chemicals 13
High Brightness precautions 16

I

ID 51
Info tri 21
Initial inspection
 Box content 26
Input/Output 30
Install
 Safety cable 47
Install
 Lens 46
 Procedures 43
Installation preparations 23
Installation requirements 24
Instructions
 Safety 10

L

Lens
 adjustment 76
 Boresight
 Adjustment 48
 Overview 64
 Preparation 67
 Safety cable 47
 Scheimpflug
 Adjustment 48
Lens adapter
 Mount 69
Lens offset 39
Lens selection 34
Lens specifications 36
Lenses 35
 Lens selection 34

M

Mechanical check 26
Mounting
 Lens 72
 Safety cable 71

N

Notice
 Optical radiation 8
Notice on safety 8

O

Off axis 39
On axis 39
On/Off 59
Overview 32

P

Parts 66
Personal injury 10
Physical Installation 43
Position 33
Power 59
Power cord 45
Power off 62
Power on 60
Procedures
 Install 43
Projector
 Components 27
Projector Address 51
Projector damage 11
Projector Toolset 41

R

RCU
 Battery 44
Rear projection 18
Remote control
 Usage 52
Restore 57

S

Safety 7
 Battery explosion 11
 Hazard Distance 16, 18
 Hazardous Chemicals 13
 Instructions 10
 Prevent electrical shock 10
 Prevent fire hazard 11
 Prevent personal injury 10
 Prevent projector damage 11
 Safety Data Sheet (SDS) 13
 Servicing 13
Safety Data Sheet (SDS) 13

Safety labels 14
Scheimpflug 48
 Adjustment 48
Scheimpflug's law 48
Shift range 39
Software update 53
Specifications 79

U

UK Compliance 21
User definition 9
UST lens
 Installation 63
 Mounting 72

W

WEEE 21

