



XJ-M146 SIGNATURE SERIES

CASIO Signature series projectors provide high brightness and 1.5X Zoom for use in large and small rooms.

CASIO® Laser & LED Hybrid Light Source

LampFree® Projector

XJ-M146



LampFree Features:

- 2500 lumens
- 1.5X manual zoom
- Expanded input/outputs—RGB, video, HDMI, RS-232C, audio in/out
- Auto brightness adjustment
- Built-in 5w speaker
- DLP technology
- DLP 3D ready
- Closed captioning
- XGA (1024x768) resolution

USB:

- Wireless presentations from PC or Mac
- Built-in memory: 2GB
- Logo Capture – start up screen
- Presentations from your thumb drive
- USB display: send video to the projector from almost any device via an inexpensive USB cable
- RJ-45 – Wired LAN for projector control and management

LampFree Benefits:

- Laser & LED Hybrid Light Source
- Mercury Free
- Quick Start (8 seconds to full brightness)
- Instant Off – no cool down required
- 20,000 Hour Operating Life
- No Lamp Replacement
- No Down Time
- Low Power Consumption
- Intelligent Brightness Control

Continuous Operation:

The cool-running XJ-M146 Signature Line projector has the ability to run all day, every day in extended-use applications* including digital signage, museum displays and other challenging environments. Run the XJ-M146 worry-free, knowing you will not shorten its expected life or damage the projector's bright, high-impact images. (Projectors must be reset once a day when operated in continuous operation applications).

* Extended Use Applications are defined as operation of 10 hours per day for 5 or more days per week. Under these conditions the light source warranty is one (1) year or 6000 hours.

Low Carbon Footprint:


Eco Mode can save as much as 50%, and we link it to an ambient light sensor, producing great images by automatically adjusting the projector brightness to the brightness of the room.

Warranty Information:

3 year warranty on the projector and 3 years (or 6,000-hour usage) on the light source. Education market - 3 year warranty on the projector or 5 years (10,000 hour usage) on the light source.

* Extended Use Applications are defined as operation of 10 hours per day for 5 or more days per week. Under these conditions the light source warranty is one (1) year or 6000 hours.

© 2014 Casio America, Inc. All rights reserved. Casio is a registered trademark of Casio Computer Co., Ltd. in the United States and/or other countries. Specifications were thought to be correct at time of publication. All specifications and features are subject to change without notice. DLP, the DLP logo and the DLP medallion are trademarks of Texas Instruments. XGA and WXGA are registered trademarks of International Business Machines Corporation in the United States. HDMI is a trademark or registered trademark of HDMI Licensing, LLC. MobiShow is a registered trademark of Awind Inc. iPhone, iPad and iPod are registered trademarks of Apple Inc. Android is a trademark of Google Inc. Other product names or company names on this specification brochure are either trademarks or registered trademarks of their respective owners.

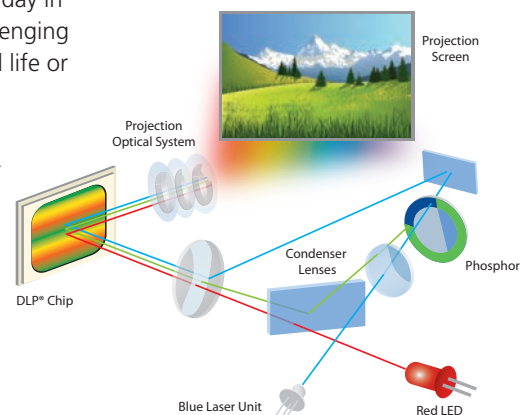

CASIO Projector Specifications

	Signature Series XJ-M146
	XGA
Native Resolution	1024 x 768
Native Aspect Ratio	4:3
Brightness	2500 lumens
Display Device	0.55-inch DLP® chip
Contrast Ratio	1800:1
Lens Type	1.5X Manual Zoom & Focus
Lens Specs F/f	F2.31-2.73/f 18.9-27.2 mm
Lens Offset	50%
Light Source	Casio Laser & LED Hybrid (Up to 20,000 Hours)
Screen Size (Min-Max)	30 to 300-inch diagonal
Projection Range	
60-inch screen	6.6 ~ 9.9 ft
100-inch screen	11.2 ~ 16.1 ft
Minimum Throw Distance	3.3 ft
Throw Ratio	1.64-2.46:1
Keystone Correction	Vertical +30° (Auto) Vertical + or - 30° (Manual)
Color Reproduction	Full color (16.77 million colors)
Power Source	AC 100~240V, 50/60Hz
Power Consumption	Bright mode : 165W Eco 1 mode : 135W
Standby	0.12 w (LAN OFF), 2.3 w (LAN ON)
TERMINAL CONNECTIVITY	
Video Signal Compatibility	
Video Systems	NTSC/ PAL/ PAL-N/ PAL-M/ PAL60/ SECAM
DTV/HDTV	480i/480P/576i/576P/720P/1080i/1080p
Maximum Computer Input	UXGA (1600 x 1200)
INPUTS	
RGB/Component Video Input	mini D-Sub 15 pin x 1 (Also use as YCbCr/YPbPr input— commercially available adapter required)
HDMI	HDMI Type A x 1 (480p~1080p)
USB Display	Yes
Composite Video	Composite Video (RCA) x 1, S-Video x 1
Audio	RCA (R/L) x1, Stereo mini x 1
Built-in Memory	Yes
USB	2GB (PDF, JPEG, BMP, PNG, GIF, AVI, MOV, MP4)
Logo Transfer	Type A (USB2.0) x1 / Micro B(USB2.0) x1
Wireless Capability	Micro B(USB1.1) x1
IEEE802.11 b/g/n compatible	Wireless LAN Adapter (YW-40)
OUTPUTS	
Audio	Stereo Mini x 1
Microphone (dynamic compatible)	No
AUDIO AND CONTROL SYSTEMS	
Audio system	5W x1 Monaural Speaker
Control Terminal	
RS-232	RS-232C (D sub 9 pin) x 1 Cross Cable (Null Modem) required)
LAN	RJ-45 x 1
Control System Compatibility	AMX, Crestron, Extron, SP Controls, PJLink
OTHER INFORMATION	
Usage Environment	
Operating Temp/Humidity	41~95°F / 20~80% (non condensation)
High Altitude Mode	Yes (for operation 5,000~10,000 ft)
Extended operation (24 x 7)	Yes — Note: Projector must be turned off once every 24 hours
Rotation Projection	90 degrees Left/Right (Portrait) / 90 degrees (Up/Down)
Remote Control Range	16.4 ft Maximum
Security Compatibility	Kensington™ Compatible / Power On Password
Ceiling Mountable	Yes, available and sold separately by 3rd party vendors
Ceiling Mount Screws	Type x Qty) M3 x 3, not included (Insert depth 5-7 mm)
Limited Warranty	3 years Parts and Labor plus 3 years or 6,000 hours light source, see Warranty Statement included with product for complete details.
Included Accessories	Wireless remote control, YW-40 Wireless adapter, 6' RGB cable, 6' AC Power Cord, Setup Manual (Printed)
Included Software	Network Connection (Windows® and Mac) EZ-Converter FA (Windows®)
Optional Accessories	Active Shutter 3D Glasses (YA-G30)/ 2D-3D Conversion Software (YA-D30)
Cabinet Color	White / Light Gray Trim
Dimension (W x D x H)	
Including Projections	12.24 x 9.61 x 3.31 in
Excluding Projections	12.24 x 9.61 x 3.23 in
Weight	8.6 lbs
Packing Information	
Carton Dimensions	16.5"L x 14.5"W x 6.5"H
Carton Weight	14.1lbs
UPC Code	079767466879
Manufactured in	Japan