

Multiple lens options for greater installation flexibility.



Lens		FL-701	SL-702	ML-703	LL-704	UL-705
<b>Zoom Ratio</b>		Fixed	x 1.5	x 2.0	x 1.7	x 1.7
<b>F Number</b>		1.8	1.6 (Wide) - 2.0 (Tele)	1.6 (Wide) - 2.9 (Tele)	1.7 (Wide) - 2.0 (Tele)	1.7 (Wide) - 2.0 (Tele)
<b>Focal Length</b>		13 mm	19 mm (Wide) - 29 mm (Tele)	24 mm (Wide) - 48 mm (Tele)	46 mm (Wide) - 79 mm (Tele)	77 mm (Wide) - 133 mm (Tele)
<b>Dimensions (W x H x L)</b>		5.8" x 4.4" x 7.4"	5.8" x 4.4" x 7.0"	5.8" x 4.4" x 7.0"	5.8" x 4.4" x 8.7"	5.8" x 4.4" x 8.4"
<b>Weight</b>		2.6 lbs.	1.8 lbs.	2.2 lbs.	3.5 lbs.	3.7 lbs.
<b>Supplied Accessories</b>		User's manual, lens cap	User's manual, lens cap	User's manual, lens cap	User's manual, lens cap	User's manual, lens cap
<b>Image Size</b>		30" - 600"	30" - 600"	30" - 600"	30" - 600"	30" - 600"
<b>Lens Shift Position</b>						
Vertical	8970	1 : 1	9 : -1 - 1 : 1	9 : -1 - 1 : 1	9 : -1 - 1 : 1	9 : -1 - 1 : 1
	8972W	1 : 1	5 : -1 - 1 : 1	5 : -1 - 1 : 1	5 : -1 - 1 : 1	5 : -1 - 1 : 1
	8971	1 : 1	9 : 1 - 1 : 1	10 : 0 - 1 : 1	9 : 1 - 1 : 1	9 : 1 - 1 : 1
	8976SX					
	8973W					
	8974WU 8975WU	1 : 1	10 : 0 - 1 : 1	10 : 1 - 1 : 1	10 : 0 - 1 : 1	10 : 0 - 1 : 1
Horizontal	8970	1 : 1	10 : 0 - 0 : 10	10 : 0 - 0 : 10	10 : 0 - 0 : 10	10 : 0 - 0 : 10
	8972W					
	8971					
	8976SX					
	8973W	1 : 1	6 : 4 - 4 : 6	10 : 4 - 4 : 6	6 : 4 - 4 : 6	6 : 4 - 4 : 6
	8974WU 8975WU					

Dukane Projector Model	Resolution Format	ANSI Lumens
8970	XGA	5,000
8972W	WXGA	4,000
8971	XGA	6,000
8976SX	SXGA	5,000
8973W	WXGA	5,500
8974WU	WUXGA	4,000
8975WU	WUXGA	5,000

# 700 Series Lenses

## DUKANE CORP

Audio Visual Products  
 2900 Dukane Drive, St. Charles, Illinois 60174  
 Toll-free: 888-245-1966 • Fax: 630-584-5156  
 E-mail: avsales@dukane.com  
 www.dukane.com/av



## Projection Distance For Optional Lenses (when projecting onto a 100" diagonal screen)


### FL-701 (Fixed lens)

8972W: 88" (2.2 m)  
8970: 83" (2.1 m)  
8973W: 71" (1.8 m)  
8971: 67" (1.7 m)  
8974WU/8975WU: 69" (1.8 m)  
8976SX: 66" (1.7 m)




### SL-702

8972W: 127" - 192" (3.2 - 4.9 m)  
8970: 120" - 181" (3.1 - 4.6 m)  
8973W: 102" - 154" (2.6 - 3.9 m)  
8971: 97" - 145" (2.5 - 3.7 m)  
8974WU/8975WU: 100" - 151" (2.5 - 3.8 m)  
8976SX: 96" - 144" (2.4 - 3.7 m)




### ML-703

8972W: 162" - 321" (4.1 - 8.1 m)  
8970: 153" - 303" (3.9 - 7.7 m)  
8973W: 129" - 257" (3.3 - 6.5 m)  
8971: 122" - 242" (3.1 - 6.2 m)  
8974WU/8975WU: 127" - 252" (3.2 - 6.4 m)  
8976SX: 121" - 241" (3.1 - 6.1 m)

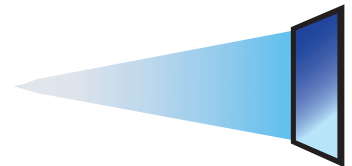


### LL-704

8972W: 305" - 520" (7.8 - 13.2 m)  
8970: 288" - 490" (7.3 - 12.4 m)  
8973W: 244" - 415" (6.2 - 10.5 m)  
8971: 231" - 392" (5.9 - 10.0 m)  
8974WU/8975WU: 240" - 407" (6.1 - 10.3 m)  
8976SX: 229" - 389" (5.8 - 9.9 m)

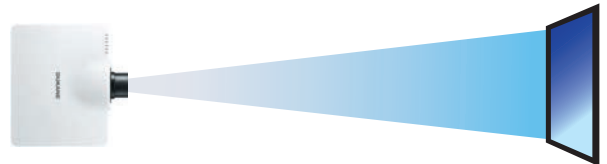

### UL-705

8972W: 516" - 879" (13.1 - 22.3 m)  
8970: 487" - 830" (12.4 - 21.1 m)  
8973W: 415" - 705" (10.5 - 17.9 m)  
8971: 393" - 667" (10.0 - 16.9 m)  
8974WU/8975WU: 407" - 691" (10.3 - 17.6 m)  
8976SX: 390" - 662" (9.9 - 16.8 m)

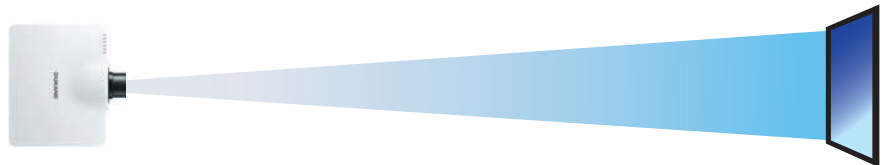

All specifications subject to change without notice.

# 700 Series Lenses

## DUKANE CORP

Audio Visual Products  
2900 Dukane Drive, St. Charles, Illinois 60174  
Toll-free: 888-245-1966 • Fax: 630-584-5156  
E-mail: avsales@dukane.com  
www.dukane.com/av