
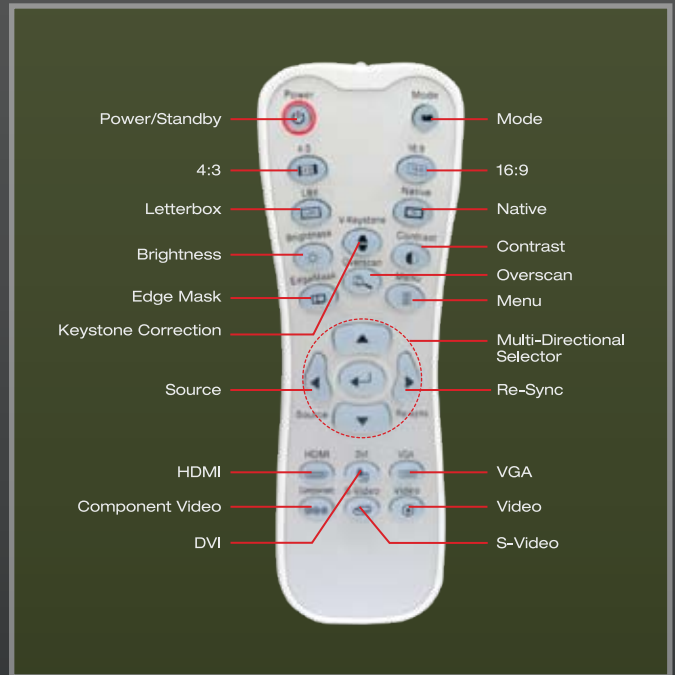


Crossover Strength and Capacity

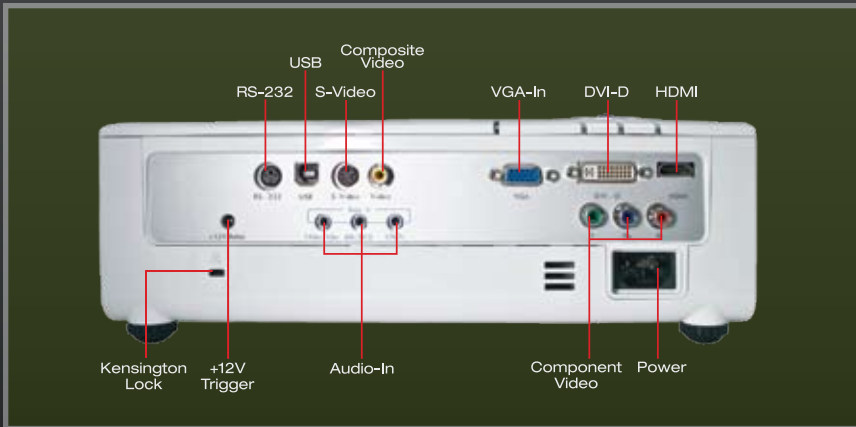

With amazing picture quality and a high brightness level of 2400 lumens, the Optoma HD71 expands the versatility of the home theater projector. The Optoma HD71 is the ideal crossover projector, perfect for both home and business use. Featuring a multitude of connectivity options and the latest in multi-color processing capabilities, the HD71 delivers rich and deep textures with ease in non-light controlled environments.

HD71 FEATURES


- ❑ Ultra-bright home theater projector at 2400 lumens
- ❑ Native 720p (1280x720) resolution
- ❑ Multiple HD inputs, including: HDMI v1.3, DVI w/ HDCP and component
- ❑ DLP® chipset and color processing technologies from Texas Instruments
- ❑ Weighs 6.3 pounds

HD71 Home Theater

Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	53.3	48.6
8	71.1	64.8
10	88.8	81.0
12	107.0	97.2
14	124.0	113.0
16	142.0	130.0
18	160.0	146.0

Control Panel

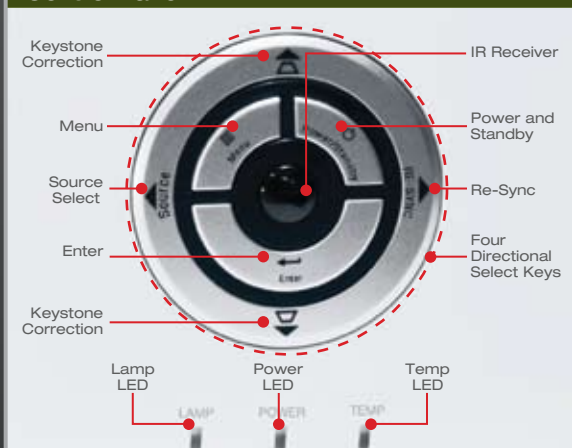

Optional Accessories

Lamp:	BL-FP200E
Mount:	BM-1015N
Remote:	BR-3040B
DVI-D Cable (5m):	BC-DDDDXX05
HDMI Cable (5m):	BC-HMHMXX05
DVI-D Male to HDMI Female Adapter:	BC-DIHMXY00
S-Video Cable (5m):	BC-SVSVXX05
92" 16:9 Manual Pull-Down Screen::	DS-9092PM

Specifications

Display Technology:	Single 0.65" DarkChip2™ DLP® Technology by Texas Instruments
Resolution:	Native 720p (1280 x 720)
Brightness (Typical):	2400 ANSI Lumens
Contrast Ratio:	4,000:1 in ImageAI™ Mode 3000:1 (Full On/Full Off)
Lamp Life (STD/Bright):	Estimated at 3000/2000 Hours
Lamp Type:	200W P-VIP
Throw Ratio:	1.55-1.7:1 (Distance/Width)
Image Size (Diagonal):	40" to 293" (1.0 to 7.4 m)
Projection Distance:	4.9' to 32.8' (1.5 to 10 m)
Noise Level (STD/Bright):	27dB/29dB
Remote Control:	Fully Featured Wireless IR Remote with Direct Source Selection
Computer Compatibility:	SXGA+, WXGA, XGA, SVGA, VGA, VESA, PC and Macintosh Compatible
Video Compatibility:	Full NTSC, PAL, SECAM, HDTV (720p, 1080i), SDTV (480i/p, 576i/p)
Aspect Ratio:	Native 16:9 with 4:3, LBX Support
Projection Lens:	F=-2.46 ~-2.58, f=-21.79~-23.99 mm; 1.1x Manual Zoom and Focus
Offset:	15%
User Controls:	Complete On Screen Menu Adjustments in 22 Languages
Keystone Correction:	Digital Horizontal and Vertical
Power Supply:	AC Input 100 - 240V, 50-60 Hz
Power Consumption:	270 Watts (Maximum), <10 Watts (Standby)
Weight:	6.3 lbs (2.9 kg)
Dimensions (W x H x D):	11.5" x 3.7" x 8.6" (295 x 96 x 222 mm)
Operating Temperature:	5 - 35°C, 80% Max Humidity
Displayable Colors:	16.7 Million
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	80%
Security:	One Kensington® Lock Port
I/O Connectors:	HDMI v1.3, Component Video, S-Video, VGA-In, Composite Video (RCA), DVI w/HDCP, RS-232, +12V Trigger Relay, Three Audio-In
Standard Accessories:	AC Power Cord, Component Video Cable, Composite Video Cable, Remote Control, Batteries for Remote, Lens Cap, Quick Start Guide, Warranty Card and User's Manual
Optional Accessories:	Bering™ Ceiling Mount, Carrying Case, HDMI to HDMI Cable, DVI to DVI Cable, Gold Service Warranty and Panoview™ Series Screens
Warranty:	1 Year Limited Parts and Labor, 90 Days on Lamp
UPC:	796435 21 108 0

www.OptomaUSA.com

