


Brilliant Images, Long-term Reliability

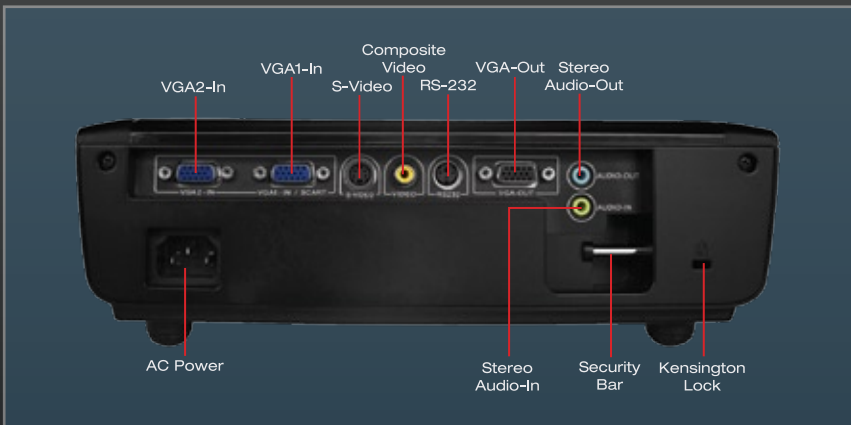

TX536 FEATURES

- ❑ Native XGA resolution
- ❑ Rich color display - Texas Instruments DLP® with BrilliantColor™ Technology
- ❑ Wide range of connectivity options: two VGA-in, VGA-out, s-video, composite video, audio-in, audio-out and RS-232
- ❑ Protect your investment – control panel lock, security bar and password protection
- ❑ Eco-friendly power consumption – sub-one watt standby mode
- ❑ Rapid power-on and shutdown – no waiting
- ❑ 3 years express replacement service and one year lamp warranty

Designed for the demanding requirements of schools and businesses, the Optoma TX536 offers 2800 ANSI lumens and 3000:1 contrast ratio to project large, crisp and brilliant high contrast images to keep audiences engaged. Features such as filter-free design, a dependable long-life DLP chip, extended lamp life guarantee, and low standby power consumption contribute to save you money in the long

TX536 | Multimedia Projector

Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	42	38
8	56	51
10	71	64
12	85	77
14	99	90
16	113	102
18	127	115

Control Panel



Optional Accessories

Lamp:	BL-FU185A
Remote:	BR-3043N
VGA Cable (1.8m):	BC-VGVGX02
Power Cord (1m):	BC-PUPIX01
Power Cord (11m):	BC-PUPIX01
S-Video Cable (1.8m):	BC-SVSVX02
Composite Cable (1.8m):	BC-COCOX02
VGA to Component Cable (1.8m):	BC-VGCRX02
VGA to Component Adaptor:	BC-VGCRXY00
Ceiling Mount:	BM-5001U
Carrying Case:	BK-4006
100" Matte White 4:3 Manual Pull-Down Screen:	DS-3100PM

Specifications

Display Technology:	Single 0.55" DMD DLP® Technology by Texas Instruments
Resolution:	Native XGA (1024 x 768)
Maximum Resolution:	HD (1920 x 1080)
Brightness (Typical):	2800 ANSI Lumens
Contrast Ratio:	3000:1 (Full On/Full Off)
Lamp Type:	185W UHP
Lamp Life (STD/Bright):	Estimated at 4000/3000 Hours
Throw Ratio:	1.95 to 2.15:1 (Distance/Width)
Image Size (Diagonal):	22.9" to 300" (0.58 to 7.62 m)
Projection Distance:	3.28' to 32.8' (1.0 to 10 m)
Noise Level (STD/Bright):	28dB/30dB
Remote Control:	IR Remote Control
Computer Compatibility:	UXGA, WXGA, SXGA+, SVGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
Aspect Ratio:	4:3 Native, 16:9 & 16:10 Compatible
Projection Lens:	F=2.41-2.55, f=21.8-23.98 mm, 1.1x Manual Zoom and Focus
Offset:	115%
Monitor Loop Through:	D-Sub 15-Pin VGA Output (Functional in Both Normal and Standby Modes)
User Controls:	Complete On-Screen Menu in 23 Languages
Audio:	2-Watt Speaker
Keystone Correction:	± 40° Vertical
Vertical Refresh Rate:	24 to 85 Hz
Horizontal Scan Rate:	15.3 to 91.1 KHz
Power Supply:	AC Input 100-240V, 50-60Hz, Auto-Switching
Power Consumption:	255 Watts (Bright), 230 Watts (STD), <1 Watts (Standby)
Weight:	5 lbs (2.27 kg)
Dimensions (W x H x D):	11.28" x 3.98" x 7.6" (287 x 101 x 193 mm)
Operating Temperature:	41° to 95°F (5° to 40°C), 85% Max Humidity, Adjustable Fan Speed for High Altitude Application
Displayable Colors:	1.07 Billion
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	Kensington® Lock, Keypad Lock, Security Bar
I/O Connectors:	Two VGA-In, VGA-Out, S-Video, Composite Video, Stereo Audio-In, Stereo Audio-Out and RS-232
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Remote Control, Batteries for Remote, Carrying Case, Lens Cap, Quick Start Card, CD-ROM User's Manual and Warranty Card
Optional Accessories:	Ceiling Mount, VGA Cable, S-Video Cable, Composite Video Cable, RS-232 Cable and Panoview Series Screens
Warranty:	Three Years Optoma Express Replacement Service, One Year on Lamp
UPC:	796435 41 139 8

www.OptomaUSA.com



All Specifications are subject to change without notice. ©2009 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.